



# Steel Foundation Solutions


General Catalogue 2027

**New standard**

EN 10248 - Part 1&2

EN 10249 - Part 2




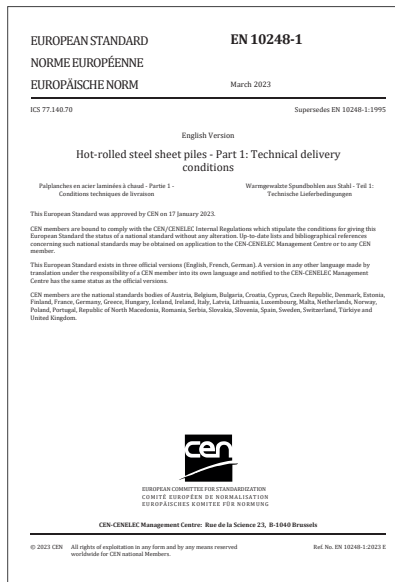

## Standard EN 10248-1:2023 New version

In comparison with the previous edition of 1995, the following technical modifications have been made:


- Document was restructured;
- Normative references were updated;
- Grades S460 and S500 in quality GP were introduced;
- Modification concerning the maximum values for the chemical composition;
- Addition of 7.4.3 dedicated for hot-dip zinc-coating and 7.8 for load bearing capacity;
- New wording for Clauses 8, 9 and 10 for inspection and testing;
- Addition of Clause 12 on the complaints;
- Removal of the former Annexes B and C on Euronorms and equivalent designations;
- Addition of the Annexes B, C, D and E.

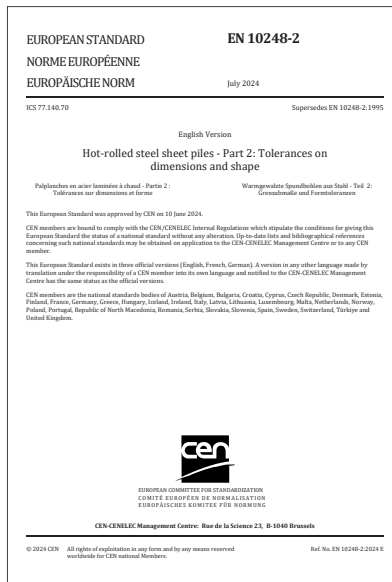

## Standard EN 10248-2:2024 New version

This new version includes the following significant technical changes with respect to EN 10248-2:1995

- Restructure of the standard;
- Update of the normative references and general requirements;
- Review of the sketches;
- New wording for Clause 10;
- New wording for Clause 11 about the mass tolerance;
- Insertion of a new Table 15 about the misalignment of the head of sheet piles;
- Revised definitions of dimensions for delivery conditions and tolerances.

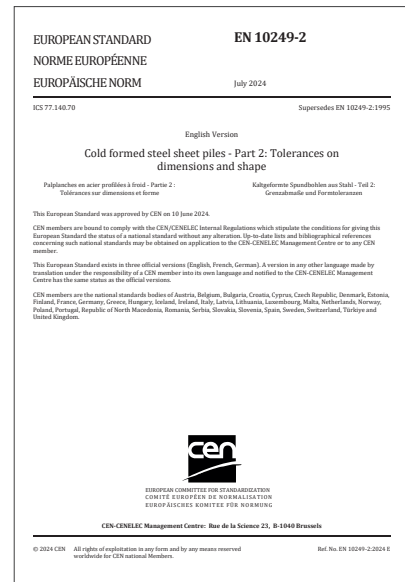


## Standard EN 10249-2:2024 New version

This new version includes the following significant technical changes with respect to EN 10249-2:1995

- Restructure of the standard;
- Update of the normative references and general requirements;
- Addition of a new Table 2 with the tolerance on the width;
- Adaptation of the terms "sweep" and "bow" in 8.2 and 8.3;
- New wording for Clause 11 about the mass tolerance;
- Addition of two figures in Clause 13 about interlocks.



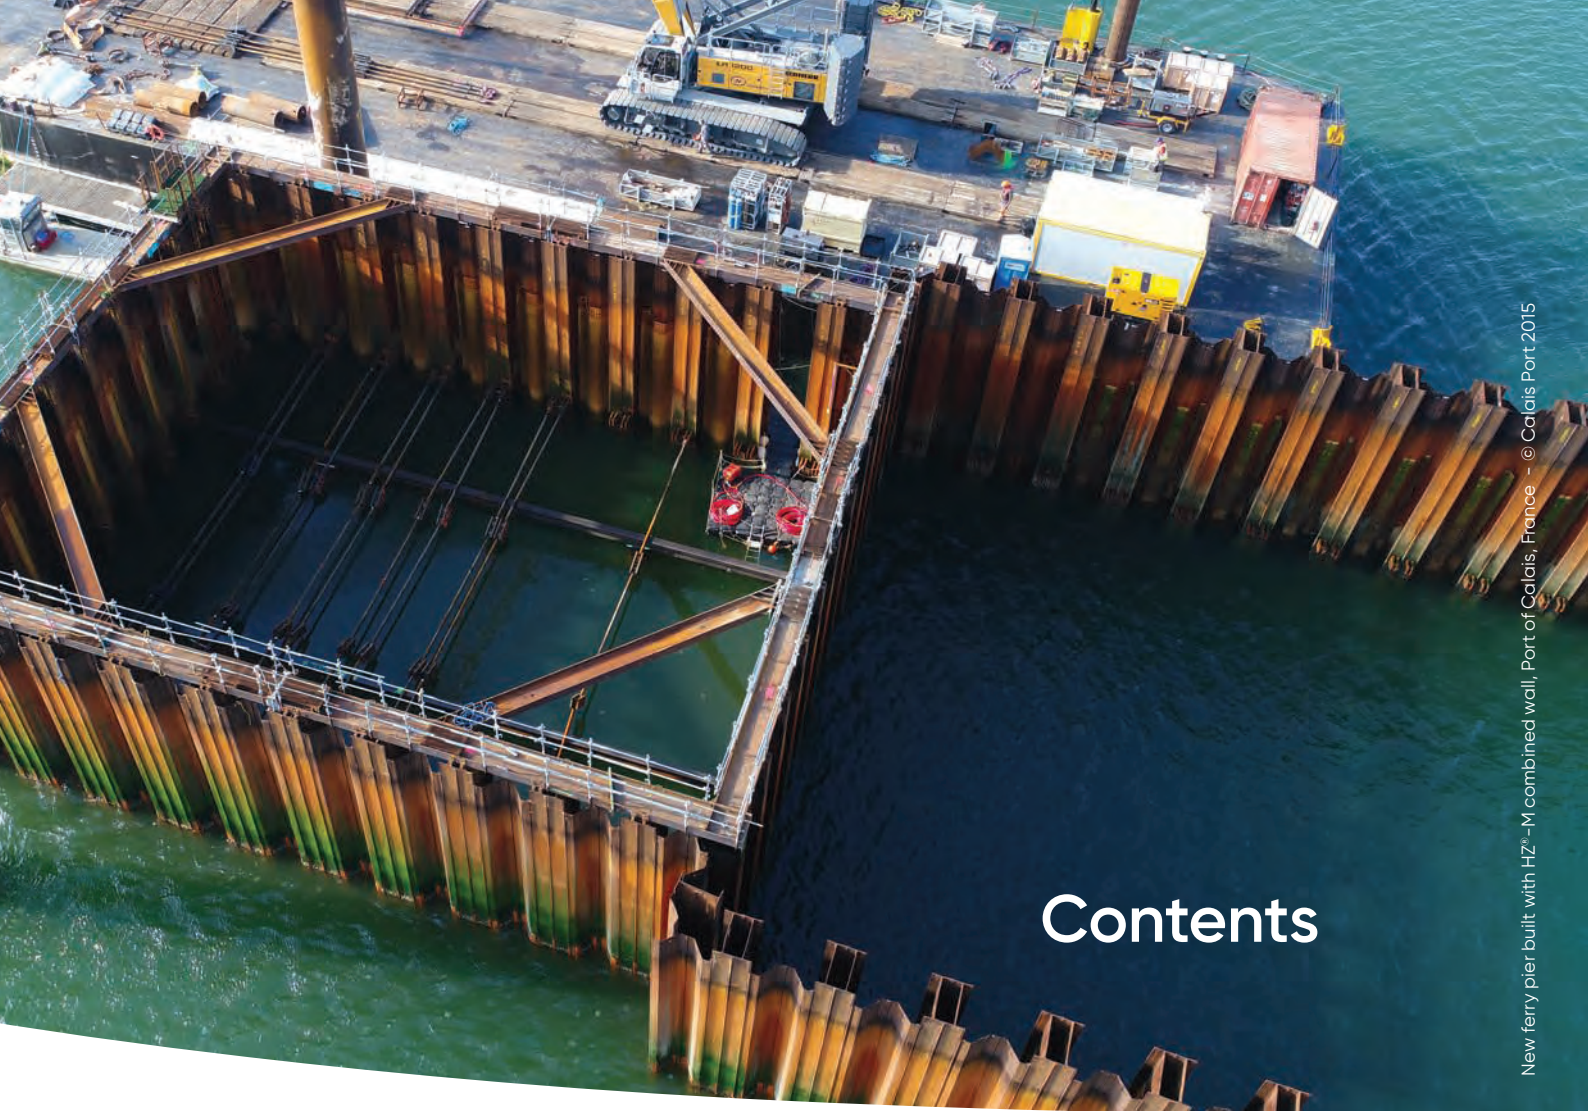

# Contents

|                                 |    |
|---------------------------------|----|
| Introduction                    | 4  |
| Z-Sections                      | 6  |
| U-Sections                      | 16 |
| HZ® / AZ® combined wall system  | 27 |
| AS 500® straight web sections   | 29 |
| Box piles                       | 33 |
| Jagged walls                    | 38 |
| Combined walls                  | 41 |
| Cold formed steel sheet piles   | 44 |
| Steel tubes for foundations     | 48 |
| Driving caps                    | 49 |
| HP piles                        | 52 |
| Durability of steel sheet piles | 53 |
| AMLoCor®                        | 56 |
| Watertightness                  | 57 |
| AKILA® sealing system           | 58 |
| Sustainability & EPD            | 59 |
| Delivery conditions             | 62 |
| Documentation                   | 69 |



## Water transport solutions

Build sustainable and durable maritime port and waterway infrastructures with our steel solutions. Quay walls made with steel sheet piles allow up to **20% faster construction and 15% lower cost\*** when compared with alternative materials. Steel is also the material of choice for breakwaters, dolphins, locks and canals.

The lifetime return on investment of ports built with ArcelorMittal AZ® steel sheet piles exceeds by 8%\* the financial result brought by concrete solutions. **AMLoCor® steel grades are up to 5 times more corrosion-resistant** than standard steel grades, allowing optimised designs with service life of up to 100 years.

A specific Environmental Product Declaration based on comprehensive Life Cycle Analyses is available for ArcelorMittal steel sheet piles and EcoSheetPile™ Plus made of 100% recycled steel and with 100% renewable electricity. With the intrinsic ductility of steel, sheet piling solutions in conjunction with modern performance-based design methods help design and optimise safe ports in seismic areas.

\* Results from a study by Tractebel, Belgium (2019).

**Water based transport is essential to our global economy**



Water  
Transport  
Solutions

Ribécourt, France. © NGE Fondations



Hazard  
Protection  
Solutions

Flood protection barrier protecting the city of St-Pierre de Gaubert, France

## Hazard protection solutions

Dykes, flood and erosion protection barriers made with steel sheet piles are one of the most efficient ways of protecting against floods and rising sea levels.

A dedicated design methodology for reinforcements and upgrades of existing flood protection systems using steel sheet piles leads to **up to 40% savings\***.

A recent multi-criteria analysis confirms that dyke reinforcement with **steel sheet pile can deliver over 20% cost savings**, reduce construction time by up to 50%, and cut lifecycle carbon emissions by up to 50% compared to alternative solutions.\*\*

Requiring little equipment and manpower, **steel sheet piles can be quickly installed** with guaranteed quality, even in remote locations.

AZ®-800, the widest sheet piles on the market, allow up to 14% less installation time. Dixeran® declutching detectors ensure against the loss of integrity of a sheet pile wall. Sealing systems such as AKILA® improve the imperviousness of the structures.

\* Study by multi-disciplinary research team in the Netherlands (POV Macrostability, 2020).

\*\* Multi-criteria analysis of methods for reinforcing earth-dykes against internal erosion (Egis, 2025).

**Safeguarding our communities from natural disasters**



## Mobility infrastructure solutions

Composite bridges with steel sheet pile abutments have **up to 10% shorter construction time and up to 15% less economic impact** on the community throughout their service life\*. Permanent steel sheet pile walls in underground car parks of 2 to 3 levels are **up to 50% more cost-effective\*\*** and have at least 55% lower global warming potential\*\*\* than walls built with alternative materials, with significantly shorter execution time. They also maximise the available space within the building.

Silent and low vibration installation techniques minimise disruption in urban settings. **Steel sheet piles can be reused several times and are recyclable**, reducing the global environmental impact of projects.

\* Study by Karlsruher Institut für Technologie (KIT), Germany (2019).

\*\* Study by Royal Haskoning DHV, the Netherlands (2019).

\*\*\* Study by GRBV/ArcelorMittal Global R&D, Germany/Luxembourg (2023)

**Efficient and reliable mobility infrastructures make your journey smoother and safer**



**Mobility Infrastructure Solutions**

Underground car park with permanent steel sheet pile walls at Hopmarkt shopping center, Aalst, Belgium

## Environmental protection solutions

Steel sheet piles are used as temporary and permanent retaining walls for landfill conversion, polluted soil remediation, riverbed cleaning operations and pollution containment.

**Sealing systems such as AKILA® ensure the retaining walls are impervious**, while suitable for contact with groundwater.

Enclosures retaining contaminated soils can be created even faster with the **unique 800 mm wide AZ®-800 steel sheet piles**.

ArcelorMittal EcoSheetPile™ Plus has a much lower carbon footprint than other steel sheet piles\*. This product range is the ideal solution to reduce the environmental impact of all retaining walls.

\* Environmental Product Declaration for EcoSheetPile™ Plus (2021), based on a life-cycle analysis with "cradle-to-gate with options" methodology.

**When faced with pollution risks, containment is vital**



**Environmental Protection Solutions**

Fish pass at Sauveterre hydroelectric dam on river Rhône, France, allowing the restoration of the migration path of several fish and wildlife species.



# Introduction

ArcelorMittal is the world's leading steel and mining company. ArcelorMittal is also the world's largest manufacturer of sustainable hot-rolled steel sheet piles. ArcelorMittal Sheet Piling oversees the sales, marketing and promotion of foundation solutions that include the following products manufactured in these ArcelorMittal mills:

- hot rolled steel sheet piles: Belval and Differdange in Luxembourg, Dabrowa in Poland;
- cold formed steel sheet piles: "Palfroid" in Messempré, France;
- steel tubes (for foundations): Dintelmond, The Netherlands (for EU markets);
- steel bearing piles: Belval and Differdange in Luxembourg.

ArcelorMittal Sheet Piling offers a complete solution package, that includes also accessories (such as anchoring material, walers, fabricated piles, driving caps, etc.) with a full technical support from the conceptual design to the final installation process and additional features and services (such as special fabrications, coating, sealant material for the interlocks, etc).

ArcelorMittal Belval is the world's largest rolling mill of hot rolled steel sheet piles and has been playing a leading role in the development of piling technology for over 100 years. The first steel sheet piles were rolled in 1911 and 1912: the "Ransome" and "Terre Rouge" piles. Since then, the product range of ArcelorMittal's mill in Belval has undergone constant improvement and development to include AZ® sections up to 800 mm wide and U-type sections up to 750 mm wide (AU). One rolling mill in Belval is dedicated solely to the production of steel sheet piles.

ArcelorMittal Differdange produces the large HZ®-M sections to form the most competitive HZ/AZ high section modulus combined wall system.

ArcelorMittal Dabrowa manufactures a wide range of hot rolled U-type sheet piles.


ArcelorMittal steel sheet piles are manufactured in Europe. Our values are sustainability, quality and leadership. We offer the most complete range of products and services, focused on bringing the most to our customers. ArcelorMittal Sheet Piling provides cost-competitive solutions and certified quality for its customers, while considering society's expectations for a more circular and less carbon-intensive economy.

ArcelorMittal's piling series are especially suitable for quickly and reliably building cost-effective structures. They are characterised by excellent section properties, for instance a highly competitive ratio of section modulus to weight, as well as high moments of inertia. Steel sheet piles and foundation products are manufactured according to the European standards, but they can also be supplied according to other international standards (e.g. ASTM).

**Decarbonisation** is a key pillar of ArcelorMittal's long-term strategy. For several years already, the EcoSheetPile™ range has been produced from 100% recycled, recyclable and reusable steel. It is a major contributor to the circular economy.

Launched in 2021, the **EcoSheetPile™ Plus** brand, an essential part of ArcelorMittal's **XCarb® recycled and renewably produced** initiative, combines recycled steel with 100% renewable electricity. It contributes to the Group's ambition to achieve net-zero greenhouse gas emissions by 2050.

As project owners start integrating green credentials assessment rules in their tendering processes with fair monetization processes, bids that offer sustainable construction solutions with a reduced carbon footprint have a tangible advantage.

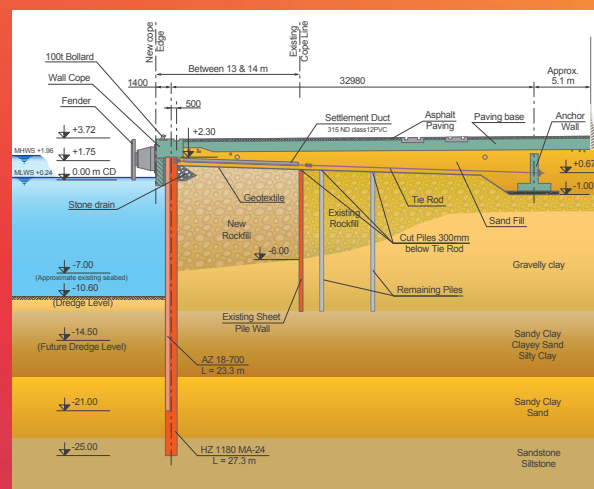

Preliminary design for a quay wall



Belval steel works, Luxembourg, 1930s



Sheet pile catalogues, 1912



## Design office and technical assistance

Our technical experts offer a comprehensive service and outstanding support to all parties involved in the design, specification and installation of sheet and bearing piles.

The in-house Design Department offers the creation of preliminary designs, including anchorage and corrosion assessment. Using our extensive in-house knowledge of products, grades and design concepts, we support designers to achieve the most efficient design and competitive piling solution for their project, including focusing on carbon footprint reduction using Life Cycle Assessment method.

We also provide software to help design steel sheet piling solutions.

The Technical Department assists with project planning, logistics, design of driving layout plans and installation templates, quality certifications, selection of driving equipment, installation support and on-site expertise.


Our technical experts regularly teach at universities and design consulting offices. They also share their experience at geotechnical and specialised technical seminars throughout the world.




## Customised solutions

ArcelorMittal Sheet Piling provide customised products and solutions that best fit the project requirements. We design and manage special fabrications and ensure on-time delivery to the construction sites.


We can modify the length, width and shape of sheet piles and bearing piles through bending, cutting and welding. We can assemble box piles and corner sections, weld connectors, interlocks and pile toe reinforcements, bore drainage or lifting holes.

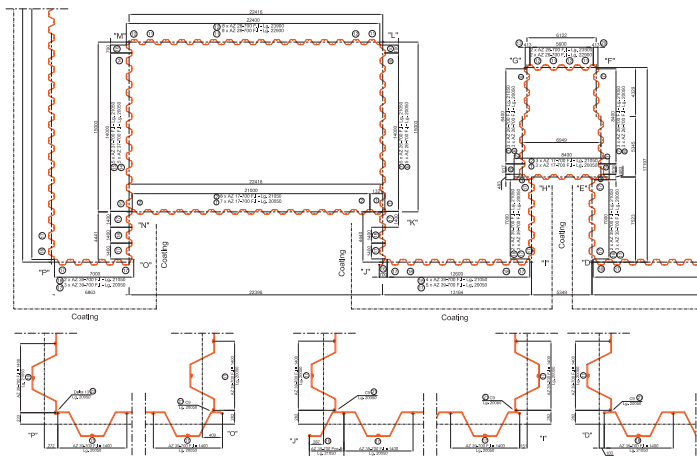

Sheet pile installation drawing

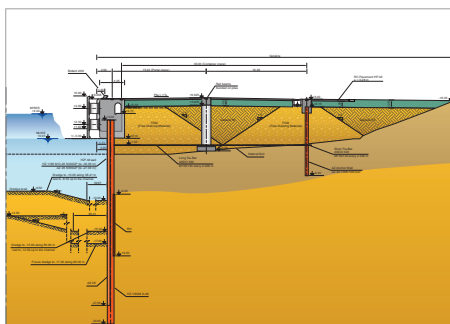


Feasibility studies

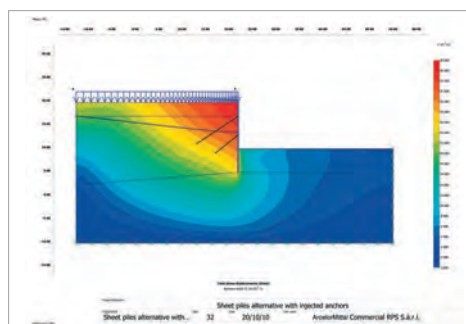


Preliminary design

Our services also include coating for corrosion protection and aesthetics, from a selection of systems and colours including galvanisation and multi-layer painting. We can also apply interlock sealants on demand.

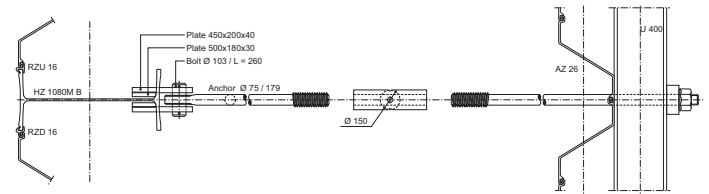

Complete solutions including sheet pile walls, anchors, corner layouts and special piles

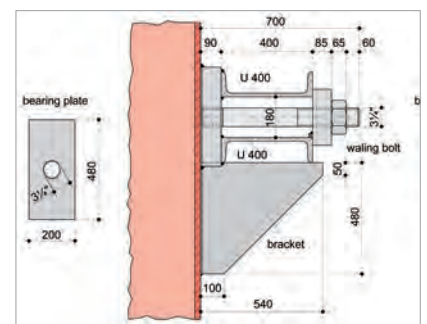


Solutions for execution details

# Z-Sections

The essential characteristics of Z-sections include the continuous form of the web and the location of the interlock symmetrically on each side of the neutral axis.

Both aspects create a positive influence on the section modulus. The AZ<sup>®</sup> series, a section with extraordinary characteristics and the proven qualities of the Larssen interlock, has the following advantages:

- extremely competitive section-modulus-to-mass ratio;
- increased inertia for reduced deflection;
- large width, resulting in competitive installation performance;
- good corrosion resistance, the steel being thickest at the critical corrosion points.

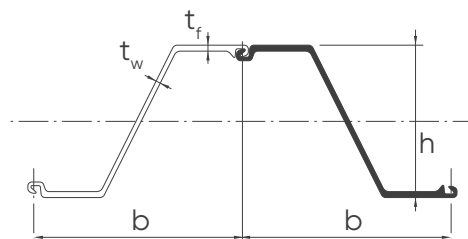

| Section | Width | Height | Thickness      |                | Sectional area     | Mass        |                   | Moment of inertia  | Elastic section modulus | Static moment      | Plastic section modulus | Global Warming Potential <sup>1)</sup> | Class <sup>2)</sup> |          |          |          |          |          |          |          |
|---------|-------|--------|----------------|----------------|--------------------|-------------|-------------------|--------------------|-------------------------|--------------------|-------------------------|----------------------------------------|---------------------|----------|----------|----------|----------|----------|----------|----------|
|         | b     | h      | t <sub>f</sub> | t <sub>w</sub> |                    | single pile | wall              |                    |                         |                    |                         | GWP (A1-A3)                            | S 240 GP            | S 270 GP | S 320 GP | S 355 GP | S 390 GP | S 430 GP | S 460 GP | S 500 GP |
|         | mm    | mm     | mm             | mm             | cm <sup>2</sup> /m | kg/m        | kg/m <sup>2</sup> | cm <sup>4</sup> /m | cm <sup>3</sup> /m      | cm <sup>3</sup> /m | cm <sup>3</sup> /m      | kg CO <sub>2</sub> e/m <sup>2</sup>    |                     |          |          |          |          |          |          |          |

## AZ<sup>®</sup>-800

|                         |     |     |      |      |     |       |     |       |      |      |      |      |   |   |   |   |   |   |   |   |
|-------------------------|-----|-----|------|------|-----|-------|-----|-------|------|------|------|------|---|---|---|---|---|---|---|---|
| AZ 18-800 <sup>3)</sup> | 800 | 449 | 8.5  | 8.5  | 129 | 80.7  | 101 | 41320 | 1840 | 1065 | 2135 | 41.3 | 3 | 3 | 3 | 3 | 3 | 4 | 4 | 4 |
| AZ 19-800               | 800 | 450 | 9.0  | 9.0  | 135 | 84.5  | 106 | 43170 | 1920 | 1115 | 2230 | 43.2 | 3 | 3 | 3 | 3 | 3 | 3 | 4 | 4 |
| AZ 20-800               | 800 | 450 | 9.5  | 9.5  | 141 | 88.6  | 111 | 45050 | 2000 | 1165 | 2330 | 45.4 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 4 |
| AZ 22-800               | 800 | 451 | 10.5 | 10.5 | 153 | 96.4  | 120 | 48790 | 2165 | 1260 | 2525 | 49.1 | 2 | 2 | 3 | 3 | 3 | 3 | 3 | 3 |
| AZ 23-800               | 800 | 474 | 11.5 | 9.0  | 151 | 94.6  | 118 | 55260 | 2330 | 1340 | 2680 | 48.3 | 2 | 2 | 2 | 3 | 3 | 3 | 3 | 3 |
| AZ 25-800               | 800 | 475 | 12.5 | 10.0 | 163 | 102.6 | 128 | 59410 | 2500 | 1445 | 2890 | 52.4 | 2 | 2 | 2 | 2 | 2 | 3 | 3 | 3 |
| AZ 27-800               | 800 | 476 | 13.5 | 11.0 | 176 | 110.5 | 138 | 63570 | 2670 | 1550 | 3100 | 56.4 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 3 |

## AZ<sup>®</sup>-750

|           |     |     |      |      |     |       |     |       |      |      |      |      |   |   |   |   |   |   |   |   |
|-----------|-----|-----|------|------|-----|-------|-----|-------|------|------|------|------|---|---|---|---|---|---|---|---|
| AZ 28-750 | 750 | 509 | 12.0 | 10.0 | 171 | 100.8 | 134 | 71540 | 2810 | 1620 | 3245 | 54.8 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 3 |
| AZ 30-750 | 750 | 510 | 13.0 | 11.0 | 185 | 108.8 | 145 | 76670 | 3005 | 1740 | 3485 | 59.3 | 2 | 2 | 2 | 2 | 2 | 2 | 3 | 3 |
| AZ 32-750 | 750 | 511 | 14.0 | 12.0 | 198 | 116.7 | 156 | 81800 | 3200 | 1860 | 3720 | 63.8 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |

## AZ<sup>®</sup>-700 and AZ<sup>®</sup>-770

|                 |     |     |      |      |     |      |     |       |      |      |      |      |   |   |   |   |   |   |   |   |
|-----------------|-----|-----|------|------|-----|------|-----|-------|------|------|------|------|---|---|---|---|---|---|---|---|
| AZ 12-770       | 770 | 344 | 8.5  | 8.5  | 120 | 72.6 | 94  | 21430 | 1245 | 740  | 1480 | 38.4 | 2 | 2 | 3 | 3 | 3 | 3 | 3 | 3 |
| AZ 13-770       | 770 | 344 | 9.0  | 9.0  | 126 | 76.1 | 99  | 22360 | 1300 | 775  | 1546 | 40.5 | 2 | 2 | 3 | 3 | 3 | 3 | 3 | 3 |
| AZ 14-770       | 770 | 345 | 9.5  | 9.5  | 132 | 79.5 | 103 | 23300 | 1355 | 805  | 1611 | 42.1 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 3 |
| AZ 14-770-10/10 | 770 | 345 | 10.0 | 10.0 | 137 | 82.9 | 108 | 24240 | 1405 | 840  | 1677 | 44.2 | 2 | 2 | 2 | 2 | 2 | 3 | 3 | 3 |
| AZ 12-700       | 700 | 314 | 8.5  | 8.5  | 123 | 67.7 | 97  | 18880 | 1205 | 710  | 1415 | 39.7 | 2 | 2 | 3 | 3 | 3 | 3 | 3 | 3 |
| AZ 13-700       | 700 | 315 | 9.5  | 9.5  | 135 | 74.0 | 106 | 20540 | 1305 | 770  | 1540 | 43.4 | 2 | 2 | 2 | 3 | 3 | 3 | 3 | 3 |
| AZ 13-700-10/10 | 700 | 316 | 10.0 | 10.0 | 140 | 77.2 | 110 | 21370 | 1355 | 800  | 1600 | 45.0 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 3 |
| AZ 14-700       | 700 | 316 | 10.5 | 10.5 | 146 | 80.3 | 115 | 22190 | 1405 | 835  | 1665 | 47.0 | 2 | 2 | 2 | 2 | 2 | 3 | 3 | 3 |
| AZ 17-700       | 700 | 420 | 8.5  | 8.5  | 133 | 73.1 | 104 | 36230 | 1730 | 1015 | 2027 | 42.5 | 2 | 2 | 3 | 3 | 3 | 3 | 3 | 3 |
| AZ 18-700       | 700 | 420 | 9.0  | 9.0  | 139 | 76.5 | 109 | 37800 | 1800 | 1060 | 2116 | 44.6 | 2 | 2 | 3 | 3 | 3 | 3 | 3 | 3 |
| AZ 19-700       | 700 | 421 | 9.5  | 9.5  | 146 | 80.0 | 114 | 39380 | 1870 | 1105 | 2206 | 46.6 | 2 | 2 | 2 | 3 | 3 | 3 | 3 | 3 |
| AZ 20-700       | 700 | 421 | 10.0 | 10.0 | 152 | 83.5 | 119 | 40960 | 1945 | 1150 | 2296 | 48.7 | 2 | 2 | 2 | 2 | 2 | 3 | 3 | 3 |



| Section | Width | Height | Thickness      |                | Sectional area     | Mass        |                   | Moment of inertia  | Elastic section modulus | Static moment      | Plastic section modulus | Global Warming Potential <sup>1)</sup> | Class <sup>2)</sup> |          |          |          |          |          |          |          |
|---------|-------|--------|----------------|----------------|--------------------|-------------|-------------------|--------------------|-------------------------|--------------------|-------------------------|----------------------------------------|---------------------|----------|----------|----------|----------|----------|----------|----------|
|         | b     | h      | t <sub>f</sub> | t <sub>w</sub> |                    | single pile | wall              |                    |                         |                    |                         | GWP (A1-A3)                            | S 240 GP            | S 270 GP | S 320 GP | S 355 GP | S 390 GP | S 430 GP | S 460 GP | S 500 GP |
|         | mm    | mm     | mm             | mm             | cm <sup>2</sup> /m | kg/m        | kg/m <sup>2</sup> | cm <sup>4</sup> /m | cm <sup>3</sup> /m      | cm <sup>3</sup> /m | cm <sup>3</sup> /m      | kg CO <sub>2</sub> e/m <sup>2</sup>    |                     |          |          |          |          |          |          |          |

### AZ<sup>®</sup>-700 and AZ<sup>®</sup>-770

|            |     |     |      |      |     |       |     |        |      |      |      |       |   |   |   |   |   |   |   |  |
|------------|-----|-----|------|------|-----|-------|-----|--------|------|------|------|-------|---|---|---|---|---|---|---|--|
| AZ 24-700  | 700 | 459 | 11.2 | 11.2 | 174 | 95.7  | 137 | 55820  | 2430 | 1435 | 2867 | 56.0  | 2 | 2 | 2 | 2 | 2 | 3 | 3 |  |
| AZ 26-700  | 700 | 460 | 12.2 | 12.2 | 187 | 102.9 | 147 | 59720  | 2600 | 1535 | 3070 | 60.1  | 2 | 2 | 2 | 2 | 2 | 2 | 2 |  |
| AZ 28-700  | 700 | 461 | 13.2 | 13.2 | 200 | 110.0 | 157 | 63620  | 2760 | 1635 | 3273 | 64.2  | 2 | 2 | 2 | 2 | 2 | 2 | 2 |  |
| AZ 24-700N | 700 | 459 | 12.5 | 9.0  | 163 | 89.7  | 128 | 55890  | 2435 | 1405 | 2810 | 52.4  | 2 | 2 | 2 | 2 | 2 | 2 | 2 |  |
| AZ 26-700N | 700 | 460 | 13.5 | 10.0 | 176 | 96.9  | 138 | 59790  | 2600 | 1510 | 3015 | 56.6  | 2 | 2 | 2 | 2 | 2 | 2 | 2 |  |
| AZ 28-700N | 700 | 461 | 14.5 | 11.0 | 189 | 104.1 | 149 | 63700  | 2765 | 1610 | 3220 | 60.8  | 2 | 2 | 2 | 2 | 2 | 2 | 2 |  |
| AZ 36-700N | 700 | 499 | 15.0 | 11.2 | 216 | 118.6 | 169 | 89610  | 3590 | 2055 | 4110 | 69.1  | 2 | 2 | 2 | 2 | 2 | 2 | 2 |  |
| AZ 38-700N | 700 | 500 | 16.0 | 12.2 | 230 | 126.4 | 181 | 94840  | 3795 | 2180 | 4360 | 74.0  | 2 | 2 | 2 | 2 | 2 | 2 | 2 |  |
| AZ 40-700N | 700 | 501 | 17.0 | 13.2 | 244 | 134.2 | 192 | 100080 | 3995 | 2305 | 4605 | 78.5  | 2 | 2 | 2 | 2 | 2 | 2 | 2 |  |
| AZ 42-700N | 700 | 499 | 18.0 | 14.0 | 259 | 142.1 | 203 | 104930 | 4205 | 2425 | 4855 | 83.0  | 2 | 2 | 2 | 2 | 2 | 2 | 2 |  |
| AZ 44-700N | 700 | 500 | 19.0 | 15.0 | 273 | 149.9 | 214 | 110150 | 4405 | 2550 | 5105 | 87.5  | 2 | 2 | 2 | 2 | 2 | 2 | 2 |  |
| AZ 46-700N | 700 | 501 | 20.0 | 16.0 | 287 | 157.7 | 225 | 115370 | 4605 | 2675 | 5350 | 92.0  | 2 | 2 | 2 | 2 | 2 | 2 | 2 |  |
| AZ 48-700  | 700 | 503 | 22.0 | 15.0 | 288 | 158.5 | 226 | 119650 | 4755 | 2745 | 5490 | 92.4  | 2 | 2 | 2 | 2 | 2 | 2 | 2 |  |
| AZ 50-700  | 700 | 504 | 23.0 | 16.0 | 303 | 166.3 | 238 | 124890 | 4955 | 2870 | 5735 | 97.3  | 2 | 2 | 2 | 2 | 2 | 2 | 2 |  |
| AZ 52-700  | 700 | 505 | 24.0 | 17.0 | 317 | 174.1 | 249 | 130140 | 5155 | 2990 | 5985 | 101.8 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |  |

### AZ<sup>®</sup>

|                     |     |     |      |      |     |      |     |       |      |      |      |      |   |   |   |   |   |   |   |  |
|---------------------|-----|-----|------|------|-----|------|-----|-------|------|------|------|------|---|---|---|---|---|---|---|--|
| AZ 18 <sup>4)</sup> | 630 | 380 | 9.5  | 9.5  | 150 | 74.4 | 118 | 34200 | 1800 | 1050 | 2104 | 48.3 | 2 | 2 | 2 | 3 | 3 | 3 | 3 |  |
| AZ 18-10/10         | 630 | 381 | 10.0 | 10.0 | 157 | 77.8 | 123 | 35540 | 1870 | 1095 | 2189 | 50.3 | 2 | 2 | 2 | 2 | 3 | 3 | 3 |  |
| AZ 26 <sup>4)</sup> | 630 | 427 | 13.0 | 12.2 | 198 | 97.8 | 155 | 55510 | 2600 | 1530 | 3059 | 63.4 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |  |

<sup>1)</sup> Global Warming Potential data according to the EPD for the *EcosheetPile™ Plus* product range from EPD International AB (S-P-11071). GWP values may differ according to local EPD regulations. Consult page 61 for more details.











<sup>2)</sup> Classification according to EN 1993-5:2007. Class 1 is obtained by verification of the rotation capacity for a class-2 cross-section.

<sup>3)</sup> Available upon request.

<sup>4)</sup> Can be rolled-up or down by 0.5 mm and 1.0 mm on request.

To optimise the design of a steel sheet pile wall according to EN 1993-5:2007, use our free software *Durability* or contact our technical department. Tailor made profiles can be rolled on request.



| Section              | S = Single pile<br>D = Double pile                                                  | Sectional<br>area | Mass  | Moment<br>of inertia | Elastic<br>section<br>modulus | Radius of<br>gyration | Coating<br>area <sup>1)</sup> |      |
|----------------------|-------------------------------------------------------------------------------------|-------------------|-------|----------------------|-------------------------------|-----------------------|-------------------------------|------|
|                      |                                                                                     | cm <sup>2</sup>   | kg/m  | cm <sup>4</sup>      | cm <sup>3</sup>               | cm                    | m <sup>2</sup> /m             |      |
| AZ <sup>®</sup> -800 |                                                                                     |                   |       |                      |                               |                       |                               |      |
| AZ 18-800            |    | Per S             | 102.9 | <b>80.7</b>          | 33055                         | <b>1470</b>           | 17.93                         | 1.04 |
|                      |                                                                                     | Per D             | 205.7 | <b>161.5</b>         | 66110                         | <b>2945</b>           | 17.93                         | 2.08 |
|                      |                                                                                     | Per m of wall     | 128.6 | <b>100.9</b>         | 41320                         | <b>1840</b>           | 17.93                         | 1.30 |
| AZ 19-800            |    | Per S             | 107.7 | <b>84.5</b>          | 34520                         | <b>1510</b>           | 17.90                         | 1.04 |
|                      |                                                                                     | Per D             | 215.4 | <b>169.1</b>         | 69080                         | <b>3075</b>           | 17.90                         | 2.08 |
|                      |                                                                                     | Per m of wall     | 134.6 | <b>105.7</b>         | 43170                         | <b>1920</b>           | 17.90                         | 1.30 |
| AZ 20-800            |    | Per S             | 112.8 | <b>88.6</b>          | 36040                         | <b>1600</b>           | 17.87                         | 1.04 |
|                      |                                                                                     | Per D             | 225.6 | <b>177.1</b>         | 72070                         | <b>3205</b>           | 17.87                         | 2.08 |
|                      |                                                                                     | Per m of wall     | 141.0 | <b>110.7</b>         | 45050                         | <b>2000</b>           | 17.87                         | 1.30 |
| AZ 22-800            |   | Per S             | 122.8 | <b>96.4</b>          | 39035                         | <b>1730</b>           | 17.83                         | 1.04 |
|                      |                                                                                     | Per D             | 245.6 | <b>192.8</b>         | 78070                         | <b>3460</b>           | 17.83                         | 2.08 |
|                      |                                                                                     | Per m of wall     | 153.5 | <b>120.5</b>         | 48790                         | <b>2165</b>           | 17.83                         | 1.30 |
| AZ 23-800            |                                                                                     |                   |       |                      |                               |                       |                               |      |
| AZ 23-800            |  | Per S             | 120.5 | <b>94.6</b>          | 44200                         | <b>1865</b>           | 19.15                         | 1.06 |
|                      |                                                                                     | Per D             | 241.0 | <b>189.2</b>         | 88410                         | <b>3730</b>           | 19.15                         | 2.11 |
|                      |                                                                                     | Per m of wall     | 150.6 | <b>118.2</b>         | 55260                         | <b>2330</b>           | 19.15                         | 1.32 |
| AZ 25-800            |  | Per S             | 130.6 | <b>102.6</b>         | 47530                         | <b>2000</b>           | 19.07                         | 1.06 |
|                      |                                                                                     | Per D             | 261.3 | <b>205.1</b>         | 95060                         | <b>4005</b>           | 19.07                         | 2.11 |
|                      |                                                                                     | Per m of wall     | 163.3 | <b>128.2</b>         | 59410                         | <b>2500</b>           | 19.07                         | 1.32 |
| AZ 27-800            |  | Per S             | 140.8 | <b>110.5</b>         | 50860                         | <b>2135</b>           | 19.01                         | 1.06 |
|                      |                                                                                     | Per D             | 281.6 | <b>221.0</b>         | 101720                        | <b>4275</b>           | 19.01                         | 2.11 |
|                      |                                                                                     | Per m of wall     | 176.0 | <b>138.1</b>         | 63570                         | <b>2670</b>           | 19.01                         | 1.32 |
| AZ <sup>®</sup> -750 |                                                                                     |                   |       |                      |                               |                       |                               |      |
| AZ 28-750            |  | Per S             | 128.4 | <b>100.8</b>         | 53650                         | <b>2110</b>           | 20.44                         | 1.06 |
|                      |                                                                                     | Per D             | 256.8 | <b>201.6</b>         | 107310                        | <b>4215</b>           | 20.44                         | 2.11 |
|                      |                                                                                     | Per m of wall     | 171.2 | <b>134.4</b>         | 71540                         | <b>2810</b>           | 20.44                         | 1.41 |
| AZ 30-750            |  | Per S             | 138.5 | <b>108.8</b>         | 57500                         | <b>2255</b>           | 20.37                         | 1.06 |
|                      |                                                                                     | Per D             | 277.1 | <b>217.5</b>         | 115000                        | <b>4510</b>           | 20.37                         | 2.11 |
|                      |                                                                                     | Per m of wall     | 184.7 | <b>145.0</b>         | 76670                         | <b>3005</b>           | 20.37                         | 1.41 |
| AZ 32-750            |  | Per S             | 148.7 | <b>116.7</b>         | 61350                         | <b>2400</b>           | 20.31                         | 1.06 |
|                      |                                                                                     | Per D             | 297.4 | <b>233.5</b>         | 122710                        | <b>4805</b>           | 20.31                         | 2.11 |
|                      |                                                                                     | Per m of wall     | 198.3 | <b>155.6</b>         | 81800                         | <b>3200</b>           | 20.31                         | 1.41 |

<sup>1)</sup> One side, excluding inside of interlocks.



Section

S = Single pile  
D = Double pileSectional  
area


Mass

Moment  
of inertiaElastic  
section  
modulusRadius of  
gyrationCoating  
area<sup>1)</sup>cm<sup>2</sup>


kg/m

cm<sup>4</sup>cm<sup>3</sup>


cm

m<sup>2</sup>/m**AZ<sup>®</sup>-700 and AZ<sup>®</sup>-770****AZ 12-770**


|               |       |              |       |             |       |      |
|---------------|-------|--------------|-------|-------------|-------|------|
| Per S         | 92.5  | <b>72.6</b>  | 16500 | <b>960</b>  | 13.36 | 0.93 |
| Per D         | 185.0 | <b>145.2</b> | 33000 | <b>1920</b> | 13.36 | 1.85 |
| Per m of wall | 120.1 | <b>94.3</b>  | 21430 | <b>1245</b> | 13.36 | 1.20 |

**AZ 13-770**


|               |       |              |       |             |       |      |
|---------------|-------|--------------|-------|-------------|-------|------|
| Per S         | 96.9  | <b>76.1</b>  | 17220 | <b>1000</b> | 13.33 | 0.93 |
| Per D         | 193.8 | <b>152.1</b> | 34440 | <b>2000</b> | 13.33 | 1.85 |
| Per m of wall | 125.8 | <b>98.8</b>  | 22360 | <b>1300</b> | 13.33 | 1.20 |

**AZ 14-770**


|               |       |              |       |             |       |      |
|---------------|-------|--------------|-------|-------------|-------|------|
| Per S         | 101.3 | <b>79.5</b>  | 17940 | <b>1040</b> | 13.31 | 0.93 |
| Per D         | 202.6 | <b>159.0</b> | 35890 | <b>2085</b> | 13.31 | 1.85 |
| Per m of wall | 131.5 | <b>103.2</b> | 23300 | <b>1355</b> | 13.31 | 1.20 |

**AZ 14-770-10/10**


|               |       |              |       |             |       |      |
|---------------|-------|--------------|-------|-------------|-------|------|
| Per S         | 105.6 | <b>82.9</b>  | 18670 | <b>1085</b> | 13.30 | 0.93 |
| Per D         | 211.2 | <b>165.8</b> | 37330 | <b>2165</b> | 13.30 | 1.85 |
| Per m of wall | 137.2 | <b>107.7</b> | 24240 | <b>1405</b> | 13.30 | 1.20 |

**AZ 12-700**


|               |       |              |       |             |       |      |
|---------------|-------|--------------|-------|-------------|-------|------|
| Per S         | 86.2  | <b>67.7</b>  | 13220 | <b>840</b>  | 12.38 | 0.86 |
| Per D         | 172.5 | <b>135.4</b> | 26440 | <b>1685</b> | 12.38 | 1.71 |
| Per m of wall | 123.2 | <b>96.7</b>  | 18880 | <b>1205</b> | 12.38 | 1.22 |

**AZ 13-700**


|               |       |              |       |             |       |      |
|---------------|-------|--------------|-------|-------------|-------|------|
| Per S         | 94.3  | <b>74.0</b>  | 14370 | <b>910</b>  | 12.35 | 0.86 |
| Per D         | 188.5 | <b>148.0</b> | 28750 | <b>1825</b> | 12.35 | 1.71 |
| Per m of wall | 134.7 | <b>105.7</b> | 20540 | <b>1305</b> | 12.35 | 1.22 |











**AZ 13-700-10/10**

|               |       |              |       |             |       |      |
|---------------|-------|--------------|-------|-------------|-------|------|
| Per S         | 98.3  | <b>77.2</b>  | 14960 | <b>945</b>  | 12.33 | 0.86 |
| Per D         | 196.6 | <b>154.3</b> | 29910 | <b>1895</b> | 12.33 | 1.71 |
| Per m of wall | 140.4 | <b>110.2</b> | 21370 | <b>1355</b> | 12.33 | 1.22 |

**AZ 14-700**

|               |       |              |       |             |       |      |
|---------------|-------|--------------|-------|-------------|-------|------|
| Per S         | 102.3 | <b>80.3</b>  | 15530 | <b>980</b>  | 12.32 | 0.86 |
| Per D         | 204.6 | <b>160.6</b> | 31060 | <b>1965</b> | 12.32 | 1.71 |
| Per m of wall | 146.1 | <b>114.7</b> | 22190 | <b>1405</b> | 12.32 | 1.22 |
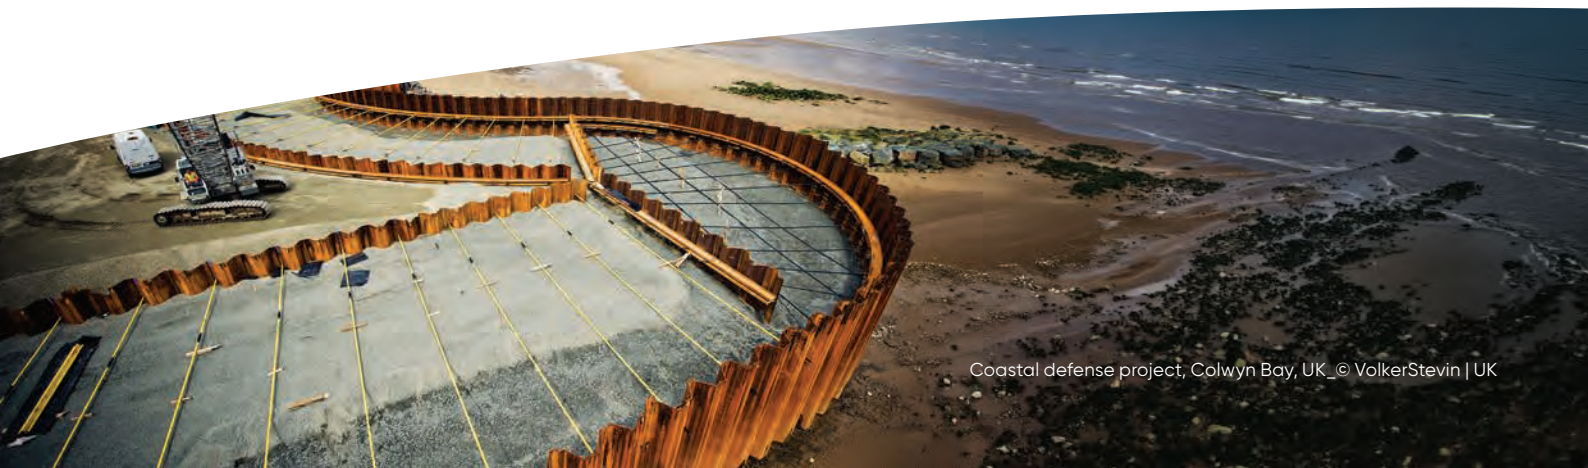
<sup>1)</sup> One side, excluding inside of interlocks.

| Section                                       |                                                                                     | S = Single pile<br>D = Double pile | Sectional<br>area | Mass  | Moment<br>of inertia | Elastic<br>section<br>modulus | Radius of<br>gyration | Coating<br>area <sup>1)</sup> |
|-----------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------|-------------------|-------|----------------------|-------------------------------|-----------------------|-------------------------------|
|                                               |                                                                                     |                                    | cm <sup>2</sup>   | kg/m  | cm <sup>4</sup>      | cm <sup>3</sup>               | cm                    | m <sup>2</sup> /m             |
| AZ <sup>®</sup> -700 and AZ <sup>®</sup> -770 |                                                                                     |                                    |                   |       |                      |                               |                       |                               |
| AZ 17-700                                     |    | Per S                              | 93.1              | 73.1  | 25360                | 1210                          | 16.50                 | 0.93                          |
|                                               |                                                                                     | Per D                              | 186.2             | 146.2 | 50720                | 2420                          | 16.50                 | 1.86                          |
|                                               |                                                                                     | Per m of wall                      | 133.0             | 104.4 | 36230                | 1730                          | 16.50                 | 1.33                          |
| AZ 18-700                                     |    | Per S                              | 97.5              | 76.5  | 26460                | 1260                          | 16.47                 | 0.93                          |
|                                               |                                                                                     | Per D                              | 194.9             | 153.0 | 52920                | 2520                          | 16.47                 | 1.86                          |
|                                               |                                                                                     | Per m of wall                      | 139.2             | 109.3 | 37800                | 1800                          | 16.47                 | 1.33                          |
| AZ 19-700                                     |    | Per S                              | 101.9             | 80.0  | 27560                | 1310                          | 16.44                 | 0.93                          |
|                                               |                                                                                     | Per D                              | 203.8             | 160.0 | 55130                | 2620                          | 16.44                 | 1.86                          |
|                                               |                                                                                     | Per m of wall                      | 145.6             | 114.3 | 39380                | 1870                          | 16.44                 | 1.33                          |
| AZ 20-700                                     |   | Per S                              | 106.4             | 83.5  | 28670                | 1360                          | 16.42                 | 0.93                          |
|                                               |                                                                                     | Per D                              | 212.8             | 167.0 | 57340                | 2725                          | 16.42                 | 1.86                          |
|                                               |                                                                                     | Per m of wall                      | 152.0             | 119.3 | 40960                | 1945                          | 16.42                 | 1.33                          |
|                                               |                                                                                     |                                    |                   |       |                      |                               |                       |                               |
| AZ 24-700                                     |  | Per S                              | 121.9             | 95.7  | 39080                | 1700                          | 17.90                 | 0.97                          |
|                                               |                                                                                     | Per D                              | 243.8             | 191.4 | 78150                | 3405                          | 17.90                 | 1.93                          |
|                                               |                                                                                     | Per m of wall                      | 174.1             | 136.7 | 55820                | 2430                          | 17.90                 | 1.38                          |
| AZ 26-700                                     |  | Per S                              | 131.0             | 102.9 | 41800                | 1815                          | 17.86                 | 0.97                          |
|                                               |                                                                                     | Per D                              | 262.1             | 205.7 | 83610                | 3635                          | 17.86                 | 1.93                          |
|                                               |                                                                                     | Per m of wall                      | 187.2             | 146.9 | 59720                | 2600                          | 17.86                 | 1.38                          |
| AZ 28-700                                     |  | Per S                              | 140.2             | 110.0 | 44530                | 1930                          | 17.83                 | 0.97                          |
|                                               |                                                                                     | Per D                              | 280.3             | 220.1 | 89070                | 3865                          | 17.83                 | 1.93                          |
|                                               |                                                                                     | Per m of wall                      | 200.2             | 157.2 | 63620                | 2760                          | 17.83                 | 1.38                          |
|                                               |                                                                                     |                                    |                   |       |                      |                               |                       |                               |
| AZ 24-700N                                    |  | Per S                              | 114.3             | 89.7  | 39120                | 1705                          | 18.50                 | 0.96                          |
|                                               |                                                                                     | Per D                              | 228.6             | 179.5 | 78240                | 3410                          | 18.50                 | 1.92                          |
|                                               |                                                                                     | Per m of wall                      | 163.3             | 128.2 | 55890                | 2435                          | 18.50                 | 1.37                          |
| AZ 26-700N                                    |  | Per S                              | 123.5             | 96.9  | 41850                | 1820                          | 18.41                 | 0.96                          |
|                                               |                                                                                     | Per D                              | 247.0             | 193.9 | 83710                | 3640                          | 18.41                 | 1.92                          |
|                                               |                                                                                     | Per m of wall                      | 176.4             | 138.5 | 59790                | 2600                          | 18.41                 | 1.37                          |
| AZ 28-700N                                    |  | Per S                              | 132.6             | 104.1 | 44590                | 1935                          | 18.33                 | 0.96                          |
|                                               |                                                                                     | Per D                              | 265.3             | 208.2 | 89170                | 3870                          | 18.33                 | 1.92                          |
|                                               |                                                                                     | Per m of wall                      | 189.5             | 148.7 | 63700                | 2765                          | 18.33                 | 1.37                          |

<sup>1)</sup> One side, excluding inside of interlocks.



Section

S = Single pile  
D = Double pileSectional  
area


Mass

Moment  
of inertiaElastic  
section  
modulusRadius of  
gyrationCoating  
area<sup>1)</sup>cm<sup>2</sup>


kg/m

cm<sup>4</sup>cm<sup>3</sup>


cm

m<sup>2</sup>/m**AZ<sup>®</sup>-700 and AZ<sup>®</sup>-770****AZ 36-700N**


|               |       |              |        |             |       |      |
|---------------|-------|--------------|--------|-------------|-------|------|
| Per S         | 151.1 | <b>118.6</b> | 62730  | <b>2510</b> | 20.37 | 1.03 |
| Per D         | 302.2 | <b>237.3</b> | 125450 | <b>5030</b> | 20.37 | 2.05 |
| Per m of wall | 215.9 | <b>169.5</b> | 89610  | <b>3590</b> | 20.37 | 1.47 |

**AZ 38-700N**


|               |       |              |        |             |       |      |
|---------------|-------|--------------|--------|-------------|-------|------|
| Per S         | 161.0 | <b>126.4</b> | 66390  | <b>2655</b> | 20.31 | 1.03 |
| Per D         | 322.0 | <b>252.8</b> | 132780 | <b>5310</b> | 20.31 | 2.05 |
| Per m of wall | 230.0 | <b>180.6</b> | 94840  | <b>3795</b> | 20.31 | 1.47 |

**AZ 40-700N**


|               |       |              |        |             |       |      |
|---------------|-------|--------------|--------|-------------|-------|------|
| Per S         | 170.9 | <b>134.2</b> | 70060  | <b>2795</b> | 20.25 | 1.03 |
| Per D         | 341.9 | <b>268.4</b> | 140110 | <b>5595</b> | 20.25 | 2.05 |
| Per m of wall | 244.2 | <b>191.7</b> | 100080 | <b>3995</b> | 20.25 | 1.47 |

**AZ 42-700N**


|               |       |              |        |             |       |      |
|---------------|-------|--------------|--------|-------------|-------|------|
| Per S         | 181.1 | <b>142.1</b> | 73450  | <b>2945</b> | 20.14 | 1.03 |
| Per D         | 362.1 | <b>284.3</b> | 146900 | <b>5890</b> | 20.14 | 2.06 |
| Per m of wall | 258.7 | <b>203.1</b> | 104930 | <b>4205</b> | 20.14 | 1.47 |

**AZ 44-700N**


|               |       |              |        |             |       |      |
|---------------|-------|--------------|--------|-------------|-------|------|
| Per S         | 191.0 | <b>149.9</b> | 77100  | <b>3085</b> | 20.09 | 1.03 |
| Per D         | 382.0 | <b>299.8</b> | 154210 | <b>6170</b> | 20.09 | 2.06 |
| Per m of wall | 272.8 | <b>214.2</b> | 110150 | <b>4405</b> | 20.09 | 1.47 |

**AZ 46-700N**


|               |       |              |        |             |       |      |
|---------------|-------|--------------|--------|-------------|-------|------|
| Per S         | 200.9 | <b>157.7</b> | 80760  | <b>3220</b> | 20.05 | 1.03 |
| Per D         | 401.8 | <b>315.4</b> | 161520 | <b>6450</b> | 20.05 | 2.06 |
| Per m of wall | 287.0 | <b>225.3</b> | 115370 | <b>4605</b> | 20.05 | 1.47 |

**AZ 48-700**

|               |       |              |        |             |       |      |
|---------------|-------|--------------|--------|-------------|-------|------|
| Per S         | 201.9 | <b>158.5</b> | 83760  | <b>3330</b> | 20.37 | 1.02 |
| Per D         | 403.8 | <b>317.0</b> | 167510 | <b>6660</b> | 20.37 | 2.04 |
| Per m of wall | 288.4 | <b>226.4</b> | 119650 | <b>4755</b> | 20.37 | 1.46 |

**AZ 50-700**

|               |       |              |        |             |       |      |
|---------------|-------|--------------|--------|-------------|-------|------|
| Per S         | 211.8 | <b>166.3</b> | 87430  | <b>3470</b> | 20.32 | 1.02 |
| Per D         | 423.6 | <b>332.5</b> | 174850 | <b>6940</b> | 20.32 | 2.04 |
| Per m of wall | 302.6 | <b>237.5</b> | 124890 | <b>4955</b> | 20.32 | 1.46 |

**AZ 52-700**

|               |       |              |        |             |       |      |
|---------------|-------|--------------|--------|-------------|-------|------|
| Per S         | 221.7 | <b>174.1</b> | 91100  | <b>3610</b> | 20.27 | 1.02 |
| Per D         | 443.5 | <b>348.1</b> | 182200 | <b>7215</b> | 20.27 | 2.04 |
| Per m of wall | 316.8 | <b>248.7</b> | 130140 | <b>5155</b> | 20.27 | 1.46 |

<sup>1)</sup> One side, excluding inside of interlocks.

Section

S = Single pile  
D = Double pile

Sectional  
area

Mass

Moment  
of inertia

Elastic  
section  
modulus

Radius of  
gyration

Coating  
area<sup>1)</sup>

cm<sup>2</sup>

kg/m

cm<sup>4</sup>


cm<sup>3</sup>

cm

m<sup>2</sup>/m

AZ<sup>®</sup>

AZ 18



Per S

94.8

74.4

21540

1135

15.07

0.86

Per D

189.6

148.8

43080

2270

15.07

1.71

Per m of wall

150.4

118.1


34200

1800

15.07

1.35

AZ 18-10/10



Per S

99.1

77.8

22390

1175

15.04

0.86

Per D

198.1

155.5

44790

2355

15.04

1.71

Per m of wall

157.2

123.4


35540

1870

15.04

1.35

AZ 26



Per S

124.6

97.8

34970

1640

16.75

0.90

Per D

249.2

195.6

69940

3280

16.75

1.78

Per m of wall

197.8

155.2

55510

2600

16.75

1.41

<sup>1)</sup> One side, excluding inside of interlocks.


Boardwalk, Aarschot, Belgium




## Interlock



AZ® Larssen interlock in accordance with EN 10248.


All available AZ® sheet piles can be interlocked, as well as the AU™, PU® and GU® (except GU-400).

Theoretical interlock swing:  $\alpha_{\max} = 5^\circ$

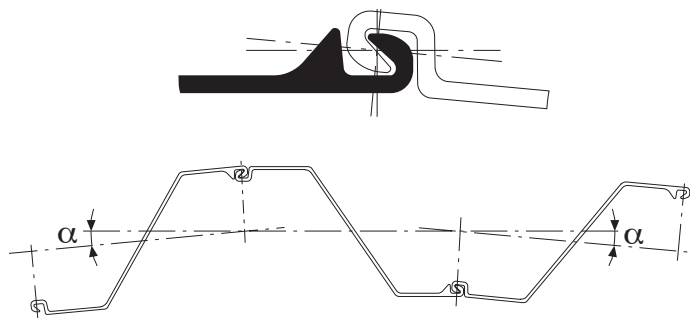

## Delivery form

### Single Pile Position A

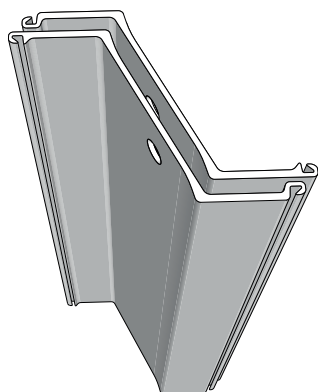


A single pile **Pos A** can be leaned against the letter "A".



### Single Pile Position B


A single pile **Pos B** can be leaned against the letter "B".

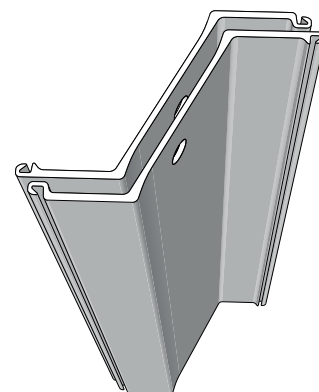

### Double Pile Form I (standard)




Straight interlock is on the right at top of pile when facing as below.

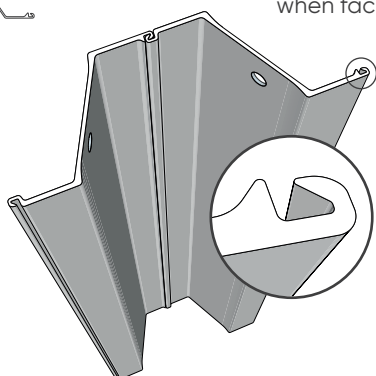



### Double Pile Form II (on request)

Straight interlock is on the left at top of pile when facing as below.

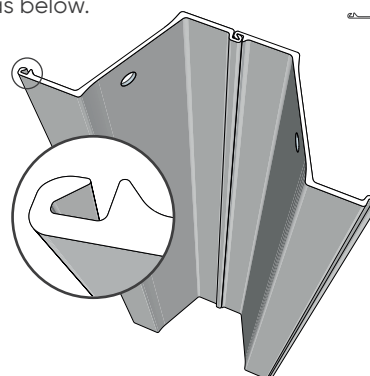


## Bent piles

Maximum bending angle:  $\beta = 25^\circ$ . Z-piles are usually bent in the middle of the web. They are generally delivered as single piles. Double piles are available upon request.



## Corner sections

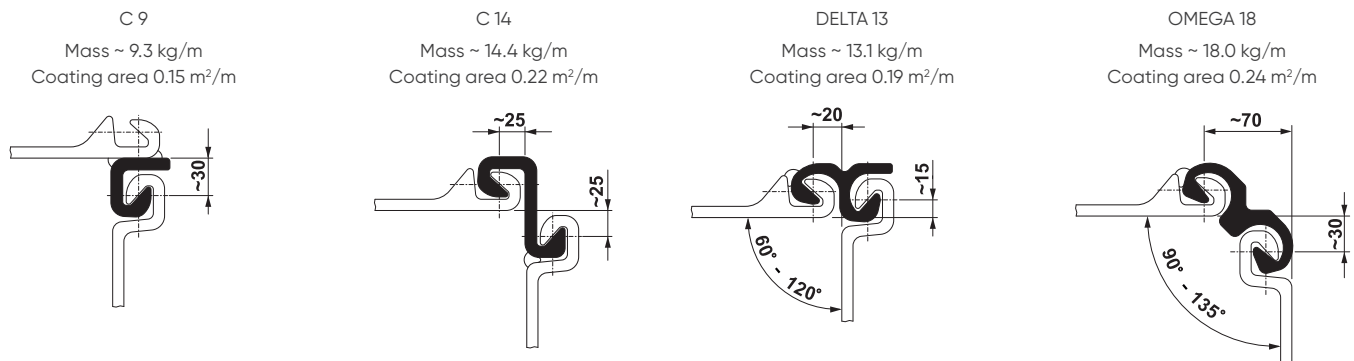


Special corner sections interlocking with U and Z-sections make it possible to form corner or junction piles without using fabricated special piles. Corner sections are fixed to the sheet pile in accordance with EN 12063.

Different welding specifications are available on request. The corner sections are threaded and welded with usually a 200 mm setback from the top of the piles.

## Corner and junction piles

The following special piles, among others, are available as single and double piles on request.

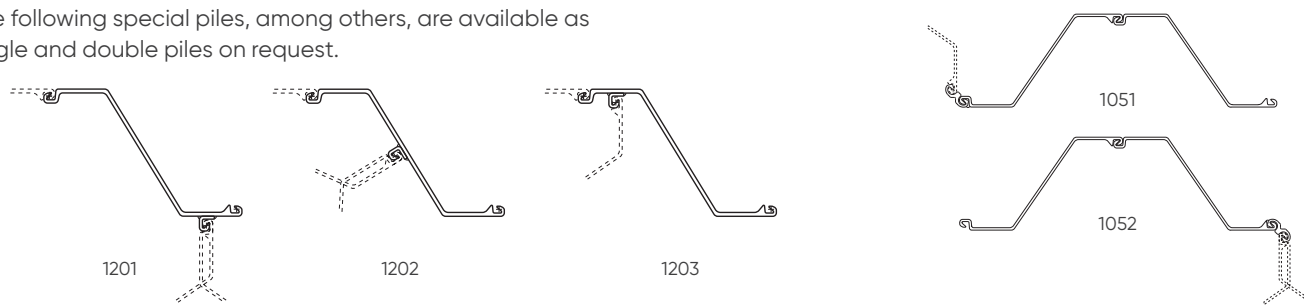




## Crimping

Threaded AZ® double piles are recommended for facilitating the installation process. Although crimping of AZ double piles is not required

for structural design reasons, most customers request crimping according to our standard specification for handling and driving.

### Standard crimping pattern<sup>1)</sup>

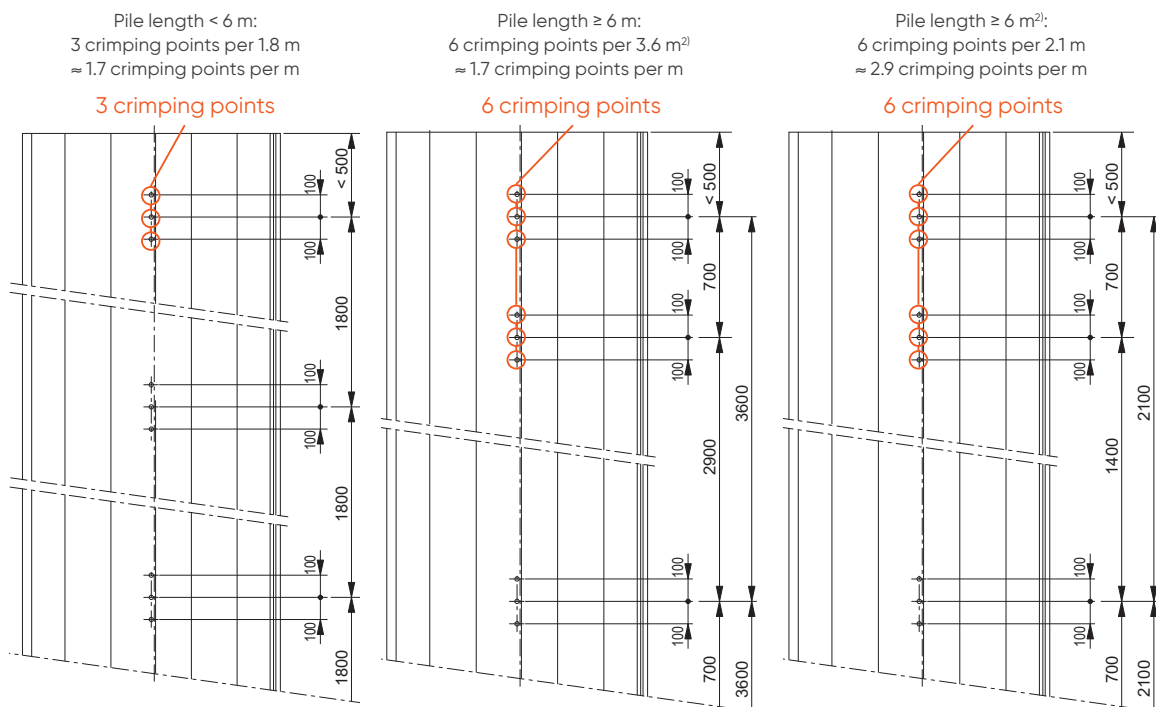


<sup>1)</sup> Amount and layout of crimping points may differ at both ends. Special crimping on request.

<sup>2)</sup> For the profiles AZ 38-700N, AZ 44-700N and AZ 50-700 as well as their derivatives.

## Tie back system

Most sheet pile retaining walls need supplementary support at the top, in addition to embedment in the soil. Temporary cofferdams generally use waler and strut bracing inside the excavation. Permanent or large retaining walls are often tied back to an anchor wall installed at a certain distance behind the main wall. Other anchor systems, like injection anchors or anchor piles are also common practice. The drawing shows a typical horizontal tie-rod connection for sheet pile walls.

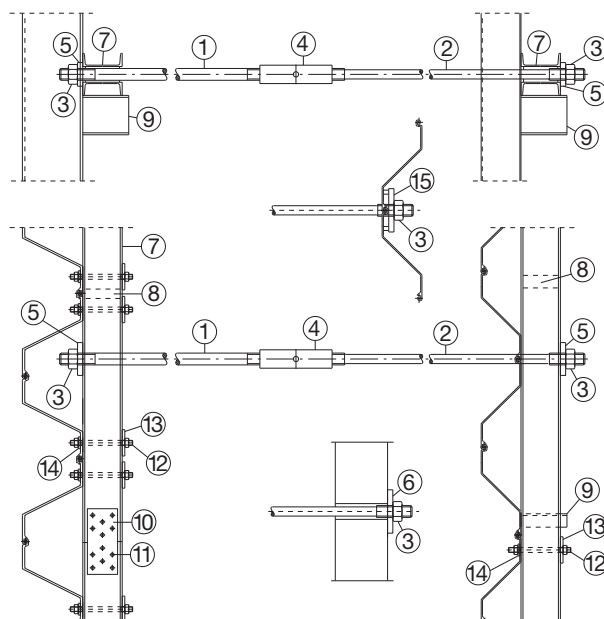

The following components can be seen:


- |                     |                             |                  |
|---------------------|-----------------------------|------------------|
| ① Plain tie-rod     | ⑥ Bearing plate on concrete | ⑩ Splicing plate |
| ② Upset end tie-rod | ⑦ Waling                    | ⑪ Splicing bolt  |
| ③ Nut               | ⑧ Spacer                    | ⑫ Fixing bolt    |
| ④ Turnbuckle        | ⑨ Supporting bracket        | ⑬                |
| ⑤ Bearing plate     |                             | ⑭ Fixing plate   |
|                     |                             | ⑮                |



# U-Sections

The advantages of U-sections include:

- a wide range of sections forming several series with various geometrical characteristics, allowing a technically and economically optimal choice for each specific project;
- the combination of great profile depth with large flange thickness giving excellent mechanical properties;
- the symmetrical form of the single element has made these sheet piles particularly convenient for re-use;
- the possibility of assembling and crimping the piles into pairs at the mill improves installation quality and performance;
- easy fixing of tie-rods and swivelling attachments, even under water;
- great corrosion resistance, with the steel section being thickest at the critical corrosion points.

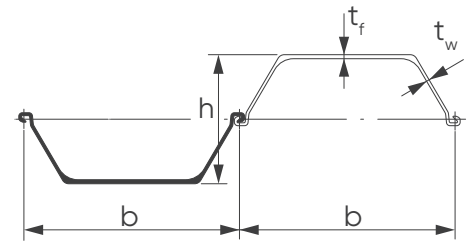

| Section             | Width | Height | Thickness |      | Sectional area | Mass        |      | Moment of inertia | Elastic section modulus | Static moment | Plastic section modulus | Global Warming Potential <sup>1)</sup> | Class <sup>2)</sup> |          |          |          |          |          |          |          |                |                |                    |
|---------------------|-------|--------|-----------|------|----------------|-------------|------|-------------------|-------------------------|---------------|-------------------------|----------------------------------------|---------------------|----------|----------|----------|----------|----------|----------|----------|----------------|----------------|--------------------|
|                     |       |        |           |      |                | single pile | wall |                   |                         |               |                         |                                        | S 240 GP            | S 270 GP | S 320 GP | S 355 GP | S 390 GP | S 430 GP | S 460 GP | S 500 GP |                |                |                    |
|                     |       |        | b         | h    |                |             |      |                   |                         |               |                         |                                        |                     |          |          |          |          |          |          |          | t <sub>f</sub> | t <sub>w</sub> | cm <sup>2</sup> /m |
|                     | mm    | mm     | mm        | mm   |                |             |      |                   |                         |               |                         |                                        |                     |          |          |          |          |          |          |          |                |                |                    |
| AU™ sections        |       |        |           |      |                |             |      |                   |                         |               |                         |                                        |                     |          |          |          |          |          |          |          |                |                |                    |
| AU 14               | 750   | 408    | 10.0      | 8.3  | 132            | 77.9        | 104  | 28680             | 1405                    | 820           | 1663                    | 42.5                                   | 2                   | 2        | 3        | 3        | 3        | 3        | 3        | 3        | 3              | 3              | 3                  |
| AU 16               | 750   | 411    | 11.5      | 9.3  | 147            | 86.3        | 115  | 32850             | 1600                    | 935           | 1891                    | 47.0                                   | 2                   | 2        | 2        | 2        | 2        | 3        | 3        | 3        | 3              | 3              | 3                  |
| AU 18               | 750   | 441    | 10.5      | 9.1  | 150            | 88.5        | 118  | 39300             | 1780                    | 1030          | 2082                    | 48.3                                   | 2                   | 3        | 3        | 3        | 3        | 3        | 3        | 3        | 4              |                |                    |
| AU 20               | 750   | 444    | 12.0      | 10.0 | 165            | 96.9        | 129  | 44440             | 2000                    | 1155          | 2339                    | 52.8                                   | 2                   | 2        | 2        | 3        | 3        | 3        | 3        | 3        | 3              |                |                    |
| AU 23               | 750   | 447    | 13.0      | 9.5  | 173            | 102.1       | 136  | 50700             | 2270                    | 1285          | 2600                    | 55.6                                   | 2                   | 2        | 2        | 3        | 3        | 3        | 3        | 3        | 3              |                |                    |
| AU 25               | 750   | 450    | 14.5      | 10.2 | 188            | 110.4       | 147  | 56240             | 2500                    | 1420          | 2866                    | 60.1                                   | 2                   | 2        | 2        | 2        | 2        | 3        | 3        | 3        |                |                |                    |
| PU® sections        |       |        |           |      |                |             |      |                   |                         |               |                         |                                        |                     |          |          |          |          |          |          |          |                |                |                    |
| PU 12               | 600   | 360    | 9.8       | 9.0  | 140            | 66.1        | 110  | 21600             | 1200                    | 715           | 1457                    | 45.0                                   | -                   | -        | -        | 2        | 2        | 2        | 3        | 3        |                |                |                    |
| PU 12S              | 600   | 360    | 10.0      | 10.0 | 151            | 71.0        | 118  | 22660             | 1260                    | 755           | 1543                    | 48.3                                   | -                   | -        | -        | 2        | 2        | 2        | 2        | 3        |                |                |                    |
| PU 18 <sup>-1</sup> | 600   | 430    | 10.2      | 8.4  | 154            | 72.6        | 121  | 35950             | 1670                    | 980           | 1988                    | 49.5                                   | 2                   | 2        | 2        | 2        | 2        | 3        | 3        | 3        |                |                |                    |
| PU 18               | 600   | 430    | 11.2      | 9.0  | 163            | 76.9        | 128  | 38650             | 1800                    | 1055          | 2134                    | 52.4                                   | 2                   | 2        | 2        | 2        | 2        | 2        | 2        | 3        |                |                |                    |
| PU 18 <sup>-1</sup> | 600   | 430    | 12.2      | 9.5  | 172            | 81.1        | 135  | 41320             | 1920                    | 1125          | 2280                    | 55.2                                   | 2                   | 2        | 2        | 2        | 2        | 2        | 2        | 2        |                |                |                    |
| PU 22 <sup>-1</sup> | 600   | 450    | 11.1      | 9.0  | 174            | 81.9        | 137  | 46380             | 2060                    | 1195          | 2422                    | 56.0                                   | 2                   | 2        | 2        | 2        | 2        | 3        | 3        | 3        |                |                |                    |
| PU 22               | 600   | 450    | 12.1      | 9.5  | 183            | 86.1        | 144  | 49460             | 2200                    | 1275          | 2580                    | 58.9                                   | 2                   | 2        | 2        | 2        | 2        | 2        | 2        | 3        |                |                |                    |
| PU 22 <sup>-1</sup> | 600   | 450    | 13.1      | 10.0 | 192            | 90.4        | 151  | 52510             | 2335                    | 1355          | 2735                    | 61.8                                   | 2                   | 2        | 2        | 2        | 2        | 2        | 2        | 2        |                |                |                    |
| PU 28 <sup>-1</sup> | 600   | 452    | 14.2      | 9.7  | 207            | 97.4        | 162  | 60580             | 2680                    | 1525          | 3087                    | 66.3                                   | 2                   | 2        | 2        | 2        | 2        | 2        | 2        | 2        |                |                |                    |
| PU 28               | 600   | 454    | 15.2      | 10.1 | 216            | 101.8       | 170  | 64460             | 2840                    | 1620          | 3269                    | 69.5                                   | 2                   | 2        | 2        | 2        | 2        | 2        | 2        | 2        |                |                |                    |
| PU 28 <sup>-1</sup> | 600   | 456    | 16.2      | 10.5 | 226            | 106.2       | 177  | 68380             | 3000                    | 1710          | 3450                    | 72.4                                   | 2                   | 2        | 2        | 2        | 2        | 2        | 2        | 2        |                |                |                    |
| PU 32 <sup>-1</sup> | 600   | 452    | 18.5      | 10.6 | 233            | 109.9       | 183  | 69210             | 3065                    | 1745          | 3525                    | 74.8                                   | 2                   | 2        | 2        | 2        | 2        | 2        | 2        | 2        |                |                |                    |
| PU 32               | 600   | 452    | 19.5      | 11.0 | 242            | 114.1       | 190  | 72320             | 3200                    | 1825          | 3687                    | 77.7                                   | 2                   | 2        | 2        | 2        | 2        | 2        | 2        | 2        |                |                |                    |
| PU 32 <sup>-1</sup> | 600   | 452    | 20.5      | 11.4 | 251            | 118.4       | 197  | 75410             | 3340                    | 1905          | 3845                    | 80.6                                   | 2                   | 2        | 2        | 2        | 2        | 2        | 2        | 2        |                |                |                    |
| GU® sections        |       |        |           |      |                |             |      |                   |                         |               |                         |                                        |                     |          |          |          |          |          |          |          |                |                |                    |
| GU 6N               | 600   | 309    | 6.0       | 6.0  | 89             | 41.9        | 70   | 9670              | 625                     | 375           | 765                     | -                                      | 3                   | 3        | 3        | 4        | 4        | 4        | 4        | -        |                |                |                    |
| GU 7N               | 600   | 310    | 6.5       | 6.4  | 94             | 44.1        | 74   | 10450             | 675                     | 400           | 825                     | -                                      | 3                   | 3        | 3        | 3        | 3        | 4        | 4        | -        |                |                |                    |
| GU 7S               | 600   | 311    | 7.2       | 6.9  | 98             | 46.3        | 77   | 11540             | 740                     | 440           | 900                     | -                                      | 2                   | 2        | 3        | 3        | 3        | 3        | 3        | -        |                |                |                    |
| GU 7HWS             | 600   | 312    | 7.3       | 6.9  | 101            | 47.4        | 79   | 11620             | 745                     | 445           | 910                     | -                                      | 2                   | 2        | 3        | 3        | 3        | 3        | 3        | -        |                |                |                    |
| GU 8N               | 600   | 312    | 7.5       | 7.1  | 103            | 48.5        | 81   | 12010             | 770                     | 460           | 935                     | -                                      | 2                   | 2        | 3        | 3        | 3        | 3        | 3        | -        |                |                |                    |
| GU 8S               | 600   | 313    | 8.0       | 7.5  | 108            | 50.8        | 85   | 12800             | 820                     | 490           | 995                     | -                                      | 2                   | 2        | 2        | 3        | 3        | 3        | 3        | -        |                |                |                    |



| Section                  | Width | Height | Thickness |      | Sectional area | Mass           |                | Moment of inertia | Elastic section modulus | Static moment | Plastic section modulus | Global Warming Potential <sup>1)</sup> | Class <sup>2)</sup> |             |      |      |                   |                    |                    |                    |                    |             |                                     |          |          |          |          |          |          |          |          |
|--------------------------|-------|--------|-----------|------|----------------|----------------|----------------|-------------------|-------------------------|---------------|-------------------------|----------------------------------------|---------------------|-------------|------|------|-------------------|--------------------|--------------------|--------------------|--------------------|-------------|-------------------------------------|----------|----------|----------|----------|----------|----------|----------|----------|
|                          |       |        | b         | h    |                | t <sub>f</sub> | t <sub>w</sub> |                   |                         |               |                         |                                        | cm <sup>2</sup> /m  | single pile | wall | kg/m | kg/m <sup>2</sup> | cm <sup>4</sup> /m | cm <sup>3</sup> /m | cm <sup>3</sup> /m | cm <sup>3</sup> /m | GWP (A1-A3) | kg CO <sub>2</sub> e/m <sup>2</sup> | S 240 GP | S 270 GP | S 320 GP | S 355 GP | S 390 GP | S 430 GP | S 460 GP | S 500 GP |
|                          |       |        |           |      |                |                |                |                   |                         |               |                         |                                        |                     |             |      |      |                   |                    |                    |                    |                    |             |                                     |          |          |          |          |          |          |          |          |
| GU <sup>®</sup> sections |       |        |           |      |                |                |                |                   |                         |               |                         |                                        |                     |             |      |      |                   |                    |                    |                    |                    |             |                                     |          |          |          |          |          |          |          |          |
| GU 10N                   | 600   | 316    | 9.0       | 6.8  | 118            | 55.8           | 93             | 15700             | 995                     | 565           | 1160                    | -                                      | 2                   | 2           | 3    | 3    | 3                 | 3                  | 3                  | 3                  | -                  |             |                                     |          |          |          |          |          |          |          |          |
| GU 11N                   | 600   | 318    | 10.0      | 7.4  | 128            | 60.2           | 100            | 17450             | 1095                    | 630           | 1280                    | -                                      | 2                   | 2           | 2    | 2    | 3                 | 3                  | 3                  | 3                  | -                  |             |                                     |          |          |          |          |          |          |          |          |
| GU 12N                   | 600   | 320    | 11.0      | 8.0  | 137            | 64.6           | 108            | 19220             | 1200                    | 690           | 1400                    | -                                      | 2                   | 2           | 2    | 2    | 2                 | 2                  | 3                  | 3                  | -                  |             |                                     |          |          |          |          |          |          |          |          |
| GU 13N                   | 600   | 418    | 9.0       | 7.4  | 127            | 59.9           | 100            | 26590             | 1270                    | 755           | 1535                    | -                                      | 2                   | 2           | 2    | 2    | 2                 | 3                  | 3                  | 3                  | -                  |             |                                     |          |          |          |          |          |          |          |          |
| GU 14N                   | 600   | 420    | 10.0      | 8.0  | 136            | 64.3           | 107            | 29410             | 1400                    | 830           | 1685                    | -                                      | 2                   | 2           | 2    | 2    | 2                 | 2                  | 2                  | 2                  | -                  |             |                                     |          |          |          |          |          |          |          |          |
| GU 15N                   | 600   | 422    | 11.0      | 8.6  | 146            | 68.7           | 115            | 32260             | 1530                    | 910           | 1840                    | -                                      | 2                   | 2           | 2    | 2    | 2                 | 2                  | 2                  | 2                  | -                  |             |                                     |          |          |          |          |          |          |          |          |
| GU 16N                   | 600   | 430    | 10.2      | 8.4  | 154            | 72.6           | 121            | 35950             | 1670                    | 980           | 1988                    | -                                      | 2                   | 2           | 2    | 2    | 2                 | 3                  | 3                  | 3                  | -                  |             |                                     |          |          |          |          |          |          |          |          |
| GU 18N                   | 600   | 430    | 11.2      | 9.0  | 163            | 76.9           | 128            | 38650             | 1800                    | 1055          | 2134                    | -                                      | 2                   | 2           | 2    | 2    | 2                 | 2                  | 2                  | 2                  | -                  |             |                                     |          |          |          |          |          |          |          |          |
| GU 20N                   | 600   | 430    | 12.2      | 9.5  | 172            | 81.1           | 135            | 41320             | 1920                    | 1125          | 2280                    | -                                      | 2                   | 2           | 2    | 2    | 2                 | 2                  | 2                  | 2                  | -                  |             |                                     |          |          |          |          |          |          |          |          |
| GU 21N                   | 600   | 450    | 11.1      | 9.0  | 174            | 81.9           | 137            | 46380             | 2060                    | 1195          | 2422                    | -                                      | 2                   | 2           | 2    | 2    | 2                 | 3                  | 3                  | 3                  | -                  |             |                                     |          |          |          |          |          |          |          |          |
| GU 22N                   | 600   | 450    | 12.1      | 9.5  | 183            | 86.1           | 144            | 49460             | 2200                    | 1275          | 2580                    | -                                      | 2                   | 2           | 2    | 2    | 2                 | 2                  | 2                  | 2                  | -                  |             |                                     |          |          |          |          |          |          |          |          |
| GU 23N                   | 600   | 450    | 13.1      | 10.0 | 192            | 90.4           | 151            | 52510             | 2335                    | 1355          | 2735                    | -                                      | 2                   | 2           | 2    | 2    | 2                 | 2                  | 2                  | 2                  | -                  |             |                                     |          |          |          |          |          |          |          |          |
| GU 27N                   | 600   | 452    | 14.2      | 9.7  | 207            | 97.4           | 162            | 60580             | 2680                    | 1525          | 3087                    | -                                      | 2                   | 2           | 2    | 2    | 2                 | 2                  | 2                  | 2                  | -                  |             |                                     |          |          |          |          |          |          |          |          |
| GU 28N                   | 600   | 454    | 15.2      | 10.1 | 216            | 101.8          | 170            | 64460             | 2840                    | 1620          | 3269                    | -                                      | 2                   | 2           | 2    | 2    | 2                 | 2                  | 2                  | 2                  | -                  |             |                                     |          |          |          |          |          |          |          |          |
| GU 30N                   | 600   | 456    | 16.2      | 10.5 | 226            | 106.2          | 177            | 68380             | 3000                    | 1710          | 3450                    | -                                      | 2                   | 2           | 2    | 2    | 2                 | 2                  | 2                  | 2                  | -                  |             |                                     |          |          |          |          |          |          |          |          |
| GU 31N                   | 600   | 452    | 18.5      | 10.6 | 233            | 109.9          | 183            | 69210             | 3065                    | 1745          | 3525                    | -                                      | 2                   | 2           | 2    | 2    | 2                 | 2                  | 2                  | 2                  | -                  |             |                                     |          |          |          |          |          |          |          |          |
| GU 32N                   | 600   | 452    | 19.5      | 11.0 | 242            | 114.1          | 190            | 72320             | 3200                    | 1825          | 3687                    | -                                      | 2                   | 2           | 2    | 2    | 2                 | 2                  | 2                  | 2                  | -                  |             |                                     |          |          |          |          |          |          |          |          |
| GU 33N                   | 600   | 452    | 20.5      | 11.4 | 251            | 118.4          | 197            | 75410             | 3340                    | 1905          | 3845                    | -                                      | 2                   | 2           | 2    | 2    | 2                 | 2                  | 2                  | 2                  | -                  |             |                                     |          |          |          |          |          |          |          |          |
| GU 16-400                | 400   | 290    | 12.7      | 9.4  | 197            | 62.0           | 155            | 22580             | 1560                    | 885           | 1815                    | -                                      | 2                   | 2           | 2    | 2    | 2                 | 2                  | 2                  | -                  | -                  |             |                                     |          |          |          |          |          |          |          |          |
| GU 18-400                | 400   | 292    | 15.0      | 9.7  | 221            | 69.3           | 173            | 26090             | 1785                    | 1015          | 2080                    | -                                      | 2                   | 2           | 2    | 2    | 2                 | 2                  | 2                  | -                  | -                  |             |                                     |          |          |          |          |          |          |          |          |

The moment of inertia and section moduli values given assume correct shear transfer across the interlock.

<sup>1)</sup> Global Warming Potential data according to the EPD for the *EcosheetPile™ Plus* product range from EPD International AB (S-P-11071). GWP values may differ according to local EPD regulations. Consult page 61 for more details.

<sup>2)</sup> Classification according to EN 1993-5:2007. Class 1 is obtained by verification of the rotation capacity for a class 2 cross-section.

To optimise the design of a steel sheet pile wall according to EN 1993-5:2007, use our free software *Durability* or contact our technical department.

Tailor made profiles can be rolled on request.

## Characteristics – AU™ sections

A weight reduction of about 10% compared to the 600 mm PU series has been achieved by optimising the geometric dimensions. The increased width **allows faster installation**, reduces the amount of coating required, due to the smaller perimeter, and increases watertightness thanks to fewer interlocks per metre of wall. Despite their greater width, the driving energy required for AU piles is not higher, thanks to their smooth and open shape and the patented radii at the web/flange connection.

## Characteristics – GU<sup>®</sup> sections

ArcelorMittal's rolling mill in Dabrowa, Poland, produces hot rolled U-shaped steel sheet piles. Some GU sections have the same geometry as equivalent PU sections.

## Characteristics – PU<sup>®</sup> sections

PU sections are 600 mm wide U-piles manufactured in Belval. The shapes of the **PU 18**, **PU 22** and **PU 28** have been engineered with "reinforced shoulders" yielding the optimum section geometry **for hard driving conditions** as well as **multiple re-use**. Re-using steel sheet piles drastically improves the environmental impact of a steel solution.

| Section      |  | S = Single pile<br>D = Double pile<br>T = Triple pile | Sectional<br>area | Mass  | Moment<br>of inertia | Elastic<br>section<br>modulus | Radius of<br>gyration | Coating<br>area <sup>1)</sup> |
|--------------|--|-------------------------------------------------------|-------------------|-------|----------------------|-------------------------------|-----------------------|-------------------------------|
|              |  |                                                       | cm <sup>2</sup>   | kg/m  | cm <sup>4</sup>      | cm <sup>3</sup>               | cm                    | m <sup>2</sup> /m             |
| AU™ sections |  |                                                       |                   |       |                      |                               |                       |                               |
| AU 14        |  | Per S                                                 | 99.2              | 77.9  | 6590                 | 457                           | 8.15                  | 0.96                          |
|              |  | Per D                                                 | 198.5             | 155.8 | 43020                | 2110                          | 14.73                 | 1.91                          |
|              |  | Per T                                                 | 297.7             | 233.7 | 59550                | 2435                          | 14.15                 | 2.86                          |
|              |  | Per m of wall                                         | 132.3             | 103.8 | 28680                | 1405                          | 14.73                 | 1.27                          |
|              |  |                                                       |                   |       |                      |                               |                       |                               |
| AU 16        |  | Per S                                                 | 109.9             | 86.3  | 7110                 | 481                           | 8.04                  | 0.96                          |
|              |  | Per D                                                 | 219.7             | 172.5 | 49280                | 2400                          | 14.98                 | 1.91                          |
|              |  | Per T                                                 | 329.6             | 258.7 | 68080                | 2750                          | 14.37                 | 2.86                          |
|              |  | Per m of wall                                         | 146.5             | 115.0 | 32850                | 1600                          | 14.98                 | 1.27                          |
|              |  |                                                       |                   |       |                      |                               |                       |                               |
| AU 18        |  | Per S                                                 | 112.7             | 88.5  | 8760                 | 554                           | 8.82                  | 1.01                          |
|              |  | Per D                                                 | 225.5             | 177.0 | 58950                | 2670                          | 16.17                 | 2.00                          |
|              |  | Per T                                                 | 338.2             | 265.5 | 81520                | 3065                          | 15.53                 | 2.99                          |
|              |  | Per m of wall                                         | 150.3             | 118.0 | 39300                | 1780                          | 16.17                 | 1.33                          |
|              |  |                                                       |                   |       |                      |                               |                       |                               |
| AU 20        |  | Per S                                                 | 123.4             | 96.9  | 9380                 | 579                           | 8.72                  | 1.01                          |
|              |  | Per D                                                 | 246.9             | 193.8 | 66660                | 3000                          | 16.43                 | 2.00                          |
|              |  | Per T                                                 | 370.3             | 290.7 | 92010                | 3425                          | 15.76                 | 2.99                          |
|              |  | Per m of wall                                         | 164.6             | 129.2 | 44440                | 2000                          | 16.43                 | 1.33                          |
|              |  |                                                       |                   |       |                      |                               |                       |                               |
| AU 23        |  | Per S                                                 | 130.1             | 102.1 | 9830                 | 579                           | 8.69                  | 1.03                          |
|              |  | Per D                                                 | 260.1             | 204.2 | 76050                | 3405                          | 17.10                 | 2.04                          |
|              |  | Per T                                                 | 390.2             | 306.3 | 104680               | 3840                          | 16.38                 | 3.05                          |
|              |  | Per m of wall                                         | 173.4             | 136.1 | 50700                | 2270                          | 17.10                 | 1.36                          |
|              |  |                                                       |                   |       |                      |                               |                       |                               |
| AU 25        |  | Per S                                                 | 140.6             | 110.4 | 10390                | 601                           | 8.60                  | 1.03                          |
|              |  | Per D                                                 | 281.3             | 220.8 | 84370                | 3750                          | 17.32                 | 2.04                          |
|              |  | Per T                                                 | 422.0             | 331.3 | 115950               | 4215                          | 16.58                 | 3.05                          |
|              |  | Per m of wall                                         | 187.5             | 147.2 | 56240                | 2500                          | 17.32                 | 1.36                          |
|              |  |                                                       |                   |       |                      |                               |                       |                               |

<sup>1)</sup> One side, excluding inside of interlocks.



Section

S = Single pile  
D = Double pile  
T = Triple pileSectional  
area

Mass

Moment  
of inertiaElastic  
section  
modulusRadius of  
gyrationCoating  
area<sup>1)</sup>cm<sup>2</sup>

kg/m


cm<sup>4</sup>cm<sup>3</sup>

cm

m<sup>2</sup>/m


## PU® sections

## PU 12




|               |       |              |       |             |       |      |
|---------------|-------|--------------|-------|-------------|-------|------|
| Per S         | 84.2  | <b>66.1</b>  | 4500  | <b>370</b>  | 7.31  | 0.80 |
| Per D         | 168.4 | <b>132.2</b> | 25920 | <b>1440</b> | 12.41 | 1.59 |
| Per T         | 252.6 | <b>198.3</b> | 36060 | <b>1690</b> | 11.95 | 2.38 |
| Per m of wall | 140.0 | <b>110.1</b> | 21600 | <b>1200</b> | 12.41 | 1.32 |

## PU 12S




|               |       |              |       |             |       |      |
|---------------|-------|--------------|-------|-------------|-------|------|
| Per S         | 90.5  | <b>71.0</b>  | 4830  | <b>400</b>  | 7.30  | 0.80 |
| Per D         | 181.0 | <b>142.1</b> | 27190 | <b>1510</b> | 12.26 | 1.59 |
| Per T         | 271.5 | <b>213.1</b> | 37860 | <b>1780</b> | 11.81 | 2.38 |
| Per m of wall | 150.8 | <b>118.4</b> | 22660 | <b>1260</b> | 12.26 | 1.32 |

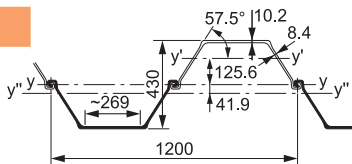
PU 18<sup>-1</sup>

|               |       |              |       |             |       |      |
|---------------|-------|--------------|-------|-------------|-------|------|
| Per S         | 92.5  | <b>72.6</b>  | 6960  | <b>475</b>  | 8.67  | 0.87 |
| Per D         | 185.0 | <b>145.2</b> | 43140 | <b>2005</b> | 15.30 | 1.72 |
| Per T         | 277.5 | <b>217.8</b> | 59840 | <b>2330</b> | 14.69 | 2.58 |
| Per m of wall | 154.2 | <b>121.0</b> | 35950 | <b>1670</b> | 15.30 | 1.43 |


## PU 18

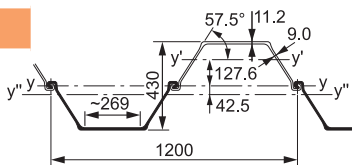

|               |       |              |       |             |       |      |
|---------------|-------|--------------|-------|-------------|-------|------|
| Per S         | 98.0  | <b>76.9</b>  | 7220  | <b>485</b>  | 8.58  | 0.87 |
| Per D         | 196.0 | <b>153.8</b> | 46380 | <b>2160</b> | 15.38 | 1.72 |
| Per T         | 294.0 | <b>230.7</b> | 64240 | <b>2495</b> | 14.78 | 2.58 |
| Per m of wall | 163.3 | <b>128.2</b> | 38650 | <b>1800</b> | 15.38 | 1.43 |

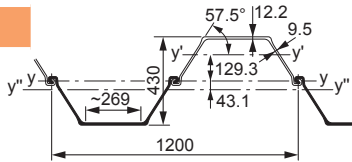
PU 18<sup>-1</sup>

|               |       |              |       |             |       |      |
|---------------|-------|--------------|-------|-------------|-------|------|
| Per S         | 103.4 | <b>81.1</b>  | 7480  | <b>495</b>  | 8.51  | 0.87 |
| Per D         | 206.8 | <b>162.3</b> | 49580 | <b>2305</b> | 15.49 | 1.72 |
| Per T         | 310.2 | <b>243.5</b> | 68600 | <b>2655</b> | 14.87 | 2.58 |
| Per m of wall | 172.3 | <b>135.2</b> | 41320 | <b>1920</b> | 15.49 | 1.43 |

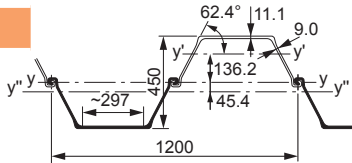
PU 22<sup>-1</sup>

|               |       |              |       |             |       |      |
|---------------|-------|--------------|-------|-------------|-------|------|
| Per S         | 104.3 | <b>81.9</b>  | 8460  | <b>535</b>  | 9.01  | 0.90 |
| Per D         | 208.7 | <b>163.8</b> | 55650 | <b>2475</b> | 16.33 | 1.79 |
| Per T         | 313.0 | <b>245.7</b> | 77020 | <b>2850</b> | 15.69 | 2.68 |
| Per m of wall | 173.9 | <b>136.5</b> | 46380 | <b>2060</b> | 16.33 | 1.49 |

## PU 22






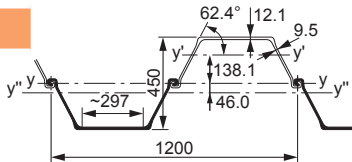


|               |       |              |       |             |       |      |
|---------------|-------|--------------|-------|-------------|-------|------|
| Per S         | 109.7 | <b>86.1</b>  | 8740  | <b>546</b>  | 8.93  | 0.90 |
| Per D         | 219.5 | <b>172.3</b> | 59360 | <b>2640</b> | 16.45 | 1.79 |
| Per T         | 329.2 | <b>258.4</b> | 82060 | <b>3025</b> | 15.79 | 2.68 |
| Per m of wall | 182.9 | <b>143.6</b> | 49460 | <b>2200</b> | 16.45 | 1.49 |









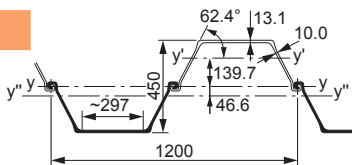
PU 22<sup>-1</sup>

|               |       |              |       |             |       |      |
|---------------|-------|--------------|-------|-------------|-------|------|
| Per S         | 115.2 | <b>90.4</b>  | 9020  | <b>555</b>  | 8.85  | 0.90 |
| Per D         | 230.4 | <b>180.9</b> | 63010 | <b>2800</b> | 16.54 | 1.79 |
| Per T         | 345.6 | <b>271.3</b> | 87020 | <b>3205</b> | 15.87 | 2.68 |
| Per m of wall | 192.0 | <b>150.7</b> | 52510 | <b>2335</b> | 16.54 | 1.49 |

<sup>1)</sup> One side, excluding inside of interlocks.




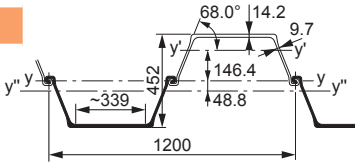
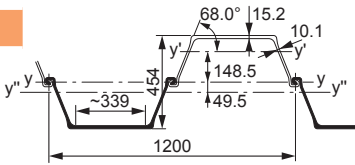
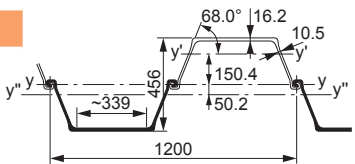
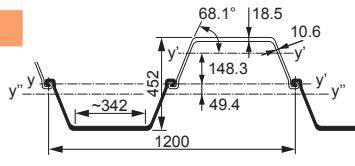
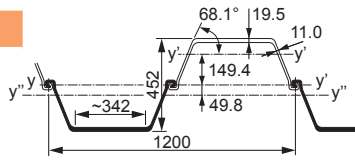
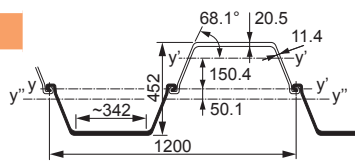
| Section                  |                                                                                   | S = Single pile<br>D = Double pile<br>T = Triple pile                               | Sectional<br>area | Mass  | Moment<br>of inertia | Elastic<br>section<br>modulus | Radius of<br>gyration | Coating<br>area <sup>1)</sup> |
|--------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------|-------|----------------------|-------------------------------|-----------------------|-------------------------------|
|                          |                                                                                   |                                                                                     | cm <sup>2</sup>   | kg/m  | cm <sup>4</sup>      | cm <sup>3</sup>               | cm                    | m <sup>2</sup> /m             |
| PU <sup>®</sup> sections |                                                                                   |                                                                                     |                   |       |                      |                               |                       |                               |
| PU 28 <sup>1</sup>       |  | Per S                                                                               | 124.1             | 97.4  | 9740                 | 576                           | 8.86                  | 0.93                          |
|                          |                                                                                   | Per D                                                                               | 248.2             | 194.8 | 72700                | 3215                          | 17.12                 | 1.85                          |
|                          |                                                                                   | Per T                                                                               | 372.3             | 292.2 | 100170               | 3645                          | 16.40                 | 2.77                          |
|                          |                                                                                   | Per m of wall                                                                       | 206.8             | 162.3 | 60580                | 2680                          | 17.12                 | 1.54                          |
|                          | PU 28                                                                             |    | Per S             | 129.7 | 101.8                | 10070                         | 589                   | 8.81                          |
| Per D                    |                                                                                   |                                                                                     | 259.4             | 203.6 | 77350                | 3405                          | 17.27                 | 1.85                          |
| Per T                    |                                                                                   |                                                                                     | 389.0             | 305.4 | 106490               | 3850                          | 16.55                 | 2.77                          |
| Per m of wall            |                                                                                   |                                                                                     | 216.1             | 169.6 | 64460                | 2840                          | 17.27                 | 1.54                          |
| PU 28 <sup>11</sup>      |                                                                                   |    | Per S             | 135.3 | 106.2                | 10400                         | 600                   | 8.77                          |
|                          | Per D                                                                             |                                                                                     | 270.7             | 212.5 | 82060                | 3600                          | 17.41                 | 1.85                          |
|                          | Per T                                                                             |                                                                                     | 406.0             | 318.7 | 112870               | 4060                          | 16.67                 | 2.77                          |
|                          | Per m of wall                                                                     |                                                                                     | 225.6             | 177.1 | 68380                | 3000                          | 17.41                 | 1.54                          |
|                          | PU 32 <sup>1</sup>                                                                |   | Per S             | 140.0 | 109.9                | 10740                         | 625                   | 8.76                          |
| Per D                    |                                                                                   |                                                                                     | 280.0             | 219.8 | 83050                | 3675                          | 17.22                 | 1.83                          |
| Per T                    |                                                                                   |                                                                                     | 420.0             | 329.7 | 114310               | 4150                          | 16.50                 | 2.74                          |
| Per m of wall            |                                                                                   |                                                                                     | 233.3             | 183.2 | 69210                | 3065                          | 17.22                 | 1.52                          |
| PU 32                    |                                                                                   |  | Per S             | 145.4 | 114.1                | 10950                         | 633                   | 8.68                          |
|                          | Per D                                                                             |                                                                                     | 290.8             | 228.3 | 86790                | 3840                          | 17.28                 | 1.83                          |
|                          | Per T                                                                             |                                                                                     | 436.2             | 342.4 | 119370               | 4330                          | 16.54                 | 2.74                          |
|                          | Per m of wall                                                                     |                                                                                     | 242.3             | 190.2 | 72320                | 3200                          | 17.28                 | 1.52                          |
|                          | PU 32 <sup>11</sup>                                                               |  | Per S             | 150.8 | 118.4                | 11150                         | 640                   | 8.60                          |
| Per D                    |                                                                                   |                                                                                     | 301.6             | 236.8 | 90490                | 4005                          | 17.32                 | 1.83                          |
| Per T                    |                                                                                   |                                                                                     | 452.4             | 355.2 | 124370               | 4505                          | 16.58                 | 2.74                          |
| Per m of wall            |                                                                                   |                                                                                     | 251.3             | 197.3 | 75410                | 3340                          | 17.32                 | 1.52                          |

<sup>1)</sup> One side, excluding inside of interlocks.


| Section                  |                                                                                     | S = Single pile<br>D = Double pile<br>T = Triple pile | Sectional area  | Mass  | Moment of inertia | Elastic section modulus | Radius of gyration | Coating area <sup>1)</sup> |
|--------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------|-----------------|-------|-------------------|-------------------------|--------------------|----------------------------|
|                          |                                                                                     |                                                       | cm <sup>2</sup> | kg/m  | cm <sup>4</sup>   | cm <sup>3</sup>         | cm                 | m <sup>2</sup> /m          |
| GU <sup>®</sup> sections |                                                                                     |                                                       |                 |       |                   |                         |                    |                            |
| GU 6N                    |    | Per S                                                 | 53.4            | 41.9  | 2160              | 215                     | 6.36               | 0.76                       |
|                          |                                                                                     | Per D                                                 | 106.8           | 83.8  | 11610             | 750                     | 10.43              | 1.51                       |
|                          |                                                                                     | Per T                                                 | 160.2           | 125.7 | 16200             | 890                     | 10.06              | 2.26                       |
|                          |                                                                                     | Per m of wall                                         | 89.0            | 69.9  | 9670              | 625                     | 10.43              | 1.26                       |
|                          |                                                                                     |                                                       |                 |       |                   |                         |                    |                            |
| GU 7N                    |    | Per S                                                 | 56.2            | 44.1  | 2250              | 220                     | 6.33               | 0.76                       |
|                          |                                                                                     | Per D                                                 | 112.4           | 88.2  | 12540             | 810                     | 10.56              | 1.51                       |
|                          |                                                                                     | Per T                                                 | 168.6           | 132.4 | 17470             | 955                     | 10.18              | 2.26                       |
|                          |                                                                                     | Per m of wall                                         | 93.7            | 73.5  | 10450             | 675                     | 10.56              | 1.26                       |
|                          |                                                                                     |                                                       |                 |       |                   |                         |                    |                            |
| GU 7S                    |    | Per S                                                 | 58.9            | 46.3  | 2370              | 225                     | 6.35               | 0.76                       |
|                          |                                                                                     | Per D                                                 | 117.9           | 92.5  | 13850             | 890                     | 10.84              | 1.51                       |
|                          |                                                                                     | Per T                                                 | 176.8           | 138.8 | 19260             | 1045                    | 10.44              | 2.26                       |
|                          |                                                                                     | Per m of wall                                         | 98.2            | 77.1  | 11540             | 740                     | 10.84              | 1.26                       |
|                          |                                                                                     |                                                       |                 |       |                   |                         |                    |                            |
| GU 7HWS                  |   | Per S                                                 | 60.4            | 47.4  | 2380              | 225                     | 6.28               | 0.76                       |
|                          |                                                                                     | Per D                                                 | 120.9           | 94.9  | 13940             | 895                     | 10.74              | 1.51                       |
|                          |                                                                                     | Per T                                                 | 181.3           | 142.3 | 19390             | 1050                    | 10.34              | 2.26                       |
|                          |                                                                                     | Per m of wall                                         | 100.7           | 79.1  | 11620             | 745                     | 10.74              | 1.26                       |
|                          |                                                                                     |                                                       |                 |       |                   |                         |                    |                            |
| GU 8N                    |  | Per S                                                 | 61.8            | 48.5  | 2420              | 225                     | 6.26               | 0.76                       |
|                          |                                                                                     | Per D                                                 | 123.7           | 97.1  | 14420             | 925                     | 10.80              | 1.51                       |
|                          |                                                                                     | Per T                                                 | 185.5           | 145.6 | 20030             | 1080                    | 10.39              | 2.26                       |
|                          |                                                                                     | Per m of wall                                         | 103.1           | 80.9  | 12010             | 770                     | 10.80              | 1.26                       |
|                          |                                                                                     |                                                       |                 |       |                   |                         |                    |                            |
| GU 8S                    |  | Per S                                                 | 64.7            | 50.8  | 2510              | 230                     | 6.23               | 0.76                       |
|                          |                                                                                     | Per D                                                 | 129.3           | 101.5 | 15360             | 980                     | 10.90              | 1.51                       |
|                          |                                                                                     | Per T                                                 | 194.0           | 152.3 | 21320             | 1145                    | 10.48              | 2.26                       |
|                          |                                                                                     | Per m of wall                                         | 107.8           | 84.6  | 12800             | 820                     | 10.90              | 1.26                       |
|                          |                                                                                     |                                                       |                 |       |                   |                         |                    |                            |
| GU 10N                   |  | Per S                                                 | 71.1            | 55.8  | 3100              | 270                     | 6.60               | 0.78                       |
|                          |                                                                                     | Per D                                                 | 142.2           | 111.6 | 18840             | 1190                    | 11.51              | 1.55                       |
|                          |                                                                                     | Per T                                                 | 213.3           | 167.4 | 26150             | 1380                    | 11.07              | 2.32                       |
|                          |                                                                                     | Per m of wall                                         | 118.5           | 93.0  | 15700             | 995                     | 11.51              | 1.29                       |
|                          |                                                                                     |                                                       |                 |       |                   |                         |                    |                            |
| GU 11N                   |  | Per S                                                 | 76.7            | 60.2  | 3280              | 280                     | 6.53               | 0.78                       |
|                          |                                                                                     | Per D                                                 | 153.4           | 120.4 | 20930             | 1315                    | 11.68              | 1.55                       |
|                          |                                                                                     | Per T                                                 | 230.1           | 180.7 | 29010             | 1515                    | 11.23              | 2.32                       |
|                          |                                                                                     | Per m of wall                                         | 127.9           | 100.4 | 17450             | 1095                    | 11.68              | 1.29                       |
|                          |                                                                                     |                                                       |                 |       |                   |                         |                    |                            |
| GU 12N                   |  | Per S                                                 | 82.3            | 64.6  | 3450              | 290                     | 6.47               | 0.78                       |
|                          |                                                                                     | Per D                                                 | 164.7           | 129.3 | 23060             | 1440                    | 11.83              | 1.55                       |
|                          |                                                                                     | Per T                                                 | 247.0           | 193.9 | 31890             | 1650                    | 11.36              | 2.32                       |
|                          |                                                                                     | Per m of wall                                         | 137.2           | 107.7 | 19220             | 1200                    | 11.83              | 1.29                       |
|                          |                                                                                     |                                                       |                 |       |                   |                         |                    |                            |

<sup>1)</sup> One side, excluding inside of interlocks.

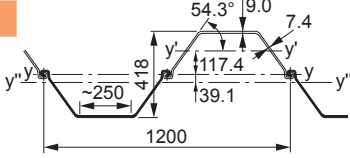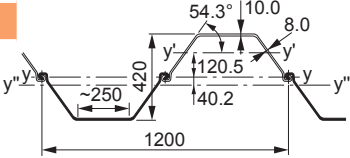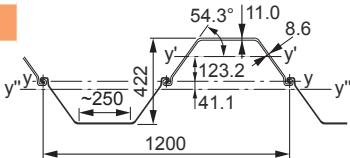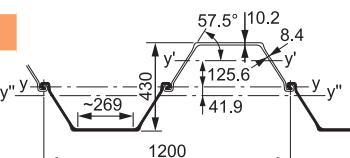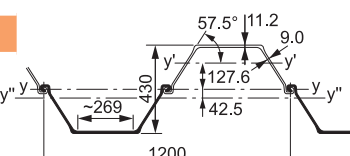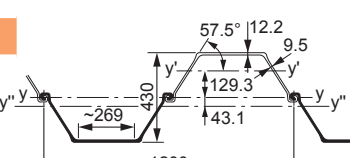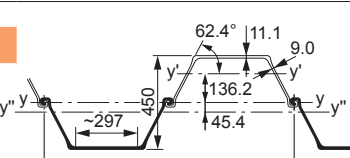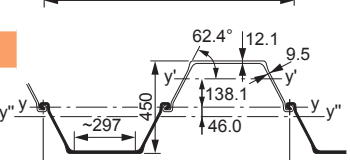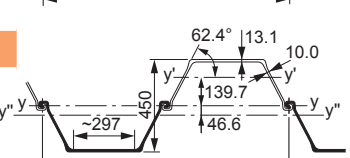

| Section      |                                                                                     | S = Single pile<br>D = Double pile<br>T = Triple pile | Sectional area  | Mass  | Moment of inertia | Elastic section modulus | Radius of gyration | Coating area <sup>1)</sup> |
|--------------|-------------------------------------------------------------------------------------|-------------------------------------------------------|-----------------|-------|-------------------|-------------------------|--------------------|----------------------------|
|              |                                                                                     |                                                       | cm <sup>2</sup> | kg/m  | cm <sup>4</sup>   | cm <sup>3</sup>         | cm                 | m <sup>2</sup> /m          |
| GU® sections |                                                                                     |                                                       |                 |       |                   |                         |                    |                            |
| GU 13N       |    | Per S                                                 | 76.3            | 59.9  | 5440              | 395                     | 8.44               | 0.85                       |
|              |                                                                                     | Per D                                                 | 152.6           | 119.8 | 31900             | 1525                    | 14.46              | 1.69                       |
|              |                                                                                     | Per T                                                 | 228.9           | 179.7 | 44350             | 1785                    | 13.92              | 2.53                       |
|              |                                                                                     | Per m of wall                                         | 127.2           | 99.8  | 26590             | 1270                    | 14.46              | 1.41                       |
|              |                                                                                     |                                                       |                 |       |                   |                         |                    |                            |
| GU 14N       |    | Per S                                                 | 81.9            | 64.3  | 5750              | 410                     | 8.38               | 0.85                       |
|              |                                                                                     | Per D                                                 | 163.8           | 128.6 | 35290             | 1680                    | 14.68              | 1.69                       |
|              |                                                                                     | Per T                                                 | 245.6           | 192.8 | 48970             | 1955                    | 14.12              | 2.53                       |
|              |                                                                                     | Per m of wall                                         | 136.5           | 107.1 | 29410             | 1400                    | 14.68              | 1.41                       |
|              |                                                                                     |                                                       |                 |       |                   |                         |                    |                            |
| GU 15N       |    | Per S                                                 | 87.5            | 68.7  | 6070              | 425                     | 8.33               | 0.85                       |
|              |                                                                                     | Per D                                                 | 175.1           | 137.4 | 38710             | 1835                    | 14.87              | 1.69                       |
|              |                                                                                     | Per T                                                 | 262.6           | 206.2 | 53640             | 2130                    | 14.29              | 2.53                       |
|              |                                                                                     | Per m of wall                                         | 145.9           | 114.5 | 32260             | 1530                    | 14.87              | 1.41                       |
|              |                                                                                     |                                                       |                 |       |                   |                         |                    |                            |
| GU 16N       |   | Per S                                                 | 92.5            | 72.6  | 6960              | 475                     | 8.67               | 0.87                       |
|              |                                                                                     | Per D                                                 | 185.0           | 145.2 | 43140             | 2005                    | 15.30              | 1.72                       |
|              |                                                                                     | Per T                                                 | 277.5           | 217.8 | 59840             | 2330                    | 14.69              | 2.58                       |
|              |                                                                                     | Per m of wall                                         | 154.2           | 121.0 | 35950             | 1670                    | 15.30              | 1.43                       |
|              |                                                                                     |                                                       |                 |       |                   |                         |                    |                            |
| GU 18N       |  | Per S                                                 | 98.0            | 76.9  | 7220              | 485                     | 8.58               | 0.87                       |
|              |                                                                                     | Per D                                                 | 196.0           | 153.8 | 46380             | 2160                    | 15.38              | 1.72                       |
|              |                                                                                     | Per T                                                 | 294.0           | 230.7 | 64240             | 2495                    | 14.78              | 2.58                       |
|              |                                                                                     | Per m of wall                                         | 163.3           | 128.2 | 38650             | 1800                    | 15.38              | 1.43                       |
|              |                                                                                     |                                                       |                 |       |                   |                         |                    |                            |
| GU 20N       |  | Per S                                                 | 103.4           | 81.1  | 7480              | 495                     | 8.51               | 0.87                       |
|              |                                                                                     | Per D                                                 | 206.8           | 162.3 | 49580             | 2305                    | 15.49              | 1.72                       |
|              |                                                                                     | Per T                                                 | 310.2           | 243.5 | 68600             | 2655                    | 14.87              | 2.58                       |
|              |                                                                                     | Per m of wall                                         | 172.3           | 135.2 | 41320             | 1920                    | 15.49              | 1.43                       |
|              |                                                                                     |                                                       |                 |       |                   |                         |                    |                            |
| GU 21N       |  | Per S                                                 | 104.3           | 81.9  | 8460              | 535                     | 9.01               | 0.90                       |
|              |                                                                                     | Per D                                                 | 208.7           | 163.8 | 55650             | 2475                    | 16.33              | 1.79                       |
|              |                                                                                     | Per T                                                 | 313.0           | 245.7 | 77020             | 2850                    | 15.69              | 2.68                       |
|              |                                                                                     | Per m of wall                                         | 173.9           | 136.5 | 46380             | 2060                    | 16.33              | 1.49                       |
|              |                                                                                     |                                                       |                 |       |                   |                         |                    |                            |
| GU 22N       |  | Per S                                                 | 109.7           | 86.1  | 8740              | 546                     | 8.93               | 0.90                       |
|              |                                                                                     | Per D                                                 | 219.5           | 172.3 | 59360             | 2640                    | 16.45              | 1.79                       |
|              |                                                                                     | Per T                                                 | 329.2           | 258.4 | 82060             | 3025                    | 15.79              | 2.68                       |
|              |                                                                                     | Per m of wall                                         | 182.9           | 143.6 | 49460             | 2200                    | 16.45              | 1.49                       |
|              |                                                                                     |                                                       |                 |       |                   |                         |                    |                            |
| GU 23N       |  | Per S                                                 | 115.2           | 90.4  | 9020              | 555                     | 8.85               | 0.90                       |
|              |                                                                                     | Per D                                                 | 230.4           | 180.9 | 63010             | 2800                    | 16.54              | 1.79                       |
|              |                                                                                     | Per T                                                 | 345.6           | 271.3 | 87020             | 3205                    | 15.87              | 2.68                       |
|              |                                                                                     | Per m of wall                                         | 192.0           | 150.7 | 52510             | 2335                    | 16.54              | 1.49                       |
|              |                                                                                     |                                                       |                 |       |                   |                         |                    |                            |

<sup>1)</sup> One side, excluding inside of interlocks.


| Section      |  | S = Single pile<br>D = Double pile<br>T = Triple pile | Sectional area  | Mass | Moment of inertia | Elastic section modulus | Radius of gyration | Coating area <sup>1)</sup> |
|--------------|--|-------------------------------------------------------|-----------------|------|-------------------|-------------------------|--------------------|----------------------------|
|              |  |                                                       | cm <sup>2</sup> | kg/m | cm <sup>4</sup>   | cm <sup>3</sup>         | cm                 | m <sup>2</sup> /m          |
| GU® sections |  |                                                       |                 |      |                   |                         |                    |                            |
| GU 27N       |  |                                                       |                 |      |                   |                         |                    |                            |

<sup>1)</sup> One side, excluding inside of interlocks.

## Interlock

All AU™, PU® and GU® sheet piles feature Larssen interlocks in accordance with EN 10248. AU, PU and GU (except GU-400), as well as the AZ series, can be interlocked.

Theoretical interlock swing:  $\alpha_{\max} = 5^\circ$

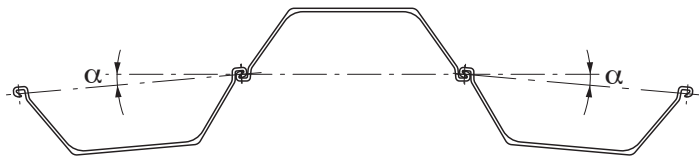

## Delivery form

Single Pile




Double Pile  
S-Form (standard)



Double Pile  
Z-Form (on request)




Triple Pile




Double Pile: S-Form (standard)

If you can recognize the letter "S" on the top of the pile, it's a double pile **S-Form**

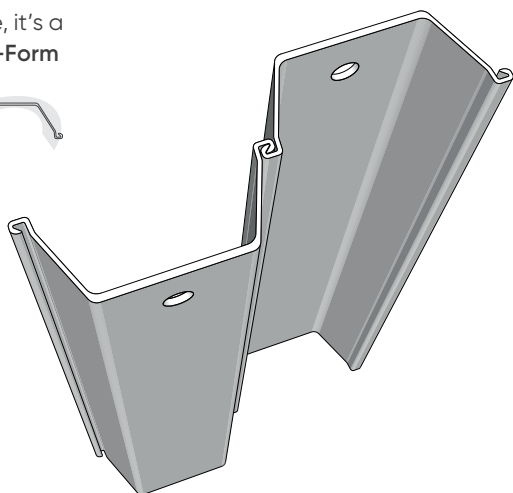


Double Pile: Z-Form (on request)

If you can recognize the letter "Z" on the top of the pile, it's a double pile **Z-Form**

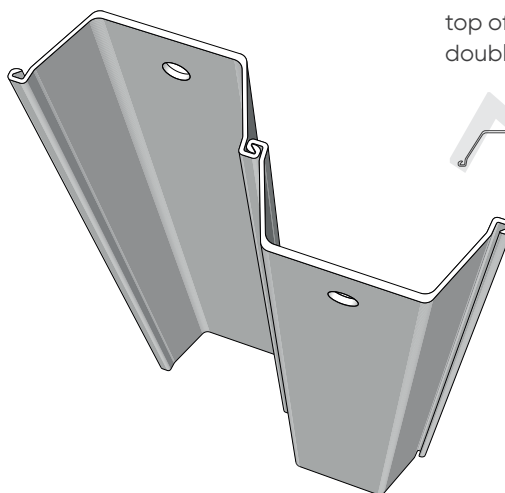

## Bent piles


Maximum bending angle:  $\beta = 25^\circ$ . U-piles are bent in the middle of the flange. They are generally delivered as single piles. Double piles are available upon request.

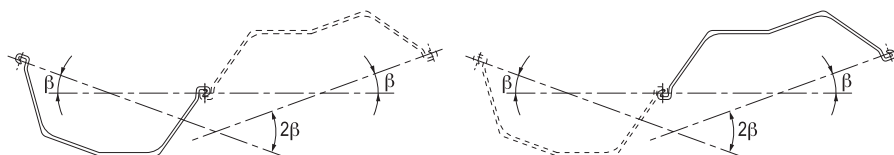




## Corner sections


C 9  
Mass ~ 9.3 kg/m  
Coating area 0.15 m<sup>2</sup>/m




C 14  
Mass ~ 14.4 kg/m  
Coating area 0.22 m<sup>2</sup>/m



DELTA 13  
Mass ~ 13.1 kg/m  
Coating area 0.19 m<sup>2</sup>/m



OMEGA 18  
Mass ~ 18.0 kg/m  
Coating area 0.24 m<sup>2</sup>/m









Special corner sections interlocking with U- and Z-sections make it possible to form corner or junction piles without using fabricated special piles. Corner sections are fixed to the sheet pile in accordance with EN 12063.

Different welding specifications are available on request. The corner sections are threaded and welded with usually a 200 mm setback from the top of the piles.

## Fabricated piles, corner and junction piles

On request, arrangements can be made for widened or narrowed fabricated piles. The following special piles, among others, are available on request as single and double piles.

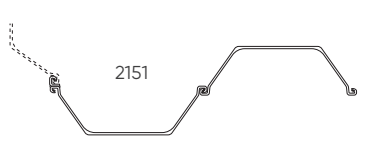

## Crimping

Contrary to Z-piles, the interlocks of U-piles have to transmit shear forces. To guarantee proper shear force transmission, ArcelorMittal's U-sections can be delivered as double piles with crimped interlocks.

**A characteristic resistance  $R_k$  per crimping point of minimum 75 kN at a displacement of up to 10 mm can be achieved for most profiles<sup>2)</sup>.**

The theoretical section properties of a continuous wall may have to be reduced even for double piles crimped<sup>3)</sup>.



<sup>1)</sup> Amount and layout of crimping points may differ at both ends. Special crimping on request.

<sup>2)</sup> The value of  $R_k$  depends predominantly on the profile and steel grade. Please contact our technical department for more information. See also EN 10248-1:2023 for the testing procedure and for additional stiffness requirement of the crimping points.

<sup>3)</sup> Based on EN 1993-5:2007. Please consult our Technical Department for more information.

## Tie back system

Most sheet pile retaining walls need supplementary support at the top, in addition to embedment in the soil. Temporary cofferdams generally use walers and struts (fixed or hydraulic) for cross-bracing inside the excavation. Permanent or large retaining walls are often tied back to an anchor wall installed at a certain distance behind the main wall. Injection anchors and anchor piles can also be used.



The drawing shows a typical horizontal tie-rod connection for U-section sheet pile walls.



### Standard crimping pattern<sup>1)</sup>

AU sections:  
6 crimping points per 1.5 m  
≈ 4 crimping points per m


PU/GU sections:  
6 crimping points per 1.7 m  
≈ 3.5 crimping points per m

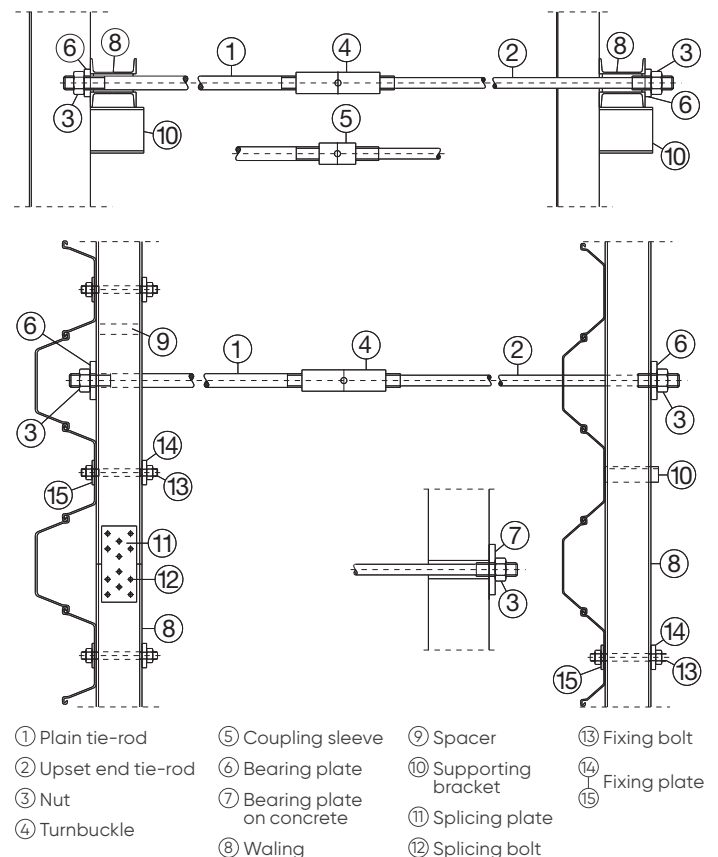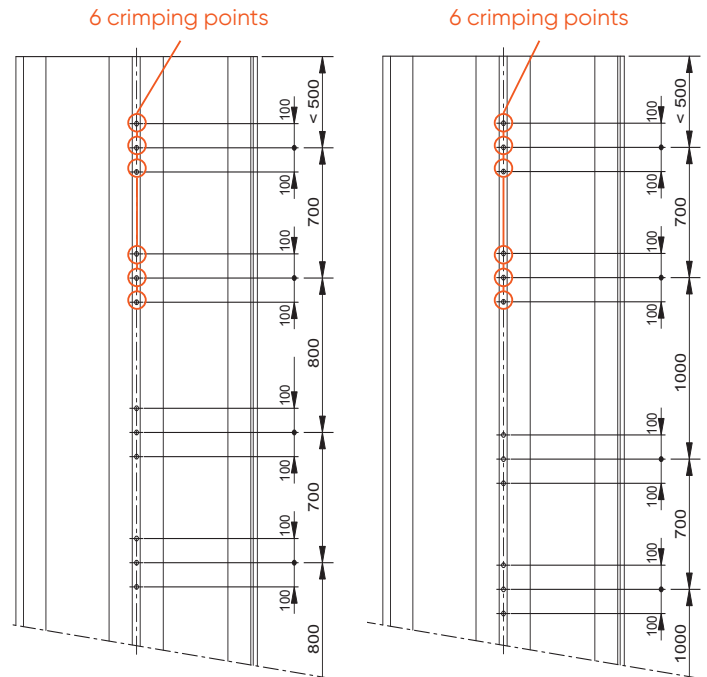

# HZ<sup>®</sup> / AZ<sup>®</sup> combined wall system

The HZ<sup>®</sup>-M combined wall is a revolutionary system, an extremely cost-effective combined wall solution launched in 2008 to replace the former HZ/AZ system, and consists of:

- HZ<sup>®</sup>-M king piles;
- a pair of AZ<sup>®</sup> sheet piles as intermediary elements;
- special connectors (RH, RZD, RZU).

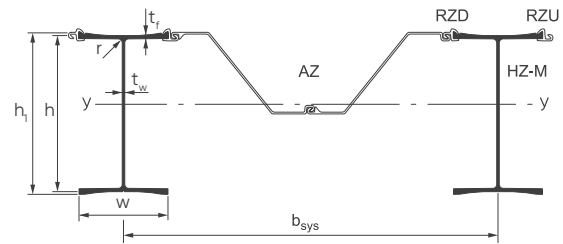

The HZ-M king piles, with milled grooves on the flanges and thicknesses up to 40 mm, fulfill two different structural functions:

- retaining members for soil and hydrostatic pressures;
- bearing piles for vertical loads.

The combinations are based on the same principle: structural supports comprising 1 or 2 HZ-M king pile sections alternating




with or without intermediary double AZ sheet pile sections. The intermediary sheet piles have a soil-retaining and load-transferring function and are generally shorter than the HZ-M king piles. Depending on the combinations and steel grades adopted, the achievable bending moment capacity lies above 21 000 kNm/m ( $W_{el}$  up to 46 500 cm<sup>3</sup>/m).

| Section<br>(Sol. 102) | Dimensions     |        |     |                  |                |                |    | Torsional<br>constant | Warping<br>constant | Sectional<br>area | Mass  | Moment<br>of<br>inertia | Elastic<br>section<br>modulus | Coating<br>area | Connector<br>set |
|-----------------------|----------------|--------|-----|------------------|----------------|----------------|----|-----------------------|---------------------|-------------------|-------|-------------------------|-------------------------------|-----------------|------------------|
|                       | h <sub>1</sub> | h      | w   | t <sub>max</sub> | t <sub>f</sub> | t <sub>w</sub> | r  |                       |                     |                   |       | y-y                     | y-y                           |                 |                  |
|                       |                |        |     |                  |                |                |    |                       |                     |                   |       | mm                      | mm                            |                 |                  |
| HZ 630M <sup>1)</sup> | 631.4          | 615.7  | 420 | 29.0             | 24.2           | 16.0           | 30 | 569.2                 | 28410               | 308.6             | 242.2 | 217460                  | 6985                          | 2.870           | A                |
| HZ 880M A             | 831.3          | 803.4  | 458 | 29.0             | 18.9           | 13.0           | 30 | 375.0                 | 58600               | 296.6             | 232.8 | 357280                  | 8800                          | 3.426           | A                |
| HZ 880M B             | 831.3          | 807.4  | 460 | 29.0             | 20.9           | 15.0           | 30 | 490.1                 | 63000               | 328.9             | 258.2 | 392750                  | 9625                          | 3.431           | A                |
| HZ 880M C             | 831.3          | 811.4  | 460 | 29.0             | 22.9           | 15.0           | 30 | 570.2                 | 65890               | 343.4             | 269.6 | 416770                  | 10170                         | 3.431           | A                |
| HZ 1080M A            | 1075.3         | 1047.4 | 454 | 29.0             | 19.6           | 16.0           | 30 | 525.9                 | 98560               | 368.7             | 289.4 | 690560                  | 13075                         | 3.877           | A                |
| HZ 1080M B            | 1075.3         | 1053.4 | 454 | 29.0             | 22.6           | 16.0           | 30 | 656.5                 | 106800              | 391.7             | 307.5 | 754830                  | 14205                         | 3.878           | A                |
| HZ 1080M C            | 1075.3         | 1059.4 | 456 | 29.0             | 25.7           | 18.0           | 30 | 876.2                 | 114500              | 433.7             | 340.5 | 833250                  | 15605                         | 3.881           | A                |
| HZ 1080M D            | 1075.3         | 1067.4 | 457 | 30.7             | 29.7           | 19.0           | 30 | 1129.1                | 121000              | 467.7             | 367.2 | 909650                  | 16920                         | 3.882           | A                |
| HZ 1180M A            | 1075.4         | -      | 458 | 34.7             | 31.0           | 20.0           | 30 | 1352.9                | 124600              | 494.9             | 388.5 | 967270                  | 17865                         | 3.884           | A                |
| HZ 1180M B            | 1079.4         | -      | 458 | 36.7             | 33.0           | 20.0           | 30 | 1544.3                | 132400              | 512.1             | 402.0 | 1017000                 | 18675                         | 3.895           | A                |
| HZ 1180M C            | 1083.4         | -      | 459 | 38.7             | 35.0           | 21.0           | 30 | 1817.9                | 142600              | 541.2             | 424.9 | 1081070                 | 19790                         | 3.905           | B                |
| HZ 1180M D            | 1087.4         | -      | 460 | 40.7             | 37.0           | 22.0           | 30 | 2110.2                | 150000              | 568.1             | 445.9 | 1138630                 | 20690                         | 3.919           | B                |

## Connectors

|        |      |      |      |  |  |      |             |     |           |  |   |
|--------|------|------|------|--|--|------|-------------|-----|-----------|--|---|
| RH 16  | 61.8 | 68.2 | 12.2 |  |  | 20.1 | <b>15.8</b> | 83  | <b>25</b> |  | A |
| RZD 16 | 61.8 | 80.5 |      |  |  | 20.7 | <b>16.2</b> | 57  | <b>18</b> |  |   |
| RZU 16 | 61.8 | 80.5 |      |  |  | 20.4 | <b>16.0</b> | 68  | <b>18</b> |  |   |
| RH 20  | 67.3 | 79.2 | 14.2 |  |  | 25.2 | <b>19.8</b> | 122 | <b>33</b> |  | B |
| RZD 18 | 67.3 | 85.0 |      |  |  | 23.0 | <b>18.0</b> | 78  | <b>22</b> |  |   |
| RZU 18 | 67.3 | 85.0 |      |  |  | 22.6 | <b>17.8</b> | 92  | <b>22</b> |  |   |



<sup>1)</sup> Available upon request.






The outstanding feature of the HZ/AZ combined wall system is the extensive range of possible combinations using the entire AZ sheet pile offer, including the latest wide AZ-800 range, as well as all rolled-up and rolled-down AZ sections. The table below contains but a small sample of the available systems. Please refer to our brochure "The HZ®-M Steel Wall System" for detailed information on the entire HZ®/AZ® range.

### Denomination example of the HZ/AZ system

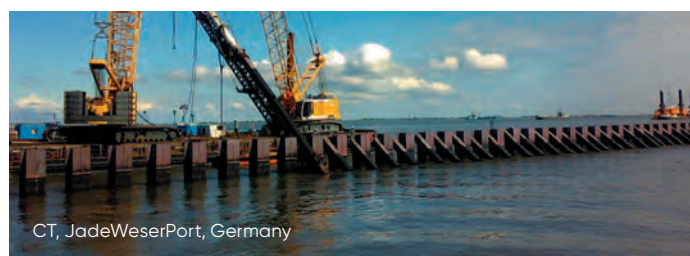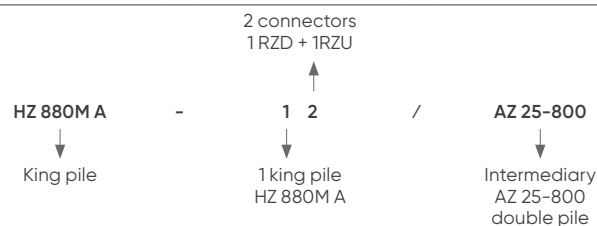


| Section | Sectional area     | Moment of inertia <sup>1)</sup> | Elastic <sup>1)2)</sup> section modulus | Elastic <sup>1)3)</sup> section modulus | Mass <sup>4)</sup>  |                    | Global Warming Potential <sup>5)</sup>                           | Coating area <sup>6)</sup>      |
|---------|--------------------|---------------------------------|-----------------------------------------|-----------------------------------------|---------------------|--------------------|------------------------------------------------------------------|---------------------------------|
|         |                    |                                 |                                         |                                         | Mass <sub>100</sub> | Mass <sub>60</sub> |                                                                  |                                 |
|         | cm <sup>2</sup> /m | cm <sup>4</sup> /m              | cm <sup>3</sup> /m                      | cm <sup>3</sup> /m                      | kg/m <sup>2</sup>   | kg/m <sup>2</sup>  | GWP <sub>60</sub> (A1-A3)<br>kg CO <sub>2</sub> e/m <sup>2</sup> | Water side<br>m <sup>2</sup> /m |

### Combination HZ ... M - 12 / AZ 25-800



|                       |       |        |              |       |     |     |       |      |
|-----------------------|-------|--------|--------------|-------|-----|-----|-------|------|
| HZ 630M <sup>7)</sup> | 292.3 | 165710 | <b>4870</b>  | 5455  | 229 | 184 | 75.3  | 2.70 |
| HZ 880M A             | 281.5 | 240530 | <b>5385</b>  | 6150  | 221 | 176 | 72.0  | 2.73 |
| HZ 880M B             | 296.4 | 257290 | <b>5790</b>  | 6510  | 233 | 188 | 76.9  | 2.74 |
| HZ 880M C             | 303.2 | 268670 | <b>6040</b>  | 6770  | 238 | 193 | 78.9  | 2.74 |
| HZ 1080M A            | 316.0 | 418410 | <b>7315</b>  | 8205  | 248 | 203 | 83.0  | 2.73 |
| HZ 1080M B            | 326.8 | 449000 | <b>7850</b>  | 8755  | 257 | 212 | 86.7  | 2.73 |
| HZ 1080M C            | 346.3 | 485830 | <b>8510</b>  | 9400  | 272 | 227 | 92.8  | 2.73 |
| HZ 1080M D            | 362.1 | 521780 | <b>9120</b>  | 10045 | 284 | 240 | 98.2  | 2.73 |
| HZ 1180M A            | 374.7 | 548790 | <b>9560</b>  | 10525 | 294 | 250 | 102.3 | 2.73 |
| HZ 1180M B            | 382.8 | 572490 | <b>9970</b>  | 10935 | 300 | 256 | 104.7 | 2.74 |
| HZ 1180M C            | 398.4 | 607290 | <b>10505</b> | 11575 | 313 | 267 | 109.2 | 2.75 |
| HZ 1180M D            | 410.8 | 634670 | <b>11015</b> | 12010 | 322 | 277 | 113.3 | 2.75 |

### Combination HZ ... M - 24 / AZ 25-800

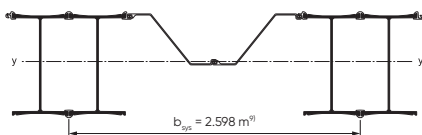

|                       |       |        |              |       |     |     |       |      |
|-----------------------|-------|--------|--------------|-------|-----|-----|-------|------|
| HZ 630M <sup>7)</sup> | 377.5 | 236070 | <b>7245</b>  | 6665  | 296 | 259 | 105.9 | 3.18 |
| HZ 880M A             | 357.5 | 356530 | <b>8360</b>  | 7735  | 281 | 244 | 99.8  | 3.26 |
| HZ 880M B             | 381.6 | 382980 | <b>8985</b>  | 8350  | 300 | 263 | 107.6 | 3.26 |
| HZ 880M C             | 392.7 | 401480 | <b>9395</b>  | 8770  | 308 | 272 | 111.2 | 3.26 |
| HZ 1080M A            | 414.3 | 646970 | <b>11760</b> | 11065 | 325 | 289 | 118.2 | 3.25 |
| HZ 1080M B            | 431.8 | 695900 | <b>12610</b> | 11935 | 339 | 302 | 123.5 | 3.25 |
| HZ 1080M C            | 463.5 | 755430 | <b>13670</b> | 13005 | 364 | 327 | 133.7 | 3.26 |
| HZ 1080M D            | 489.3 | 813780 | <b>14665</b> | 14045 | 384 | 348 | 142.3 | 3.26 |
| HZ 1180M A            | 509.8 | 857500 | <b>15370</b> | 14825 | 400 | 364 | 148.9 | 3.26 |
| HZ 1180M B            | 522.1 | 893300 | <b>15970</b> | 15460 | 410 | 373 | 152.6 | 3.26 |
| HZ 1180M C            | 549.4 | 955970 | <b>17010</b> | 16445 | 431 | 394 | 161.1 | 3.28 |
| HZ 1180M D            | 567.7 | 994160 | <b>17650</b> | 17125 | 446 | 409 | 167.3 | 3.29 |

<sup>1)</sup> Characteristics according to the Global Safety Approach - Refer to the "HZ-M Steel Wall System" catalogue for characteristics according to EN 1993-5:2007 design approach.

<sup>2)</sup> Referring outside of HZ-M flange.

<sup>3)</sup> Referring outside of RH / RZ.

<sup>4)</sup>  $L_{RH} = L_{HZ}$ ;  $L_{RZU} = L_{RZD} = L_{AZ}$ ;  $Mass_{100}$ :  $L_{AZ} = 100\% L_{HZ}$ ;  $Mass_{60}$ :  $L_{AZ} = 60\% L_{HZ}$ .

<sup>5)</sup>  $GWP_{60}$ : indicative values according to  $L_{AZ} = 60\% L_{HZ}$ . Global Warming Potential data according to the EPD for the EcosheetPile™ Plus product range from EPD International AB (S-P-11071). GWP values may differ according to local EPD regulations. Consult page 61 for more details.

<sup>6)</sup> Excluding inside of interlocks, per system width.

<sup>7)</sup> Available upon request.

<sup>8)</sup> For HZ 630M  $b_{sys} = 2.090$  m

<sup>9)</sup> For HZ 630M  $b_{sys} = 2.524$  m

# AS 500<sup>®</sup> straight web sections

AS 500 straight web sheet piles are designed to form closed cylindrical structures retaining a soil fill. The stability of the cells consisting of a steel envelope and an internal body of soil is guaranteed by their own weight. Straight web sheet piles are mostly used on projects where rock layers are close to ground level or where anchoring would be difficult or impossible. Straight web sheet pile structures are made of circular cells or

diaphragm cells, depending on the site characteristics or the particular requirements of the project. The forces developing in these sheet pile sections are essentially horizontal tensile forces requiring an interlock resistance corresponding to the horizontal force in the web of the pile. AS 500 interlocks comply with EN 10248. Please refer to our brochure "AS 500<sup>®</sup> Straight web steel sheet piles – design & execution manual" for further details.


| Section                     | Nominal width <sup>1)</sup> | Web thickness        | Deviation angle <sup>2)</sup> | Perimeter   | Sectional area  | Mass | Mass per m <sup>2</sup> of wall | Moment of inertia | Section modulus | Coating area <sup>3)</sup> |
|-----------------------------|-----------------------------|----------------------|-------------------------------|-------------|-----------------|------|---------------------------------|-------------------|-----------------|----------------------------|
|                             | <b>b</b>                    | <b>t<sub>w</sub></b> | <b>δ</b>                      | single pile |                 |      |                                 | single pile       |                 |                            |
|                             | mm                          | mm                   | °                             | cm          | cm <sup>2</sup> | kg/m | kg/m <sup>2</sup>               | cm <sup>4</sup>   | cm <sup>3</sup> | m <sup>2</sup> /m          |
| AS 500 - 9.5                | 500                         | 9.5                  | 4.5                           | 138         | 81.3            | 63.8 | 128                             | 168               | 46              | 0.58                       |
| AS 500 - 11.0               | 500                         | 11.0                 | 4.5                           | 139         | 89.4            | 70.2 | 140                             | 186               | 49              | 0.58                       |
| AS 500 - 12.0               | 500                         | 12.0                 | 4.5                           | 139         | 94.6            | 74.3 | 149                             | 196               | 51              | 0.58                       |
| AS 500 - 12.5               | 500                         | 12.5                 | 4.5                           | 139         | 97.2            | 76.3 | 153                             | 201               | 51              | 0.58                       |
| AS 500 - 12.7               | 500                         | 12.7                 | 4.5                           | 139         | 98.2            | 77.1 | 154                             | 204               | 51              | 0.58                       |
| AS 500 - 13.0 <sup>4)</sup> | 500                         | 13.0                 | 4.5                           | 140         | 100.6           | 79.0 | 158                             | 213               | 54              | 0.58                       |

<sup>1)</sup> The effective width to be taken into account for design purposes (layout) is 503 mm for all AS 500 sheet piles.

<sup>2)</sup> Max. deviation angle 4.0° for pile length > 20 m.

<sup>3)</sup> One side, excluding inside of interlocks.

<sup>4)</sup> Please contact ArcelorMittal Sheet Piling for further information.

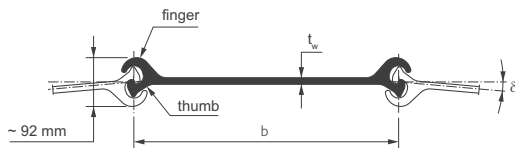

The following characteristic interlock resistance can be guaranteed:

| Section       | $R_{k,s}$ [kN/m] <sup>5)</sup> |
|---------------|--------------------------------|
| AS 500 - 9.5  | 3500                           |
| AS 500 - 11.0 | 4000                           |
| AS 500 - 12.0 | 5000                           |
| AS 500 - 12.5 | 5500                           |
| AS 500 - 12.7 | 5500                           |
| AS 500 - 13.0 | 6000                           |

<sup>5)</sup> For the related steel grade and further information, please contact us. Testing procedure according to Annex C of EN 10248-1:2023.

For AS 500 pile verification, both yield resistance of the web and ultimate resistance of the interlock should be checked.




General cargo berth, Bal Haf, Yemen




Bridge construction, South Korea

## Junction piles and bent piles


Junction piles that join circular cells and intermediary arcs can be provided. Bent piles are pre-bent at the mill. If the deviation angle exceeds  $4.5^\circ$  ( $4.0^\circ$  if  $L > 20$  m), bent piles can be used to set up structures with small radii.

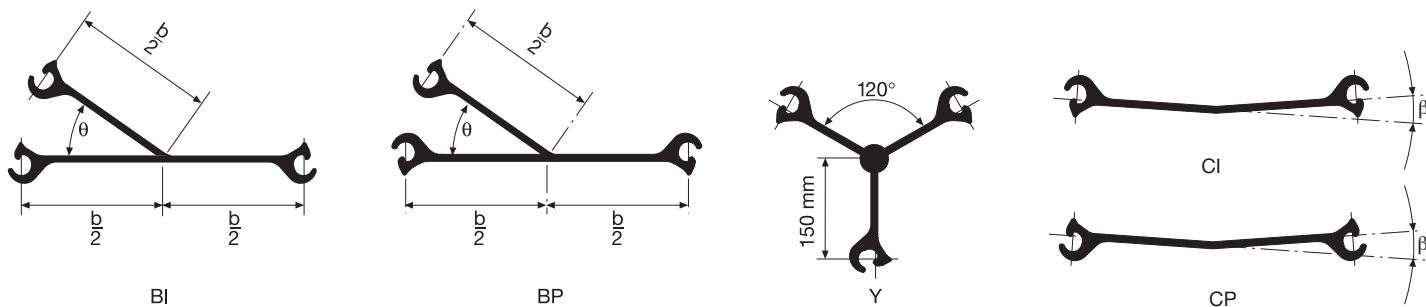

## Types of cells

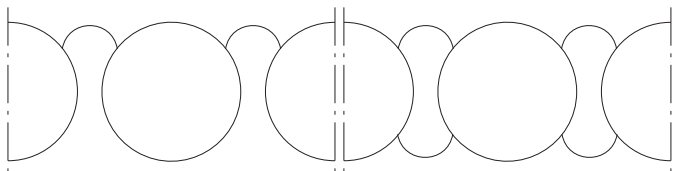

Circular cells with  $35^\circ$  junction piles and one or two connecting arcs.

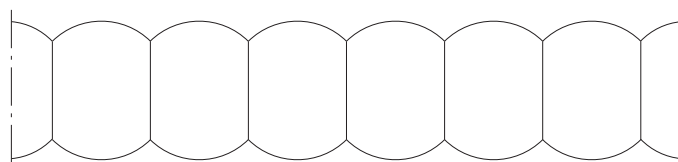

Diaphragm cells with  $120^\circ$  junction piles.



## Circular cell construction



Installation of template



Threading until cell closure



Driving



## Equivalent width

The equivalent width  $w_e$  which is required for stability verification determines the geometry of the chosen cellular construction.

### for circular cells

The equivalent width  $w_e$  is defined as:

$$w_e = \frac{\text{Area within 1 cell} + \text{Area within 1 (or 2) arc(s)}}{\text{System length } x}$$



The ratio  $R_a$  indicates how economical the chosen circular cell will be. It is defined as follows

$$R_a = \frac{\text{Development 1 cell} + \text{Development 1 (or 2) arc(s)}}{\text{System length } x}$$

### for diaphragm cells



The equivalent width  $w_e$  is defined as:

$$w_e = \text{diaphragm wall length (dl)} + 2 \cdot c$$

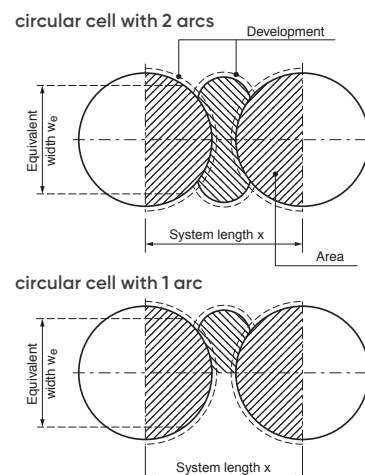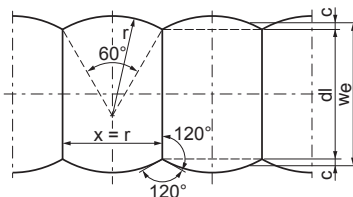

## Geometry of circular cells

Once the equivalent width has been determined, the geometry of the cells can be defined using tables or design software.

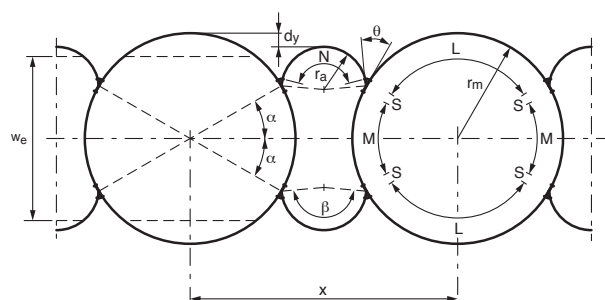



- $r_m$  = radius of the main cell
- $r_a$  = radius of the connecting arcs
- $\theta$  = angle between the main cell and the connecting arc
- $x$  = system length
- $d_y$  = positive or negative offset between the connecting arcs and the tangent planes of the main cells
- $w_e$  = equivalent width

Junction piles with angles  $\theta$  between  $30^\circ$  and  $45^\circ$ , as well as  $\theta = 90^\circ$ , are available on request.

The table below shows a short selection of circular cells with 2 arcs and standard junction piles with  $\theta = 35^\circ$ .

| Nb. of piles per |      |      |      |      |      | Geometrical values |       |       |       |          |         | Interlock deviation |            | Design values |       |
|------------------|------|------|------|------|------|--------------------|-------|-------|-------|----------|---------|---------------------|------------|---------------|-------|
| Cell             |      |      | Arc  |      |      |                    |       |       |       |          |         | Cell                | Arc        | 2 Arcs        |       |
| Total            | L    | M    | S    | N    |      | $d = 2 \cdot r_m$  | $r_a$ | $x$   | $d_y$ | $\alpha$ | $\beta$ | $\delta_m$          | $\delta_a$ | $w_e$         | $R_a$ |
| pcs.             | pcs. | pcs. | pcs. | pcs. | pcs. | m                  | m     | m     | m     | °        | °       | °                   | °          | m             |       |
| 100              | 33   | 15   | 1    | 25   | 150  | 16.01              | 4.47  | 22.92 | 0.16  | 28.80    | 167.60  | 3.60                | 6.45       | 13.69         | 3.34  |
| 104              | 35   | 15   | 1    | 27   | 158  | 16.65              | 4.88  | 24.42 | 0.20  | 27.69    | 165.38  | 3.46                | 5.91       | 14.14         | 3.30  |
| 108              | 37   | 15   | 1    | 27   | 162  | 17.29              | 4.94  | 25.23 | 0.54  | 26.67    | 163.33  | 3.33                | 5.83       | 14.41         | 3.27  |
| 112              | 37   | 17   | 1    | 27   | 166  | 17.93              | 4.81  | 25.25 | 0.33  | 28.93    | 167.86  | 3.21                | 6.00       | 15.25         | 3.35  |
| 116              | 37   | 19   | 1    | 27   | 170  | 18.57              | 4.69  | 25.27 | 0.13  | 31.03    | 172.07  | 3.10                | 6.15       | 16.08         | 3.42  |
| 120              | 39   | 19   | 1    | 29   | 178  | 19.21              | 5.08  | 26.77 | 0.16  | 30.00    | 170.00  | 3.00                | 5.67       | 16.54         | 3.38  |
| 124              | 41   | 19   | 1    | 29   | 182  | 19.85              | 5.14  | 27.59 | 0.50  | 29.03    | 168.06  | 2.90                | 5.60       | 16.82         | 3.35  |
| 128              | 43   | 19   | 1    | 31   | 190  | 20.49              | 5.55  | 29.09 | 0.53  | 28.13    | 166.25  | 2.81                | 5.20       | 17.27         | 3.32  |
| 132              | 43   | 21   | 1    | 31   | 194  | 21.13              | 5.42  | 29.11 | 0.33  | 30.00    | 170.00  | 2.73                | 5.31       | 18.10         | 3.39  |
| 136              | 45   | 21   | 1    | 33   | 202  | 21.77              | 5.82  | 30.61 | 0.36  | 29.12    | 168.24  | 2.65                | 4.95       | 18.56         | 3.35  |
| 140              | 45   | 23   | 1    | 33   | 206  | 22.42              | 5.71  | 30.62 | 0.17  | 30.86    | 171.71  | 2.57                | 5.05       | 19.39         | 3.42  |
| 144              | 47   | 23   | 1    | 33   | 210  | 23.06              | 5.76  | 31.45 | 0.50  | 30.00    | 170.00  | 2.50                | 5.00       | 19.67         | 3.39  |
| 148              | 47   | 25   | 1    | 35   | 218  | 23.70              | 5.99  | 32.13 | 0.00  | 31.62    | 173.24  | 2.43                | 4.81       | 20.67         | 3.44  |
| 152              | 49   | 25   | 1    | 35   | 222  | 24.31              | 6.05  | 32.97 | 0.34  | 30.79    | 171.58  | 2.37                | 4.77       | 20.95         | 3.42  |

Geometry of diaphragm cells

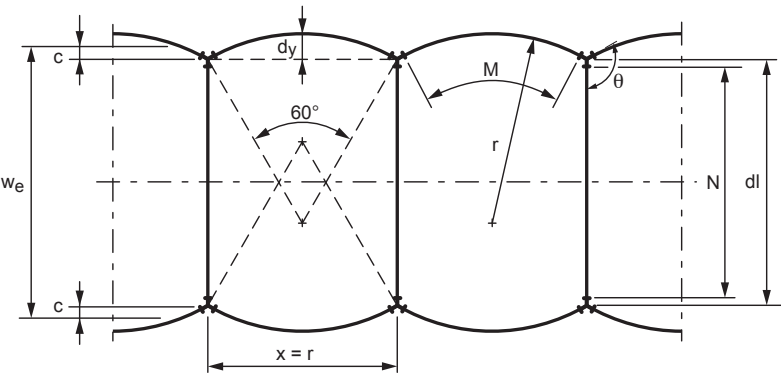

- r = radius
- θ = angle between the arc and the diaphragm
- we = equivalent width, with we = dl+2 · c
- dy = arc height
- dl = diaphragm wall length
- x = system length
- c = equivalent arc height




Geometry diaphragm wall

| Number of piles | Wall length |
|-----------------|-------------|
| N               | dl          |
| pcs.            | m           |
| 11              | 5.83        |
| 13              | 6.84        |
| 15              | 7.85        |
| 17              | 8.85        |
| 19              | 9.86        |
| 21              | 10.86       |
| 23              | 11.87       |
| 25              | 12.88       |
| 27              | 13.88       |
| 29              | 14.89       |
| 31              | 15.89       |
| 33              | 16.90       |
| 35              | 17.91       |
| 37              | 18.91       |
| 39              | 19.92       |
| 41              | 20.92       |
| 43              | 21.93       |
| 45              | 22.94       |
| 47              | 23.94       |
| 49              | 24.95       |
| 51              | 25.95       |
| 53              | 26.96       |
| 55              | 27.97       |
| 57              | 28.97       |
| 59              | 29.98       |


Geometry arc (Standard solution)

| Number of piles | Radius<br>System length | Arc height | Equivalent arc<br>height | Interlock deviation |
|-----------------|-------------------------|------------|--------------------------|---------------------|
| M               | x = r                   | dy         | c                        | δa                  |
| pcs.            | m                       | m          | m                        | °                   |
| 11              | 5.57                    | 0.75       | 0.51                     | 5.17                |
| 13              | 6.53                    | 0.87       | 0.59                     | 4.41                |
| 15              | 7.49                    | 1.00       | 0.68                     | 3.85                |
| 17              | 8.45                    | 1.13       | 0.77                     | 3.41                |
| 19              | 9.41                    | 1.26       | 0.86                     | 3.06                |
| 21              | 10.37                   | 1.39       | 0.94                     | 2.78                |
| 23              | 11.33                   | 1.52       | 1.03                     | 2.54                |
| 25              | 12.29                   | 1.65       | 1.12                     | 2.34                |
| 27              | 13.26                   | 1.78       | 1.20                     | 2.17                |
| 29              | 14.22                   | 1.90       | 1.29                     | 2.03                |
| 31              | 15.18                   | 2.03       | 1.38                     | 1.90                |
| 33              | 16.14                   | 2.16       | 1.46                     | 1.79                |
| 35              | 17.10                   | 2.29       | 1.55                     | 1.69                |
| 37              | 18.06                   | 2.42       | 1.64                     | 1.60                |
| 39              | 19.02                   | 2.55       | 1.73                     | 1.52                |
| 41              | 19.98                   | 2.68       | 1.81                     | 1.44                |
| 43              | 20.94                   | 2.81       | 1.90                     | 1.38                |


# Box piles




Z-box pile



Double U box pile



Triple U box pile



Quadruple U box pile

| Section | Width | Height | Perimeter | Sectional<br>area | Total<br>section | Mass <sup>1)</sup> | Moment of inertia |     | Elastic section<br>modulus |     | Min.<br>radius of<br>gyration | Coating<br>area <sup>2)</sup> |
|---------|-------|--------|-----------|-------------------|------------------|--------------------|-------------------|-----|----------------------------|-----|-------------------------------|-------------------------------|
|         | b     | h      |           |                   |                  |                    | y-y               | z-z | y-y                        | z-z |                               |                               |
|         |       |        |           |                   |                  |                    |                   |     |                            |     |                               |                               |

## CAZ-800 box piles

|                          |      |     |     |     |      |     |        |        |       |       |      |      |
|--------------------------|------|-----|-----|-----|------|-----|--------|--------|-------|-------|------|------|
| CAZ 18-800 <sup>3)</sup> | 1600 | 898 | 438 | 363 | 7340 | 285 | 339470 | 650340 | 7535  | 7915  | 30.6 | 4.16 |
| CAZ 19-800               | 1600 | 899 | 438 | 382 | 7356 | 299 | 355863 | 681764 | 7891  | 8299  | 30.5 | 4.15 |
| CAZ 20-800               | 1600 | 900 | 438 | 400 | 7372 | 314 | 372430 | 713410 | 8250  | 8690  | 30.5 | 4.16 |
| CAZ 22-800               | 1600 | 902 | 439 | 436 | 7404 | 342 | 405710 | 776690 | 8965  | 9465  | 30.5 | 4.16 |
| CAZ 23-800               | 1600 | 948 | 445 | 423 | 7764 | 332 | 447370 | 756450 | 9405  | 9170  | 32.5 | 4.24 |
| CAZ 25-800               | 1600 | 950 | 446 | 460 | 7796 | 361 | 484690 | 820800 | 10170 | 9990  | 32.5 | 4.24 |
| CAZ 27-800               | 1600 | 952 | 446 | 497 | 7829 | 390 | 522220 | 885310 | 10930 | 10750 | 32.4 | 4.24 |

## CAZ-750 box piles

|            |      |      |     |     |      |     |        |        |       |       |      |      |
|------------|------|------|-----|-----|------|-----|--------|--------|-------|-------|------|------|
| CAZ 28-750 | 1500 | 1018 | 445 | 453 | 7829 | 356 | 547100 | 702950 | 10715 | 9080  | 34.8 | 4.23 |
| CAZ 30-750 | 1500 | 1020 | 446 | 490 | 7861 | 385 | 590180 | 758880 | 11535 | 9840  | 34.7 | 4.23 |
| CAZ 32-750 | 1500 | 1022 | 446 | 527 | 7892 | 414 | 633500 | 815060 | 12360 | 10535 | 34.7 | 4.23 |

## CAZ-700 and CAZ-770 box piles

|                  |      |     |     |     |      |     |        |        |       |      |      |      |
|------------------|------|-----|-----|-----|------|-----|--------|--------|-------|------|------|------|
| CAZ 12-770       | 1540 | 687 | 389 | 328 | 5431 | 257 | 175060 | 557990 | 5075  | 6985 | 23.1 | 3.67 |
| CAZ 13-770       | 1540 | 688 | 389 | 344 | 5446 | 270 | 183440 | 584640 | 5310  | 7320 | 23.1 | 3.67 |
| CAZ 14-770       | 1540 | 689 | 390 | 360 | 5461 | 283 | 191840 | 611300 | 5545  | 7655 | 23.1 | 3.67 |
| CAZ 14-770-10/10 | 1540 | 690 | 390 | 376 | 5476 | 295 | 200280 | 637960 | 5780  | 7995 | 23.1 | 3.67 |
| CAZ 12-700       | 1400 | 628 | 360 | 303 | 4524 | 238 | 137770 | 421600 | 4365  | 5785 | 21.3 | 3.39 |
| CAZ 13-700       | 1400 | 630 | 361 | 332 | 4552 | 261 | 150890 | 461210 | 4765  | 6335 | 21.3 | 3.39 |
| CAZ 13-700-10/10 | 1400 | 631 | 361 | 347 | 4565 | 272 | 157530 | 481090 | 4965  | 6610 | 21.3 | 3.39 |
| CAZ 14-700       | 1400 | 632 | 361 | 362 | 4579 | 284 | 164130 | 500820 | 5165  | 6885 | 21.3 | 3.39 |
| CAZ 17-700       | 1400 | 839 | 391 | 330 | 6015 | 259 | 265280 | 457950 | 6300  | 6285 | 28.3 | 3.69 |
| CAZ 18-700       | 1400 | 840 | 391 | 347 | 6029 | 272 | 277840 | 479790 | 6590  | 6590 | 28.3 | 3.69 |
| CAZ 20-700       | 1400 | 842 | 392 | 379 | 6058 | 297 | 303090 | 523460 | 7170  | 7195 | 28.3 | 3.69 |
| CAZ 24-700       | 1400 | 918 | 407 | 436 | 6616 | 342 | 412960 | 596900 | 8965  | 8260 | 30.8 | 3.85 |
| CAZ 26-700       | 1400 | 920 | 407 | 469 | 6645 | 368 | 444300 | 641850 | 9625  | 8900 | 30.8 | 3.85 |
| CAZ 28-700       | 1400 | 922 | 408 | 503 | 6674 | 395 | 475810 | 686880 | 10285 | 9510 | 30.8 | 3.85 |

<sup>1)</sup> The mass of the welds is not taken into account.

<sup>2)</sup> Outside surface, excluding inside of interlocks.

<sup>3)</sup> Available upon request.



| Section | Width | Height | Perimeter | Sectional area | Total section | Mass <sup>1)</sup> | Moment of inertia |                 | Elastic section modulus |                 | Min. radius of gyration | Coating area <sup>2)</sup> |
|---------|-------|--------|-----------|----------------|---------------|--------------------|-------------------|-----------------|-------------------------|-----------------|-------------------------|----------------------------|
|         | b     | h      |           |                |               |                    | y-y               | z-z             | y-y                     | z-z             |                         |                            |
|         | mm    | mm     |           |                |               |                    | cm <sup>4</sup>   | cm <sup>4</sup> | cm <sup>3</sup>         | cm <sup>3</sup> |                         |                            |

### CAZ-700 and CAZ-770 box piles

|             |      |      |     |     |      |     |        |         |       |       |      |      |
|-------------|------|------|-----|-----|------|-----|--------|---------|-------|-------|------|------|
| CAZ 24-700N | 1400 | 918  | 407 | 401 | 6596 | 315 | 397130 | 550030  | 8620  | 7655  | 31.5 | 3.85 |
| CAZ 26-700N | 1400 | 920  | 407 | 434 | 6625 | 341 | 428490 | 594860  | 9280  | 8280  | 31.4 | 3.85 |
| CAZ 28-700N | 1400 | 922  | 408 | 468 | 6654 | 367 | 460020 | 639700  | 9940  | 8905  | 31.4 | 3.85 |
| CAZ 36-700N | 1400 | 998  | 434 | 534 | 7215 | 419 | 627000 | 710770  | 12525 | 9895  | 34.3 | 4.12 |
| CAZ 38-700N | 1400 | 1000 | 435 | 570 | 7245 | 447 | 667900 | 757530  | 13315 | 10550 | 34.2 | 4.12 |
| CAZ 40-700N | 1400 | 1002 | 436 | 606 | 7275 | 476 | 709010 | 804300  | 14105 | 11205 | 34.2 | 4.12 |
| CAZ 42-700N | 1400 | 998  | 433 | 646 | 7267 | 507 | 744440 | 855860  | 14870 | 11915 | 34.0 | 4.11 |
| CAZ 44-700N | 1400 | 1000 | 434 | 682 | 7298 | 535 | 785620 | 902800  | 15660 | 12570 | 33.9 | 4.11 |
| CAZ 46-700N | 1400 | 1002 | 434 | 718 | 7328 | 564 | 827030 | 949760  | 16455 | 13225 | 33.9 | 4.11 |
| CAZ 48-700  | 1400 | 1006 | 435 | 710 | 7346 | 558 | 845530 | 931330  | 16745 | 12965 | 34.5 | 4.13 |
| CAZ 50-700  | 1400 | 1008 | 435 | 746 | 7376 | 586 | 887420 | 977550  | 17540 | 13620 | 34.5 | 4.13 |
| CAZ 52-700  | 1400 | 1010 | 436 | 782 | 7406 | 614 | 929550 | 1023800 | 18335 | 14255 | 34.5 | 4.13 |

### CAZ box piles

|        |      |     |     |     |      |     |        |        |      |      |      |      |
|--------|------|-----|-----|-----|------|-----|--------|--------|------|------|------|------|
| CAZ 18 | 1260 | 760 | 361 | 333 | 4925 | 261 | 222930 | 365500 | 5840 | 5560 | 25.9 | 3.41 |
| CAZ 26 | 1260 | 854 | 377 | 440 | 5566 | 346 | 366820 | 480410 | 8555 | 7385 | 28.9 | 3.57 |

<sup>1)</sup> The mass of the welds is not taken into account.

<sup>2)</sup> Outside surface, excluding inside of interlocks.



Wrocław flood protection system, Poland. © Piotr Siemaszko.

| Section | Width | Height | Perimeter | Sectional area | Total section | Mass <sup>1)</sup> | Moment of inertia |                 | Elastic section modulus |                 | Min. radius of gyration | Coating area <sup>2)</sup> |
|---------|-------|--------|-----------|----------------|---------------|--------------------|-------------------|-----------------|-------------------------|-----------------|-------------------------|----------------------------|
|         | b     | h      |           |                |               |                    | y-y               | z-z             | y-y                     | z-z             |                         |                            |
|         | mm    | mm     |           |                |               |                    | cm <sup>4</sup>   | cm <sup>4</sup> | cm <sup>3</sup>         | cm <sup>3</sup> |                         |                            |

#### CAU double box piles

|          |     |     |     |     |      |       |        |        |      |      |      |      |
|----------|-----|-----|-----|-----|------|-------|--------|--------|------|------|------|------|
| CAU 14-2 | 750 | 451 | 230 | 198 | 2598 | 155.8 | 54400  | 121490 | 2415 | 3095 | 16.6 | 2.04 |
| CAU 16-2 | 750 | 454 | 231 | 220 | 2620 | 172.5 | 62240  | 130380 | 2745 | 3325 | 16.8 | 2.04 |
| CAU 18-2 | 750 | 486 | 239 | 225 | 2888 | 177.0 | 73770  | 142380 | 3035 | 3625 | 18.1 | 2.14 |
| CAU 20-2 | 750 | 489 | 240 | 247 | 2910 | 193.8 | 83370  | 151220 | 3405 | 3850 | 18.4 | 2.14 |
| CAU 23-2 | 750 | 492 | 244 | 260 | 3013 | 204.2 | 94540  | 157900 | 3845 | 4020 | 19.1 | 2.19 |
| CAU 25-2 | 750 | 495 | 245 | 281 | 3034 | 220.8 | 104810 | 166600 | 4235 | 4240 | 19.3 | 2.19 |

#### CU double box piles

|          |     |     |     |     |      |       |        |        |      |      |      |      |
|----------|-----|-----|-----|-----|------|-------|--------|--------|------|------|------|------|
| CU 12-2  | 600 | 403 | 198 | 168 | 1850 | 132.2 | 34000  | 70000  | 1685 | 2205 | 14.2 | 1.72 |
| CU 12S-2 | 600 | 405 | 198 | 181 | 1867 | 142.1 | 36120  | 76410  | 1785 | 2410 | 14.1 | 1.72 |
| CU 18-2  | 600 | 473 | 212 | 196 | 2184 | 153.8 | 58020  | 78300  | 2455 | 2470 | 17.2 | 1.86 |
| CU 22-2  | 600 | 494 | 220 | 219 | 2347 | 172.3 | 73740  | 88960  | 2985 | 2800 | 18.3 | 1.94 |
| CU 28-2  | 600 | 499 | 226 | 259 | 2468 | 203.6 | 96000  | 103560 | 3850 | 3260 | 19.2 | 2.00 |
| CU 32-2  | 600 | 499 | 223 | 291 | 2461 | 228.3 | 108800 | 109200 | 4360 | 3435 | 19.3 | 1.97 |

#### CGU double box piles

|              |     |     |     |     |      |       |        |        |      |      |      |      |
|--------------|-----|-----|-----|-----|------|-------|--------|--------|------|------|------|------|
| CGU 7N-2     | 600 | 348 | 187 | 112 | 1596 | 88.2  | 16510  | 48530  | 950  | 1535 | 12.1 | 1.62 |
| CGU 7S-2     | 600 | 349 | 188 | 118 | 1604 | 92.5  | 18210  | 50630  | 1045 | 1605 | 12.3 | 1.62 |
| CGU 11N-2    | 600 | 359 | 193 | 153 | 1707 | 120.4 | 27670  | 60590  | 1540 | 1915 | 13.4 | 1.67 |
| CGU 14N-2    | 600 | 461 | 205 | 164 | 2079 | 128.6 | 44070  | 65550  | 1910 | 2075 | 16.4 | 1.79 |
| CGU 18N-2    | 600 | 473 | 212 | 196 | 2184 | 153.8 | 58020  | 78300  | 2455 | 2470 | 17.2 | 1.86 |
| CGU 22N-2    | 600 | 494 | 220 | 219 | 2347 | 172.3 | 73740  | 88960  | 2985 | 2800 | 18.3 | 1.94 |
| CGU 28N-2    | 600 | 499 | 226 | 259 | 2468 | 203.6 | 96000  | 103560 | 3850 | 3260 | 19.2 | 2.00 |
| CGU 32N-2    | 600 | 499 | 223 | 291 | 2461 | 228.3 | 108800 | 109200 | 4360 | 3435 | 19.3 | 1.97 |
| CGU 16-400-2 | 400 | 336 | 169 | 158 | 1170 | 123.9 | 25270  | 31900  | 1505 | 1465 | 12.7 | 1.40 |

<sup>1)</sup> The mass of the welds is not taken into account.

<sup>2)</sup> Outside surface, excluding inside of interlocks.



| Section | Width | Height | Perimeter | Sectional area | Total section | Mass <sup>1)</sup> | Moment of inertia |                 | Elastic section modulus |                 | Min. radius of gyration | Coating area <sup>2)</sup> |
|---------|-------|--------|-----------|----------------|---------------|--------------------|-------------------|-----------------|-------------------------|-----------------|-------------------------|----------------------------|
|         | b     | h      |           |                |               |                    | y-y               | z-z             | y-y                     | z-z             |                         |                            |
|         | mm    | mm     |           |                |               |                    | cm <sup>4</sup>   | cm <sup>4</sup> | cm <sup>3</sup>         | cm <sup>3</sup> |                         |                            |

## CAU triple box piles

|          |      |     |     |     |      |       |        |      |      |      |      |
|----------|------|-----|-----|-----|------|-------|--------|------|------|------|------|
| CAU 14-3 | 957  | 908 | 341 | 298 | 6454 | 233.7 | 300330 | 6510 | 6275 | 31.7 | 3.03 |
| CAU 16-3 | 960  | 910 | 342 | 330 | 6486 | 258.7 | 333640 | 7235 | 6955 | 31.8 | 3.03 |
| CAU 18-3 | 1009 | 927 | 355 | 338 | 6886 | 265.5 | 363690 | 7825 | 7205 | 32.8 | 3.17 |
| CAU 20-3 | 1012 | 928 | 356 | 370 | 6919 | 290.7 | 399780 | 8570 | 7900 | 32.9 | 3.17 |
| CAU 23-3 | 1036 | 930 | 361 | 390 | 7073 | 306.3 | 431940 | 9235 | 8340 | 33.3 | 3.24 |
| CAU 25-3 | 1038 | 931 | 364 | 422 | 7106 | 331.3 | 469030 | 9995 | 9035 | 33.3 | 3.24 |

## CU triple box piles

|          |     |     |     |     |      |       |        |      |      |      |      |
|----------|-----|-----|-----|-----|------|-------|--------|------|------|------|------|
| CU 12-3  | 800 | 755 | 293 | 253 | 4431 | 198.3 | 173100 | 4555 | 4325 | 26.2 | 2.54 |
| CU 12S-3 | 802 | 756 | 294 | 271 | 4457 | 213.1 | 186260 | 4890 | 4645 | 26.2 | 2.54 |
| CU 18-3  | 877 | 790 | 315 | 294 | 4931 | 230.7 | 227330 | 5475 | 5185 | 27.8 | 2.76 |
| CU 22-3  | 912 | 801 | 326 | 329 | 5174 | 258.4 | 268440 | 6310 | 5890 | 28.6 | 2.87 |
| CU 28-3  | 938 | 817 | 336 | 389 | 5356 | 305.4 | 330290 | 7720 | 7040 | 29.1 | 2.96 |
| CU 32-3  | 926 | 809 | 331 | 436 | 5345 | 342.4 | 367400 | 8585 | 7935 | 29.0 | 2.92 |

## CGU triple box piles

|           |     |     |     |     |      |       |        |      |      |      |      |
|-----------|-----|-----|-----|-----|------|-------|--------|------|------|------|------|
| CGU 11N-3 | 781 | 730 | 285 | 230 | 4206 | 180.7 | 150670 | 4040 | 3860 | 25.6 | 2.47 |
| CGU 14N-3 | 844 | 781 | 305 | 246 | 4763 | 192.8 | 182730 | 4475 | 4330 | 27.3 | 2.65 |
| CGU 18N-3 | 877 | 790 | 315 | 294 | 4931 | 230.7 | 227330 | 5475 | 5185 | 27.8 | 2.76 |
| CGU 22N-3 | 912 | 801 | 326 | 329 | 5174 | 258.4 | 268440 | 6310 | 5890 | 28.6 | 2.87 |
| CGU 28N-3 | 938 | 817 | 336 | 389 | 5356 | 305.4 | 330290 | 7720 | 7040 | 29.1 | 2.96 |
| CGU 32N-3 | 926 | 809 | 331 | 436 | 5345 | 342.4 | 367400 | 8585 | 7935 | 29.0 | 2.92 |

<sup>1)</sup> The mass of the welds is not taken into account.

<sup>2)</sup> Outside surface, excluding inside of interlocks.





| Section | Width | Height | Perimeter | Sectional area | Total section | Mass <sup>1)</sup> | Moment of inertia |                 | Elastic section modulus |                 | Min. radius of gyration | Coating area <sup>2)</sup> |
|---------|-------|--------|-----------|----------------|---------------|--------------------|-------------------|-----------------|-------------------------|-----------------|-------------------------|----------------------------|
|         | b     | h      |           |                |               |                    | y-y               | z-z             | y-y                     | z-z             |                         |                            |
|         | mm    | mm     |           |                |               |                    | cm <sup>4</sup>   | cm <sup>4</sup> | cm <sup>3</sup>         | cm <sup>3</sup> |                         |                            |

### CAU quadruple box piles

|          |      |      |     |     |       |       |         |       |      |      |
|----------|------|------|-----|-----|-------|-------|---------|-------|------|------|
| CAU 14-4 | 1222 | 1222 | 453 | 397 | 11150 | 311.6 | 692030  | 11325 | 41.7 | 4.02 |
| CAU 16-4 | 1225 | 1225 | 454 | 440 | 11193 | 345.0 | 770370  | 12575 | 41.8 | 4.02 |
| CAU 18-4 | 1258 | 1258 | 471 | 451 | 11728 | 354.0 | 826550  | 13140 | 42.8 | 4.20 |
| CAU 20-4 | 1261 | 1261 | 472 | 494 | 11771 | 387.6 | 910010  | 14430 | 42.9 | 4.20 |
| CAU 23-4 | 1263 | 1263 | 481 | 520 | 11977 | 408.4 | 979870  | 15510 | 43.4 | 4.30 |
| CAU 25-4 | 1266 | 1266 | 482 | 563 | 12020 | 441.6 | 1064910 | 16820 | 43.5 | 4.30 |

### CU quadruple box piles

|          |      |      |     |     |      |       |        |       |      |      |
|----------|------|------|-----|-----|------|-------|--------|-------|------|------|
| CU 12-4  | 1025 | 1025 | 388 | 337 | 7565 | 264.4 | 394000 | 7690  | 34.2 | 3.36 |
| CU 12S-4 | 1027 | 1027 | 389 | 362 | 7598 | 284.1 | 423410 | 8250  | 34.2 | 3.36 |
| CU 18-4  | 1095 | 1095 | 417 | 392 | 8231 | 307.6 | 507240 | 9270  | 36.0 | 3.65 |
| CU 22-4  | 1115 | 1115 | 432 | 439 | 8556 | 344.6 | 593030 | 10635 | 36.8 | 3.80 |
| CU 28-4  | 1120 | 1120 | 445 | 519 | 8799 | 407.2 | 725730 | 12955 | 37.4 | 3.93 |
| CU 32-4  | 1120 | 1120 | 440 | 582 | 8782 | 456.6 | 811100 | 14480 | 37.3 | 3.87 |

### CGU quadruple box piles

|           |      |      |     |     |      |       |        |       |      |      |
|-----------|------|------|-----|-----|------|-------|--------|-------|------|------|
| CGU 11N-4 | 979  | 979  | 379 | 307 | 7254 | 240.9 | 347050 | 7095  | 33.6 | 3.27 |
| CGU 14N-4 | 1081 | 1081 | 404 | 328 | 7997 | 257.1 | 409870 | 7585  | 35.4 | 3.51 |
| CGU 18N-4 | 1095 | 1095 | 417 | 392 | 8231 | 307.6 | 507240 | 9270  | 36.0 | 3.65 |
| CGU 22N-4 | 1115 | 1115 | 432 | 439 | 8556 | 344.6 | 593030 | 10635 | 36.8 | 3.80 |
| CGU 28N-4 | 1120 | 1120 | 445 | 519 | 8799 | 407.2 | 725730 | 12955 | 37.4 | 3.93 |
| CGU 32N-4 | 1120 | 1120 | 440 | 582 | 8782 | 456.6 | 811100 | 14480 | 37.3 | 3.87 |

<sup>1)</sup> The mass of the welds is not taken into account.

<sup>2)</sup> Outside surface, excluding inside of interlocks.



Changxin dry dock, Shanghai, China




Vilanova, Barcelona, Spain

# Jagged walls

## AZ<sup>®</sup> jagged wall

AZ<sup>®</sup> jagged wall: AZ<sup>®</sup> sections threaded in reverse may form arrangements for special applications.

The jagged wall arrangement represents a very economical solution for sealing screens (reduced height, reliable thickness, low driving resistance). Only one type of position of the single sheet piles is needed to form a jagged wall, either POS A or POS B.

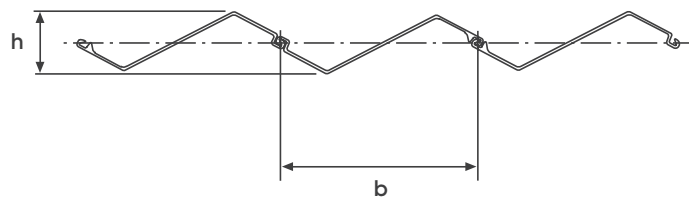

| Section                  | Width | Height | Sectional area     | Mass              | Moment of inertia  | Elastic section modulus | Coating area <sup>1)</sup>     |
|--------------------------|-------|--------|--------------------|-------------------|--------------------|-------------------------|--------------------------------|
|                          | b     | h      |                    |                   |                    |                         |                                |
|                          | mm    | mm     | cm <sup>2</sup> /m | kg/m <sup>2</sup> | cm <sup>4</sup> /m | cm <sup>3</sup> /m      | m <sup>2</sup> /m <sup>2</sup> |
| <b>AZ-800</b>            |       |        |                    |                   |                    |                         |                                |
| AZ 18-800 <sup>2)</sup>  | 897   | 242    | 115                | 90                | 4780               | 395                     | 1.16                           |
| AZ 19-800                | 897   | 243    | 120                | 94                | 5060               | 415                     | 1.16                           |
| AZ 20-800                | 897   | 243    | 126                | 99                | 5340               | 440                     | 1.16                           |
| AZ 22-800                | 897   | 244    | 137                | 107               | 5900               | 485                     | 1.16                           |
| AZ 23-800                | 907   | 255    | 133                | 104               | 6070               | 475                     | 1.17                           |
| AZ 25-800                | 907   | 257    | 144                | 113               | 6670               | 520                     | 1.17                           |
| AZ 27-800                | 907   | 258    | 155                | 122               | 7260               | 565                     | 1.17                           |
| <b>AZ-750</b>            |       |        |                    |                   |                    |                         |                                |
| AZ 28-750                | 881   | 278    | 146                | 114               | 7970               | 575                     | 1.20                           |
| AZ 30-750                | 881   | 280    | 157                | 123               | 8690               | 620                     | 1.20                           |
| AZ 32-750                | 881   | 281    | 169                | 132               | 9420               | 670                     | 1.20                           |
| <b>AZ-700 and AZ-770</b> |       |        |                    |                   |                    |                         |                                |
| AZ 12-770                | 826   | 181    | 112                | 88                | 2320               | 255                     | 1.12                           |
| AZ 13-770                | 826   | 182    | 117                | 92                | 2450               | 270                     | 1.12                           |
| AZ 14-770                | 826   | 182    | 123                | 96                | 2590               | 285                     | 1.12                           |
| AZ 14-770-10/10          | 826   | 183    | 128                | 100               | 2720               | 295                     | 1.12                           |
| AZ 12-700                | 751   | 182    | 115                | 90                | 2400               | 265                     | 1.13                           |
| AZ 13-700                | 751   | 183    | 126                | 99                | 2680               | 295                     | 1.13                           |
| AZ 13-700-10/10          | 751   | 183    | 131                | 103               | 2820               | 305                     | 1.13                           |
| AZ 14-700                | 751   | 184    | 136                | 107               | 2960               | 320                     | 1.13                           |
| AZ 17-700                | 795   | 224    | 117                | 92                | 3690               | 330                     | 1.16                           |
| AZ 18-700                | 795   | 224    | 123                | 96                | 3910               | 350                     | 1.16                           |
| AZ 19-700                | 795   | 225    | 128                | 101               | 4120               | 365                     | 1.16                           |
| AZ 20-700                | 795   | 225    | 134                | 105               | 4340               | 385                     | 1.16                           |
| AZ 24-700                | 813   | 241    | 150                | 118               | 5970               | 495                     | 1.19                           |
| AZ 26-700                | 813   | 242    | 161                | 127               | 6490               | 535                     | 1.19                           |
| AZ 28-700                | 813   | 243    | 172                | 135               | 7020               | 580                     | 1.19                           |

<sup>1)</sup> One side, excluding inside of interlocks.

<sup>2)</sup> Available upon request.

| Section | Width | Height | Sectional area     | Mass              | Moment of inertia  | Elastic section modulus | Coating area <sup>1)</sup>     |
|---------|-------|--------|--------------------|-------------------|--------------------|-------------------------|--------------------------------|
|         | b     | h      |                    |                   |                    |                         |                                |
|         | mm    | mm     | cm <sup>2</sup> /m | kg/m <sup>2</sup> | cm <sup>4</sup> /m | cm <sup>3</sup> /m      | m <sup>2</sup> /m <sup>2</sup> |

### AZ-700 and AZ-770

|            |     |     |     |     |       |      |      |
|------------|-----|-----|-----|-----|-------|------|------|
| AZ 24-700N | 813 | 237 | 141 | 110 | 5580  | 470  | 1.19 |
| AZ 26-700N | 813 | 238 | 152 | 119 | 6100  | 510  | 1.19 |
| AZ 28-700N | 813 | 239 | 163 | 128 | 6630  | 555  | 1.19 |
| AZ 36-700N | 834 | 296 | 181 | 142 | 11900 | 805  | 1.23 |
| AZ 38-700N | 834 | 298 | 193 | 152 | 12710 | 855  | 1.23 |
| AZ 40-700N | 834 | 299 | 205 | 161 | 13530 | 905  | 1.23 |
| AZ 42-700N | 834 | 301 | 217 | 170 | 14730 | 975  | 1.24 |
| AZ 44-700N | 834 | 303 | 229 | 180 | 15550 | 1025 | 1.24 |
| AZ 46-700N | 834 | 304 | 241 | 189 | 16370 | 1075 | 1.24 |
| AZ 48-700  | 836 | 303 | 242 | 190 | 16290 | 1075 | 1.23 |
| AZ 50-700  | 836 | 303 | 253 | 199 | 17100 | 1130 | 1.23 |
| AZ 52-700  | 836 | 305 | 265 | 208 | 17900 | 1175 | 1.23 |

### AZ

|             |     |     |     |     |      |     |      |
|-------------|-----|-----|-----|-----|------|-----|------|
| AZ 18       | 714 | 225 | 133 | 104 | 4280 | 380 | 1.19 |
| AZ 18-10/10 | 714 | 225 | 139 | 109 | 4500 | 400 | 1.19 |
| AZ 26       | 736 | 238 | 169 | 133 | 6590 | 555 | 1.21 |


<sup>1)</sup> One side, excluding inside of interlocks.

Temporary trench, Brenner railway, Austria





## U jagged wall

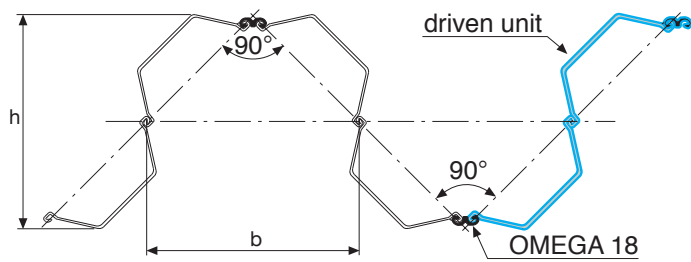

An alternating arrangement of Form S and Form Z double U-sheet piles forming a jagged wall offers economical solutions where high inertia and section modulus are needed. The final choice of section has to include drivability criteria. The mechanical values given below assume that the driven unit is crimped or welded. The OMEGA 18 section is normally threaded and welded at the mill, either by tack weld (no contribution to the section modulus of the jagged wall) or by an appropriately designed weld (full contribution to the section modulus). For walls with an anchorage or strut system, stiffeners have to be provided at the support levels.



| Section | Width | Height | Mass | Moment of inertia <sup>1)</sup> |                    | Elastic section modulus <sup>1)</sup> |                    | Static moment      |                    |
|---------|-------|--------|------|---------------------------------|--------------------|---------------------------------------|--------------------|--------------------|--------------------|
|         | b     | h      |      | without Omega 18                | with Omega 18      | without Omega 18                      | with Omega 18      | without Omega 18   | with Omega 18      |
|         | mm    | mm     |      | cm <sup>4</sup> /m              | cm <sup>4</sup> /m | cm <sup>3</sup> /m                    | cm <sup>3</sup> /m | cm <sup>3</sup> /m | cm <sup>3</sup> /m |

### AU™ jagged wall

|       |      |      |     |        |        |      |      |      |      |
|-------|------|------|-----|--------|--------|------|------|------|------|
| AU 14 | 1135 | 1115 | 153 | 275920 | 334450 | 5080 | 5995 | 3080 | 3625 |
| AU 16 | 1135 | 1115 | 168 | 307090 | 365630 | 5650 | 6555 | 3435 | 3980 |
| AU 18 | 1135 | 1136 | 172 | 329420 | 387960 | 5800 | 6830 | 3595 | 4135 |
| AU 20 | 1135 | 1139 | 187 | 362620 | 421160 | 6370 | 7400 | 3960 | 4505 |
| AU 23 | 1135 | 1171 | 196 | 390770 | 449300 | 6675 | 7675 | 4235 | 4780 |
| AU 25 | 1135 | 1173 | 210 | 424630 | 483170 | 7240 | 8240 | 4610 | 5150 |

### PU® jagged wall

|        |     |      |     |        |        |      |      |      |      |
|--------|-----|------|-----|--------|--------|------|------|------|------|
| PU 12  | 923 | 903  | 163 | 188980 | 235400 | 4275 | 5210 | 2590 | 3125 |
| PU 12S | 923 | 903  | 174 | 202370 | 248810 | 4570 | 5510 | 2770 | 3305 |
| PU 18  | 923 | 955  | 186 | 244470 | 290890 | 5120 | 6095 | 3215 | 3755 |
| PU 22  | 923 | 993  | 206 | 286030 | 332460 | 5760 | 6695 | 3690 | 4230 |
| PU 28  | 923 | 1027 | 240 | 349890 | 396310 | 6810 | 7715 | 4465 | 5000 |
| PU 32  | 923 | 1011 | 267 | 389310 | 435740 | 7705 | 8625 | 5015 | 5550 |

### GU® jagged wall

|        |     |      |     |        |        |      |      |      |      |
|--------|-----|------|-----|--------|--------|------|------|------|------|
| GU 11N | 923 | 903  | 150 | 167340 | 213770 | 3790 | 4735 | 2335 | 2875 |
| GU 14N | 923 | 920  | 159 | 198710 | 245140 | 4320 | 5330 | 2645 | 3180 |
| GU 18N | 923 | 955  | 186 | 244470 | 290890 | 5120 | 6095 | 3215 | 3755 |
| GU 22N | 923 | 993  | 206 | 286030 | 332460 | 5760 | 6695 | 3690 | 4230 |
| GU 28N | 923 | 1027 | 240 | 349890 | 396310 | 6810 | 7715 | 4465 | 5000 |
| GU 32N | 923 | 1011 | 267 | 389310 | 435740 | 7705 | 8625 | 5015 | 5550 |

<sup>1)</sup> The moment of inertia and elastic section moduli assume correct shear force transfer across the interlock on the neutral axis.

# Combined walls


Steel sheet piles can easily be combined to form special arrangements and create systems with large bending resistance:

- box piles / sheet piles;
- HZ®-M king piles / sheet piles;
- tubular king piles / sheet piles.

The primary piles or "king piles" of combined walls can also be used as bearing piles submitted to high vertical loads, e.g. crane loads. The intermediary sheet piles act mainly as soil-retaining and load-transferring elements.

## Equivalent elastic section modulus

The equivalent elastic section modulus  $W_{sys}$  per linear metre of combined wall is based on the assumption that the deflections of king piles and intermediary steel sheet piles are the same, leading to the following formulas:

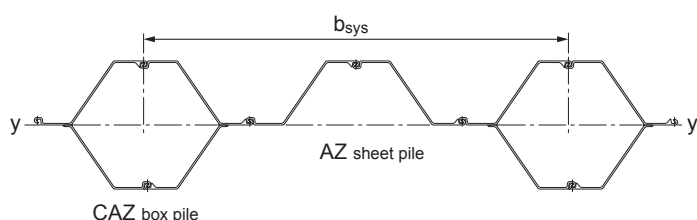

$$I_{sys} = \frac{I_{king\ pile} + I_{ssp}}{b_{sys}}$$

$$W_{sys} = \frac{W_{king\ pile}}{b_{sys}} \cdot \left( \frac{I_{king\ pile} + I_{ssp}}{I_{king\ pile}} \right)$$

|                  |                       |                                              |
|------------------|-----------------------|----------------------------------------------|
| $I_{sys}$        | [cm <sup>4</sup> /m]: | Moment of inertia of combined wall           |
| $W_{sys}$        | [cm <sup>3</sup> /m]: | Elastic section modulus of combined wall     |
| $I_{king\ pile}$ | [cm <sup>4</sup> ]:   | Moment of inertia of king pile               |
| $I_{ssp}$        | [cm <sup>4</sup> ]:   | Moment of inertia of intermediary sheet pile |
| $W_{king\ pile}$ | [cm <sup>3</sup> ]:   | Elastic section modulus of king pile         |
| $b_{sys}$        | [m]:                  | System width                                 |

## CAZ box piles – AZ® sheet piles

| Combination | System width    | Mass <sup>1)</sup>                       |                                         | Moment of inertia               | Elastic section modulus         |
|-------------|-----------------|------------------------------------------|-----------------------------------------|---------------------------------|---------------------------------|
|             | $b_{sys}$<br>mm | Mass <sub>100</sub><br>kg/m <sup>2</sup> | Mass <sub>60</sub><br>kg/m <sup>2</sup> | $I_{sys}$<br>cm <sup>4</sup> /m | $W_{sys}$<br>cm <sup>3</sup> /m |

### AZ-800

|                        |      |     |     |        |      |
|------------------------|------|-----|-----|--------|------|
| CAZ 20-800 / AZ 13-770 | 3140 | 148 | 129 | 129580 | 2870 |
| CAZ 20-800 / AZ 18-700 | 3000 | 156 | 135 | 141780 | 3140 |
| CAZ 20-800 / AZ 20-800 | 3200 | 153 | 131 | 138910 | 3075 |
| CAZ 25-800 / AZ 13-770 | 3140 | 163 | 144 | 165330 | 3470 |
| CAZ 25-800 / AZ 18-700 | 3000 | 171 | 151 | 179200 | 3760 |
| CAZ 25-800 / AZ 20-800 | 3200 | 168 | 146 | 173990 | 3650 |

### AZ-750

|                        |      |     |     |        |      |
|------------------------|------|-----|-----|--------|------|
| CAZ 30-750 / AZ 13-770 | 3040 | 177 | 157 | 205470 | 4015 |
| CAZ 30-750 / AZ 18-700 | 2900 | 185 | 164 | 221760 | 4335 |
| CAZ 30-750 / AZ 20-800 | 3100 | 181 | 158 | 213630 | 4175 |

### AZ-700 and AZ-770

|                        |      |     |     |        |      |
|------------------------|------|-----|-----|--------|------|
| CAZ 13-770 / AZ 13-770 | 3080 | 137 | 117 | 70740  | 2045 |
| CAZ 13-700 / AZ 13-700 | 2800 | 146 | 125 | 64160  | 2025 |
| CAZ 18-700 / AZ 13-770 | 2940 | 144 | 124 | 106220 | 2520 |
| CAZ 18-700 / AZ 13-700 | 2800 | 150 | 129 | 109500 | 2595 |
| CAZ 18-700 / AZ 18-700 | 2800 | 152 | 130 | 118130 | 2800 |

<sup>1)</sup> Mass<sub>100</sub>: L<sub>AZ</sub> = 100% L<sub>box pile</sub>; Mass<sub>60</sub>: L<sub>AZ</sub> = 60% L<sub>box pile</sub>.

## CAZ box piles – AZ<sup>®</sup> sheet piles

| Combination | System width    | Mass <sup>1)</sup>                       |                                         | Moment of inertia               | Elastic section modulus         |
|-------------|-----------------|------------------------------------------|-----------------------------------------|---------------------------------|---------------------------------|
|             | $b_{sys}$<br>mm | Mass <sub>100</sub><br>kg/m <sup>2</sup> | Mass <sub>60</sub><br>kg/m <sup>2</sup> | $I_{sys}$<br>cm <sup>4</sup> /m | $W_{sys}$<br>cm <sup>3</sup> /m |

### AZ-700 and AZ-770

|                         |      |     |     |        |      |
|-------------------------|------|-----|-----|--------|------|
| CAZ 26-700 / AZ 13-770  | 2940 | 177 | 156 | 162840 | 3530 |
| CAZ 26-700 / AZ 13-700  | 2800 | 185 | 163 | 168950 | 3660 |
| CAZ 26-700 / AZ 18-700  | 2800 | 186 | 164 | 177580 | 3845 |
| CAZ 26-700N / AZ 13-770 | 2940 | 168 | 147 | 157460 | 3410 |
| CAZ 26-700N / AZ 13-700 | 2800 | 175 | 154 | 163300 | 3535 |
| CAZ 26-700N / AZ 18-700 | 2800 | 176 | 155 | 171930 | 3725 |
| CAZ 38-700N / AZ 13-770 | 2940 | 204 | 183 | 238890 | 4760 |
| CAZ 38-700N / AZ 13-700 | 2800 | 213 | 192 | 248800 | 4960 |
| CAZ 38-700N / AZ 18-700 | 2800 | 214 | 193 | 257440 | 5130 |
| CAZ 44-700N / AZ 13-770 | 2940 | 234 | 213 | 278930 | 5560 |
| CAZ 44-700N / AZ 13-700 | 2800 | 244 | 223 | 290850 | 5800 |
| CAZ 44-700N / AZ 18-700 | 2800 | 246 | 224 | 299480 | 5970 |
| CAZ 50-700 / AZ 13-770  | 2940 | 251 | 230 | 313560 | 6200 |
| CAZ 50-700 / AZ 18-700  | 2800 | 264 | 242 | 335840 | 6640 |
| CAZ 50-700 / AZ 20-800  | 3000 | 254 | 231 | 319830 | 6320 |

### AZ

|                |      |     |     |        |      |
|----------------|------|-----|-----|--------|------|
| CAZ 18 / AZ 18 | 2520 | 163 | 139 | 105560 | 2765 |
| CAZ 26 / AZ 18 | 2520 | 196 | 173 | 162660 | 3795 |

<sup>1)</sup> Mass<sub>100</sub>: L<sub>AZ</sub> = 100% L<sub>box pile</sub>; Mass<sub>60</sub>: L<sub>AZ</sub> = 60% L<sub>box pile</sub>.



Underground car park, Aalst, Belgium




## U box piles – U sheet piles

Type of reinforcement of standard U sheet piles wall by inserting box piles:

- Heightwise: full or partial height of wall;
- Lengthwise: total length of wall (1/1) or partial length (1/2, 1/3, 1/4).

Please contact our Technical Department for other combinations (e.g. 2/4).

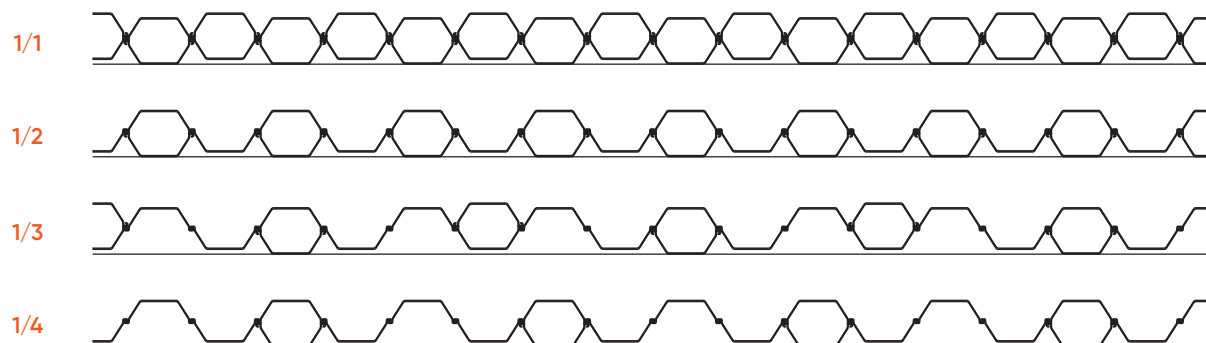

| Section | 1/1                 |                    |                         | 1/2                 |                    |                         | 1/3                 |                    |                         | 1/4                 |                    |                         |
|---------|---------------------|--------------------|-------------------------|---------------------|--------------------|-------------------------|---------------------|--------------------|-------------------------|---------------------|--------------------|-------------------------|
|         | Mass                | Moment of inertia  | Elastic section modulus | Mass                | Moment of inertia  | Elastic section modulus | Mass                | Moment of inertia  | Elastic section modulus | Mass                | Moment of inertia  | Elastic section modulus |
|         | Mass <sub>100</sub> | I <sub>sys</sub>   | W <sub>sys</sub>        | Mass <sub>100</sub> | I <sub>sys</sub>   | W <sub>sys</sub>        | Mass <sub>100</sub> | I <sub>sys</sub>   | W <sub>sys</sub>        | Mass <sub>100</sub> | I <sub>sys</sub>   | W <sub>sys</sub>        |
|         | kg/m <sup>2</sup>   | cm <sup>4</sup> /m | cm <sup>3</sup> /m      | kg/m <sup>2</sup>   | cm <sup>4</sup> /m | cm <sup>3</sup> /m      | kg/m <sup>2</sup>   | cm <sup>4</sup> /m | cm <sup>3</sup> /m      | kg/m <sup>2</sup>   | cm <sup>4</sup> /m | cm <sup>3</sup> /m      |

### CAU box piles / AU™ sheet piles

|       |     |        |      |     |       |      |     |       |      |     |       |      |
|-------|-----|--------|------|-----|-------|------|-----|-------|------|-----|-------|------|
| AU 14 | 208 | 72530  | 3220 | 156 | 40660 | 1805 | 139 | 43300 | 1920 | 130 | 37980 | 1550 |
| AU 16 | 230 | 82990  | 3660 | 173 | 46230 | 2035 | 153 | 49560 | 2185 | 144 | 43440 | 1755 |
| AU 18 | 236 | 98360  | 4045 | 177 | 55020 | 2260 | 157 | 58990 | 2425 | 148 | 51760 | 1950 |
| AU 20 | 258 | 111160 | 4545 | 194 | 61830 | 2525 | 172 | 66680 | 2725 | 162 | 58460 | 2180 |
| AU 23 | 272 | 126050 | 5125 | 204 | 69580 | 2830 | 182 | 75820 | 3080 | 170 | 66410 | 2435 |
| AU 25 | 294 | 139750 | 5645 | 221 | 76800 | 3105 | 196 | 84080 | 3395 | 184 | 73590 | 2675 |

### CU box piles / PU® sheet piles

|        |     |        |      |     |       |      |     |        |      |     |       |      |
|--------|-----|--------|------|-----|-------|------|-----|--------|------|-----|-------|------|
| PU 12  | 220 | 56670  | 2810 | 165 | 32080 | 1590 | 147 | 33290  | 1650 | 138 | 29190 | 1370 |
| PU 12S | 237 | 60200  | 2975 | 178 | 34120 | 1685 | 158 | 35170  | 1735 | 148 | 30830 | 1450 |
| PU 18  | 256 | 96700  | 4090 | 192 | 54370 | 2300 | 171 | 58000  | 2450 | 160 | 50940 | 1980 |
| PU 22  | 287 | 122900 | 4975 | 215 | 68730 | 2785 | 192 | 73940  | 2995 | 180 | 64920 | 2395 |
| PU 28  | 339 | 160000 | 6415 | 255 | 88390 | 3545 | 226 | 96310  | 3860 | 212 | 84370 | 3050 |
| PU 32  | 381 | 181330 | 7270 | 285 | 99790 | 4000 | 254 | 108660 | 4355 | 238 | 95070 | 3445 |

### CGU box piles / GU® sheet piles

|           |     |        |      |     |       |      |     |        |      |     |       |      |
|-----------|-----|--------|------|-----|-------|------|-----|--------|------|-----|-------|------|
| GU 7N     | 147 | 27520  | 1585 | 110 | 15630 | 900  | 98  | 16140  | 930  | 92  | 14160 | 775  |
| GU 7S     | 154 | 30350  | 1740 | 116 | 17150 | 985  | 103 | 17810  | 1020 | 96  | 15610 | 845  |
| GU 11N    | 201 | 46120  | 2570 | 151 | 25790 | 1435 | 134 | 27000  | 1505 | 125 | 23610 | 1235 |
| GU 14N    | 214 | 73440  | 3185 | 161 | 41520 | 1800 | 143 | 44090  | 1915 | 134 | 38760 | 1550 |
| GU 18N    | 256 | 96700  | 4090 | 192 | 54370 | 2300 | 171 | 58000  | 2450 | 160 | 50940 | 1980 |
| GU 22N    | 287 | 122900 | 4975 | 215 | 68730 | 2785 | 192 | 73940  | 2995 | 180 | 64920 | 2395 |
| GU 28N    | 339 | 160000 | 6415 | 255 | 88390 | 3545 | 226 | 96310  | 3860 | 212 | 84370 | 3050 |
| GU 32N    | 381 | 181330 | 7270 | 285 | 99790 | 4000 | 254 | 108660 | 4355 | 238 | 95070 | 3445 |
| GU 16-400 | 310 | 63180  | 3760 | 232 | 35270 | 2100 | 207 | 36110  | 2150 | 194 | 31460 | 1805 |

# Cold formed steel sheet piles

**New standard**  
EN 10249 – 2:2024

Cold formed steel sheet piles have been used for decades in permanent and temporary structures, like waterfront structures, dykes, river embankments and cofferdams. Main applications are small retaining walls, temporary cofferdams requesting low watertightness, anchor walls of quay walls, reinforcement of dykes, river embankments, etc. The installation is quite simple

and fast, and can be performed with standard driving methods, with a reduced driving team as well as usual driving equipment like impact hammers, vibratory hammers or hydraulic presses. Please refer to our brochure "Cold formed steel sheet piles" for detailed information.


## Benefits of cold formed steel sheet piles

- Supplied according to European standard EN 10249
- Steel grades available: S 235 JRC, S 275 JRC and S 355 J0C
- Elastic section modulus range from 112 to 2 470 cm<sup>3</sup>/m
- Constant thickness over the whole section, from 3 mm up to 10 mm (depending on the section)
- High width, reducing handling and installation time
- Reduced height (of some sections) for structures facing space limitations
- Allowable interlock swing up to 10°
- Shear force transfer on neutral axis is guaranteed (important issue for U-type sheet piles)

- Corner section can be supplied with pre-bent fabricated sheet piles
- PAL 32 and PAU 27 are well suited for reuse
- Can be coated or protected according to international standards (for instance EN ISO 12944)
- Application of sealing products in the interlocks
- Several sections in different thicknesses, length and steel grades are stocked, allowing for very short delivery
- Any sheet pile section can be manufactured in thickness increments of 0.1 mm (up to the maximum thickness of the specific section).

## Omega Sections

Omega sections are ideally suited for the execution of continuous walls that require a limited profile height. The 'inversed' interlocks allow for the installation of relatively shallow structures. Their shape has been optimized in order to achieve an excellent section modulus / mass ratio, with elastic section modulus up to 1100 cm<sup>3</sup>/m.

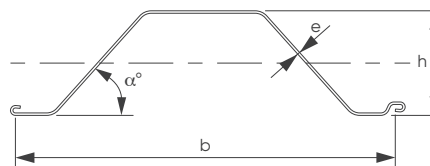

| Section        | Thickness <sup>1)</sup> | Width | Height | Angle | Mass        |                   | Moment of inertia | Elastic section modulus | Static moment | Plastic section modulus | Sectional area | Coating area <sup>2)</sup>    | Class <sup>3)</sup> |           |           |
|----------------|-------------------------|-------|--------|-------|-------------|-------------------|-------------------|-------------------------|---------------|-------------------------|----------------|-------------------------------|---------------------|-----------|-----------|
|                | e <sup>1)</sup>         | b     | h      | α     | single pile | wall              |                   |                         |               |                         |                |                               |                     |           |           |
|                |                         |       |        |       | G           |                   |                   |                         |               |                         |                |                               |                     |           |           |
|                | mm                      | mm    | mm     | °     | kg/m        | kg/m <sup>2</sup> | I                 | W <sub>el</sub>         | S             | W <sub>pl</sub>         | A              | A <sub>Lw</sub> <sup>2)</sup> | S 235 JRC           | S 275 JRC | S 355 JRC |
| Omega Sections |                         |       |        |       |             |                   |                   |                         |               |                         |                |                               |                     |           |           |
| PAL 3030       | 3.0                     | 660   | 89     | 41    | 19.4        | 29.4              | 500               | 112                     | 65            | -                       | 37.5           | 0.80                          | 4                   | 4         | 4         |
| PAL 3040       | 4.0                     | 660   | 90     | 41    | 25.8        | 39.2              | 666               | 147                     | 85            | -                       | 49.9           | 0.80                          | 4                   | 4         | 4         |
| PAL 3050       | 5.0                     | 660   | 91     | 41    | 32.2        | 48.8              | 831               | 181                     | 105           | -                       | 62.2           | 0.80                          | 4                   | 4         | 4         |
| PAL 3130       | 3.0                     | 711   | 125    | 79    | 23.5        | 33.1              | 1244              | 199                     | 110           | -                       | 42.2           | 0.97                          | 4                   | 4         | 4         |
| PAL 3140       | 4.0                     | 711   | 126    | 79    | 31.3        | 44.0              | 1655              | 261                     | 145           | -                       | 56.1           | 0.97                          | 4                   | 4         | 4         |
| PAL 3150       | 5.0                     | 711   | 127    | 79    | 39.0        | 54.9              | 2063              | 322                     | 180           | -                       | 70.0           | 0.97                          | 4                   | 4         | 4         |
| PAL 3260       | 6.0                     | 700   | 149    | 61    | 46.2        | 66.0              | 3096              | 413                     | 245           | -                       | 84.1           | 0.92                          | 4                   | 4         | 4         |
| PAL 3270       | 7.0                     | 700   | 150    | 61    | 53.2        | 76.0              | 3604              | 479                     | 285           | -                       | 96.8           | 0.92                          | 3                   | 3         | 4         |
| PAL 3280       | 8.0                     | 700   | 151    | 61    | 61.6        | 88.0              | 4109              | 545                     | 325           | 624                     | 112.1          | 0.92                          | 2                   | 3         | 3         |
| PAL 3290       | 9.0                     | 700   | 152    | 61    | 70.0        | 100.0             | 4611              | 605                     | 365           | 696                     | 127.4          | 0.92                          | 2                   | 2         | 3         |
| PAU 2240       | 4.0                     | 921   | 252    | 48    | 39.0        | 42.3              | 5101              | 404                     | 240           | -                       | 53.9           | 1.22                          | 4                   | 4         | 4         |
| PAU 2250       | 5.0                     | 921   | 253    | 48    | 48.7        | 52.8              | 6363              | 504                     | 300           | -                       | 67.3           | 1.22                          | 4                   | 4         | 4         |
| PAU 2260       | 6.0                     | 921   | 254    | 48    | 58.3        | 63.3              | 7620              | 600                     | 360           | -                       | 80.7           | 1.22                          | 3                   | 3         | 4         |
| PAU 2440       | 4.0                     | 813   | 293    | 60    | 39.0        | 48.0              | 7897              | 537                     | 320           | -                       | 61.1           | 1.22                          | 4                   | 4         | 4         |
| PAU 2450       | 5.0                     | 813   | 294    | 60    | 48.7        | 59.9              | 9858              | 669                     | 395           | -                       | 76.3           | 1.22                          | 4                   | 4         | 4         |
| PAU 2460       | 6.0                     | 813   | 295    | 60    | 58.3        | 71.8              | 11813             | 801                     | 475           | -                       | 91.4           | 1.22                          | 3                   | 3         | 4         |
| PAU 2760       | 6.0                     | 804   | 295    | 60    | 60.4        | 75.1              | 12059             | 803                     | 495           | -                       | 95.7           | 1.16                          | 3                   | 3         | 4         |
| PAU 2770       | 7.0                     | 804   | 296    | 60    | 70.4        | 87.5              | 14030             | 934                     | 575           | 1136                    | 114.4          | 1.16                          | 2                   | 3         | 3         |
| PAU 2780       | 8.0                     | 804   | 297    | 60    | 80.3        | 99.8              | 15995             | 1063                    | 655           | 1293                    | 127.1          | 1.16                          | 2                   | 2         | 3         |


<sup>1)</sup> Other thicknesses on request.

<sup>2)</sup> Per single pile, one side, excluding inside of interlocks.

<sup>3)</sup> Classification according to EN 1993-5:2007. Class 1 is obtained by verification of the rotation capacity for a class-2-cross-section.

## Z-Sections

PAZ sections are the most “cost-efficient” type of cold formed steel sheet piles. Their large width reduces significantly the installation time at the job site. They are particularly well adapted for reinforcing dams and river or canal banks. Elastic section modulus up to 2 500 cm<sup>3</sup>/m.

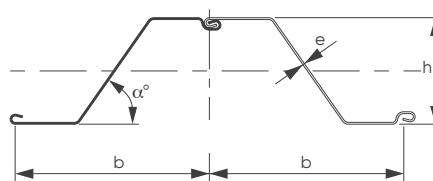

| Section           | Thickness <sup>1)</sup> | Width | Height | Angle | Mass        |                   | Moment of inertia | Elastic section modulus | Static moment | Plastic section modulus | Sectional area | Coating area <sup>2)</sup>    | Class <sup>3)</sup> |           |           |
|-------------------|-------------------------|-------|--------|-------|-------------|-------------------|-------------------|-------------------------|---------------|-------------------------|----------------|-------------------------------|---------------------|-----------|-----------|
|                   | e <sup>1)</sup>         | b     | h      | α     | single pile | wall              |                   |                         |               |                         |                |                               | S 235 JRC           | S 275 JRC | S 355 JRC |
|                   |                         |       |        |       | G           |                   |                   |                         |               |                         |                |                               |                     |           |           |
|                   | mm                      | mm    | mm     | °     | kg/m        | kg/m <sup>2</sup> | I                 | W <sub>el</sub>         | S             | W <sub>pl</sub>         | A              | A <sub>Lw</sub> <sup>2)</sup> |                     |           |           |
| <b>Z-Sections</b> |                         |       |        |       |             |                   |                   |                         |               |                         |                |                               |                     |           |           |
| PAZ 3450          | 5.0                     | 625   | 290    | 39    | 34.2        | 54.7              | 8635              | 596                     | 356           | -                       | 69.6           | 0.76                          | 3                   | 3         | 3         |
| PAZ 3460          | 6.0                     | 625   | 291    | 39    | 40.9        | 65.5              | 10339             | 710                     | 426           | 852                     | 83.4           | 0.76                          | 2                   | 3         | 3         |
| PAZ 3470          | 7.0                     | 625   | 292    | 39    | 47.6        | 76.2              | 12019             | 823                     | 495           | 990                     | 97.0           | 0.76                          | 2                   | 2         | 3         |
| PAZ 4350          | 5.0                     | 770   | 213    | 34    | 38.2        | 49.6              | 4770              | 448                     | 255           | -                       | 63.2           | 0.91                          | 4                   | 4         | 4         |
| PAZ 4360          | 6.0                     | 770   | 214    | 34    | 45.8        | 59.4              | 5720              | 534                     | 310           | -                       | 75.7           | 0.91                          | 4                   | 4         | 4         |
| PAZ 4370          | 7.0                     | 770   | 215    | 34    | 53.3        | 69.2              | 6660              | 619                     | 360           | -                       | 88.2           | 0.91                          | 3                   | 4         | 4         |
| PAZ 4450          | 5.0                     | 725   | 269    | 45    | 37.7        | 52.0              | 8240              | 612                     | 350           | -                       | 66.2           | 0.91                          | 4                   | 4         | 4         |
| PAZ 4460          | 6.0                     | 725   | 270    | 45    | 45.1        | 62.2              | 9890              | 730                     | 415           | -                       | 79.3           | 0.91                          | 4                   | 4         | 4         |
| PAZ 4470          | 7.0                     | 725   | 271    | 45    | 52.4        | 72.3              | 11535             | 846                     | 485           | -                       | 92.1           | 0.91                          | 3                   | 4         | 4         |
| PAZ 4550          | 5.0                     | 676   | 312    | 55    | 37.7        | 55.8              | 12065             | 772                     | 435           | -                       | 71.0           | 0.91                          | 4                   | 4         | 4         |
| PAZ 4560          | 6.0                     | 676   | 313    | 55    | 45.1        | 66.7              | 14444             | 922                     | 520           | -                       | 85.0           | 0.91                          | 4                   | 4         | 4         |
| PAZ 4570          | 7.0                     | 676   | 314    | 55    | 52.4        | 77.5              | 16815             | 1069                    | 610           | -                       | 98.8           | 0.91                          | 3                   | 4         | 4         |
| PAZ 4650          | 5.0                     | 621   | 347    | 65    | 37.7        | 60.7              | 16318             | 940                     | 530           | -                       | 77.3           | 0.91                          | 4                   | 4         | 4         |
| PAZ 4660          | 6.0                     | 621   | 348    | 65    | 45.1        | 72.6              | 19544             | 1122                    | 635           | -                       | 92.5           | 0.91                          | 4                   | 4         | 4         |
| PAZ 4670          | 7.0                     | 621   | 349    | 65    | 52.4        | 84.4              | 22756             | 1302                    | 740           | -                       | 107.5          | 0.91                          | 3                   | 4         | 4         |
| PAZ 5360          | 6.0                     | 857   | 300    | 37    | 54.3        | 63.3              | 11502             | 766                     | 450           | -                       | 80.7           | 1.04                          | 4                   | 4         | 4         |
| PAZ 5370          | 7.0                     | 857   | 301    | 37    | 63.2        | 73.7              | 13376             | 888                     | 520           | -                       | 93.9           | 1.04                          | 3                   | 4         | 4         |
| PAZ 5380          | 8.0                     | 857   | 302    | 37    | 72.1        | 84.0              | 15249             | 1009                    | 595           | -                       | 107.1          | 1.04                          | 3                   | 3         | 4         |
| PAZ 5390          | 9.0                     | 857   | 303    | 37    | 81.0        | 94.4              | 17123             | 1131                    | 665           | -                       | 120.3          | 1.04                          | 3                   | 3         | 3         |
| PAZ 5460          | 6.0                     | 807   | 351    | 45    | 53.9        | 66.8              | 16989             | 968                     | 560           | -                       | 85.1           | 1.04                          | 4                   | 4         | 4         |
| PAZ 5470          | 7.0                     | 807   | 352    | 45    | 62.6        | 77.6              | 19774             | 1123                    | 655           | -                       | 98.9           | 1.04                          | 3                   | 4         | 4         |
| PAZ 5480          | 8.0                     | 807   | 353    | 45    | 71.4        | 88.4              | 22546             | 1277                    | 745           | -                       | 112.7          | 1.04                          | 3                   | 3         | 4         |
| PAZ 5490          | 9.0                     | 807   | 354    | 45    | 80.2        | 99.3              | 25318             | 1431                    | 835           | -                       | 126.5          | 1.04                          | 3                   | 3         | 3         |
| PAZ 54100         | 10.0                    | 808   | 355    | 45    | 89.2        | 110.3             | 27850             | 1570                    | 920           | 1840                    | 140.5          | 1.04                          | 2                   | x         | x         |
| PAZ 5560          | 6.0                     | 743   | 407    | 55    | 53.9        | 72.5              | 25074             | 1233                    | 710           | -                       | 92.4           | 1.04                          | 4                   | 4         | 4         |
| PAZ 5570          | 7.0                     | 743   | 408    | 55    | 62.6        | 84.3              | 29179             | 1432                    | 825           | -                       | 107.4          | 1.04                          | 3                   | 4         | 4         |
| PAZ 5580          | 8.0                     | 744   | 409    | 55    | 71.4        | 96.0              | 33263             | 1628                    | 940           | -                       | 122.3          | 1.04                          | 3                   | 3         | 4         |
| PAZ 5590          | 9.0                     | 744   | 410    | 55    | 80.2        | 107.8             | 37387             | 1825                    | 1060          | -                       | 137.3          | 1.04                          | 3                   | 3         | 3         |
| PAZ 55100         | 10.0                    | 745   | 411    | 55    | 89.2        | 119.8             | 41060             | 2000                    | 1165          | 2330                    | 152.6          | 1.04                          | 2                   | x         | x         |
| PAZ 5660          | 6.0                     | 671   | 451    | 65    | 53.9        | 80.3              | 34340             | 1525                    | 875           | -                       | 102.3          | 1.04                          | 4                   | 4         | 4         |
| PAZ 5670          | 7.0                     | 671   | 452    | 65    | 62.6        | 93.3              | 39954             | 1770                    | 1020          | -                       | 118.9          | 1.04                          | 3                   | 4         | 4         |
| PAZ 5680          | 8.0                     | 672   | 453    | 65    | 71.4        | 106.3             | 45537             | 2013                    | 1160          | -                       | 135.4          | 1.04                          | 3                   | 3         | 4         |
| PAZ 5690          | 9.0                     | 672   | 454    | 65    | 80.2        | 119.3             | 51180             | 2259                    | 1300          | -                       | 151.9          | 1.04                          | 3                   | 3         | 3         |
| PAZ 56100         | 10.0                    | 673   | 455    | 65    | 89.2        | 132.5             | 56200             | 2470                    | 1435          | 2865                    | 168.8          | 1.04                          | 2                   | x         | x         |

<sup>1)</sup> Other thicknesses on request.


<sup>2)</sup> Per single pile, one side, excluding inside of interlocks.

<sup>3)</sup> Classification according to EN 1993-5:2007. Class 1 is obtained by verification of the rotation capacity for a class-2-cross-section.



Trench sheets

Trench sheets are used to form a continuous wall through overlapping. The main types of applications are sewage and drainage works, and in particular, sheeting for small excavations and temporary works. They are indispensable structural elements that provide protection for the job-site personnel working within enclosed areas.

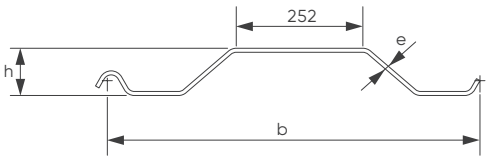

| Section | Thickness <sup>1)</sup> | Width | Height | Mass        |                   | Moment of inertia  | Elastic section modulus | Static moment      | Sectional area     | Coating area <sup>2)</sup> |
|---------|-------------------------|-------|--------|-------------|-------------------|--------------------|-------------------------|--------------------|--------------------|----------------------------|
|         |                         |       |        | single pile | wall              |                    |                         |                    |                    |                            |
|         |                         |       |        | G           |                   | I                  | W <sub>el</sub>         | S                  | A                  | A <sub>Lw</sub>            |
|         | mm                      | mm    | mm     | kg/m        | kg/m <sup>2</sup> | cm <sup>4</sup> /m | cm <sup>3</sup> /m      | cm <sup>3</sup> /m | cm <sup>2</sup> /m | m <sup>2</sup> /m          |

Trench sheets

|        |     |     |    |      |      |      |     |     |      |      |
|--------|-----|-----|----|------|------|------|-----|-----|------|------|
| RC8400 | 4.0 | 742 | 90 | 27.2 | 36.7 | 596  | 132 | 77  | 46.8 | 0.87 |
| RC8500 | 5.0 | 742 | 91 | 34.0 | 45.8 | 745  | 163 | 96  | 58.5 | 0.87 |
| RC8600 | 6.0 | 742 | 92 | 40.9 | 55.1 | 896  | 194 | 116 | 70.2 | 0.87 |
| RC8700 | 7.0 | 742 | 93 | 47.6 | 64.2 | 1045 | 224 | 135 | 81.8 | 0.87 |
| RC8800 | 8.0 | 742 | 94 | 54.2 | 73.0 | 1194 | 254 | 154 | 93.0 | 0.87 |

<sup>1)</sup> Other thicknesses on request.

<sup>2)</sup> One side.





# Delivery form

Omega Sections

Form II standard

Form I on request

Z-Sections

Position A

Position B

Form II standard

Form I on request

# Threading compatibility

| Series | PAL |    |    | PAU |    |    | PAZ |    |    |    |    |    |    |    |
|--------|-----|----|----|-----|----|----|-----|----|----|----|----|----|----|----|
|        | 30  | 31 | 32 | 22  | 24 | 27 | 43  | 44 | 45 | 46 | 53 | 54 | 55 | 56 |
| PAL    | 30  | ✓  | ✓  |     |    |    |     |    |    |    |    |    |    |    |
|        | 31  | ✓  | ✓  |     |    |    |     |    |    |    |    |    |    |    |
|        | 32  |    |    | ✓   |    | ✓  |     |    |    |    | ✓  | ✓  | ✓  | ✓  |
| PAU    | 22  |    |    |     | ✓  | ✓  |     |    |    |    |    |    |    |    |
|        | 24  |    |    |     | ✓  | ✓  |     |    |    |    |    |    |    |    |
|        | 27  |    | ✓  |     |    | ✓  |     |    |    |    | ✓  | ✓  | ✓  | ✓  |
| PAZ    | 43  |    |    |     |    |    | ✓   | ✓  | ✓  | ✓  |    |    |    |    |
|        | 44  |    |    |     |    |    | ✓   | ✓  | ✓  | ✓  |    |    |    |    |
|        | 45  |    |    |     |    |    | ✓   | ✓  | ✓  | ✓  |    |    |    |    |
|        | 46  |    |    |     |    |    | ✓   | ✓  | ✓  | ✓  |    |    |    |    |
|        | 53  |    | ✓  |     |    | ✓  |     |    |    |    | ✓  | ✓  | ✓  | ✓  |
|        | 54  |    | ✓  |     |    | ✓  |     |    |    |    | ✓  | ✓  | ✓  | ✓  |
|        | 55  |    | ✓  |     |    | ✓  |     |    |    |    | ✓  | ✓  | ✓  | ✓  |
|        | 56  |    | ✓  |     |    | ✓  |     |    |    |    | ✓  | ✓  | ✓  | ✓  |




Threading compatibility of PAZ 34 interlocks on request.



# Steel tubes for foundations

ArcelorMittal manufactures spirally welded tubular foundation piles in its mill located in Dintelmond, The Netherlands, with diameters up to 3000 mm, wall thicknesses up to 25 mm, and lengths up to 53 m (without butt-welding). The mill is located on the waterfront and owns a deep-water quay wall. Tubular piles are available in numerous European and US steel grades thanks to ArcelorMittal's worldwide network

of coil producers. Tubes can be coated on the premises on request. The table below gives an overview of steel tubes used in foundations (bearing piles, combined walls, etc). Other dimensions available upon request.



Steel tubes can also be provided with C9 connectors welded on the tube to form combined wall systems<sup>1)</sup>. Tubular piles are the main retaining elements of the combined wall, carrying horizontal loads from soil and water pressures, and vertical loads from the anchors and superstructure.

The intermediary sheet piles (preferably AZ sheet piles) transfer horizontal loads to the tubular piles. Please refer to our brochure **"AZ® sheet piles in combined walls"** for more information on the infill sheet piles. Please refer to our brochure **"Spirally welded steel pipes"** for further details on steel tubes.

| Diameter | Thickness | Moment of inertia | Elastic section modulus | Sectional area  | Mass   |
|----------|-----------|-------------------|-------------------------|-----------------|--------|
| D        | t         | I                 | W                       | A               | G      |
| mm       | mm        | cm <sup>4</sup>   | cm <sup>3</sup>         | cm <sup>2</sup> | kg/m   |
| 914      | 10.0      | 290150            | 6350                    | 284.0           | 222.9  |
| 914      | 12.0      | 345890            | 7570                    | 340.0           | 266.9  |
| 914      | 14.0      | 400890            | 8770                    | 395.8           | 310.7  |
| 1016     | 12.0      | 476980            | 9390                    | 378.5           | 297.1  |
| 1016     | 14.0      | 553190            | 10890                   | 440.7           | 346.0  |
| 1016     | 16.0      | 628480            | 12370                   | 502.7           | 394.6  |
| 1219     | 14.0      | 962070            | 15785                   | 530.0           | 416.0  |
| 1219     | 16.0      | 1094090           | 17950                   | 604.7           | 474.7  |
| 1219     | 18.0      | 1224780           | 20095                   | 679.1           | 533.1  |
| 1422     | 16.0      | 1746590           | 24565                   | 706.7           | 554.8  |
| 1422     | 18.0      | 1956610           | 27520                   | 793.9           | 623.2  |
| 1422     | 20.0      | 2164820           | 30450                   | 880.9           | 691.5  |
| 1524     | 16.0      | 2154930           | 28280                   | 758.0           | 595.0  |
| 1524     | 18.0      | 2414730           | 31690                   | 851.6           | 668.5  |
| 1524     | 20.0      | 2672450           | 35070                   | 945.0           | 741.8  |
| 1626     | 18.0      | 2939310           | 36155                   | 909.3           | 713.8  |
| 1626     | 20.0      | 3253820           | 40020                   | 1009.1          | 792.1  |
| 1626     | 22.0      | 3565970           | 43860                   | 1108.6          | 870.3  |
| 1829     | 18.0      | 4198850           | 45915                   | 1024.1          | 803.9  |
| 1829     | 20.0      | 4650060           | 50850                   | 1136.6          | 892.3  |
| 1829     | 22.0      | 5098250           | 55750                   | 1248.9          | 980.4  |
| 2032     | 20.0      | 6397590           | 62970                   | 1264.2          | 992.4  |
| 2032     | 22.0      | 7016540           | 69060                   | 1389.2          | 1090.5 |
| 2032     | 24.0      | 7631750           | 75115                   | 1514.0          | 1188.5 |
| 2540     | 21.0      | 13182380          | 103800                  | 1661.9          | 1304.6 |
| 2540     | 23.0      | 14403690          | 113415                  | 1818.7          | 1427.7 |
| 2540     | 25.0      | 15619130          | 122985                  | 1975.3          | 1550.6 |
| 2845     | 21.0      | 18573651          | 130570                  | 1863.1          | 1462.5 |
| 2845     | 23.0      | 20299605          | 142704                  | 2039.1          | 1600.7 |
| 2845     | 25.0      | 22018177          | 154785                  | 2214.8          | 1738.6 |

<sup>1)</sup> **Disclaimer:** ArcelorMittal Sheet Piling highly recommends that Z or U sections used in tube combined walls as infill sheet piles are threaded with C9 connectors. Infill sheet piles threaded to C9 connectors are a proven solution with respect to optimum interlock fitting. In the event of use of a connector other than the C9, ArcelorMittal Commercial RPS S.à r.l. cannot be held liable for any related failure during construction such as and not limited to, increased friction during driving or declutching.



# Driving caps

A driving cap is a very important accessory, providing efficient energy transfer between the hammer and the sheet pile section, thus preventing damage to the pile. Impact hammers need special driving caps. Driving caps for diesel hammers are generally made of cast steel, with an arrangement of guiding grooves for the different sheet pile sections on its lower side.

A dolly is fitted into a recess on the top of the driving cap. Dollies are normally made of wooden or plastic components or a combination of several different elements.

Each driving cap fits for several sheet pile sections, thus the number of required driving caps for a given sheet pile range is reduced.


## Driving cap dimensions

| Driving caps                | A    | B    | H   | C   | D   | Mass | Dimensions of dolly recess | Corresponding sliding guide |
|-----------------------------|------|------|-----|-----|-----|------|----------------------------|-----------------------------|
|                             | mm   | mm   | mm  | mm  | mm  | kg   | a/b/h or ø/h               |                             |
| AUS 14-26                   | 740  | 580  | 370 | 350 | 305 | 650  | 500/300/120                | 500/90                      |
| AUD 12-16                   | 1540 | 750  | 520 | 430 | 385 | 1900 | 600/400/170                | 700/90                      |
| AUD 20-32                   | 1570 | 750  | 520 | 430 | 385 | 2100 | 600/400/170                | 700/90                      |
| PUS                         | 680  | 600  | 320 | 290 | 265 | 300  | 380/380/120                | 330/50                      |
| US-B                        | 680  | 600  | 320 | 290 | 265 | 300  | 380/380/120                | 330/50                      |
| UD 1                        | 1250 | 610  | 420 | 260 | 350 | 1000 | ø 400/170                  | 30 <sup>2)</sup>            |
| UD 2                        | 1250 | 720  | 420 | 315 | 405 | 1250 | ø 500/170                  | 30 <sup>2)</sup>            |
| PUD 17-33                   | 1250 | 720  | 420 | 315 | 405 | 1250 | ø 500/170                  | 30 <sup>2)</sup>            |
| A 18/26                     | 1160 | 660  | 420 | 390 | 345 | 1150 | 600/400/170                | 500/90                      |
| AZD 12-14                   | 1300 | 590  | 520 | 360 | 315 | 1700 | 600/300/170                | 700/90                      |
| AZD 12-14 L                 | 1440 | 590  | 520 | 360 | 315 | 1750 | 600/300/170                | 700/90                      |
| UZD 14-28                   | 1300 | 705  | 520 | 420 | 375 | 1900 | 600/400/170                | 700/90                      |
| AZD 17-28                   | 1300 | 705  | 520 | 420 | 375 | 1950 | 600/400/170                | 700/91                      |
| AZD 36-40                   | 1320 | 750  | 520 | 440 | 395 | 2050 | 600/400/170                | 700/90                      |
| ZD 800 A                    | 1500 | 955  | 420 | 495 | 450 | 2450 | ø 600/170                  | 700/90                      |
| ZD 800 B                    | 1360 | 1065 | 540 | 560 | 515 | 3000 | ø 600/170                  | 700/90                      |
| ZD 800 A-weld <sup>1)</sup> | 1510 | 702  | 400 | 420 | 375 | 1500 | 600/400/120                | 500/90                      |
| ZD 800 B-weld <sup>1)</sup> | 1400 | 738  | 430 | 438 | 393 | 1650 | 600/400/120                | 500/90                      |
| HS 8 -11                    | 720  | 1270 | 430 | 710 | 665 | 1250 | ø 600/170                  | 500/90                      |
| HD 6 -11                    | 840  | 1410 | 470 | 770 | 725 | 2350 | ø 600/170                  | 700/90                      |


<sup>1)</sup> Availability and product details to be checked with technical department.

<sup>2)</sup> Refers to Type 2 drawing.

Type 1

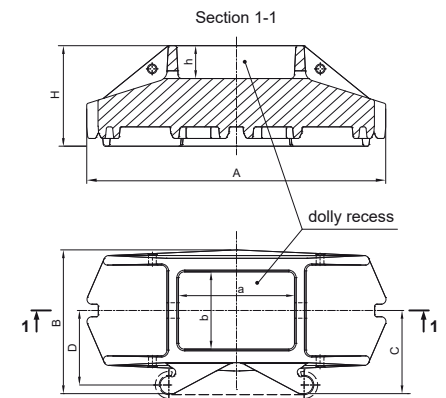


Type 2




## Driving caps - Examples


Section 1-1 (UZD 14-28) [mm]




Plan view [mm]

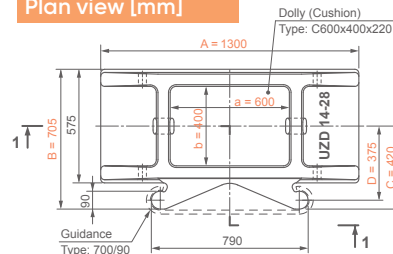


Bottom view




Section 1-1 (PUD 17-33) [mm]



Plan view [mm]



Bottom view



## Sheet pile sections and corresponding driving caps




| Arrangement                | D         | D           | D         | D         | D         | D       | D        | D        | S         | D/B       | D/B       | S   | S    | D/T/B           | D/T/B | D/B       | S               | D               |
|----------------------------|-----------|-------------|-----------|-----------|-----------|---------|----------|----------|-----------|-----------|-----------|-----|------|-----------------|-------|-----------|-----------------|-----------------|
| Sections                   | AZD 12-14 | AZD 12-14 L | UZD 14-28 | AZD 17-28 | AZD 36-40 | A 18/26 | ZD 800 A | ZD 800 B | AUS 14-26 | AUD 12-16 | AUD 20-32 | PUS | US-B | UD 1            | UD 2  | PUD 17-33 | HS 8 -11        | HD 6 -11        |
| <b>AZ®-800</b>             |           |             |           |           |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 18-800                  |           |             |           |           |           |         |          | ✓        | ✓         | ✓         |           |     |      |                 |       |           |                 |                 |
| AZ 19-800                  |           |             |           |           |           |         |          | ✓        | ✓         | ✓         |           |     |      |                 |       |           |                 |                 |
| AZ 20-800                  |           |             |           |           |           |         |          | ✓        |           |           | ✓         |     |      |                 |       |           |                 |                 |
| AZ 22-800                  |           |             |           |           |           |         |          | ✓        |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 23-800                  |           |             |           |           |           |         |          | ✓        | ✓         |           |           |     |      |                 |       |           |                 |                 |
| AZ 25-800                  |           |             |           |           |           |         |          | ✓        | ✓         |           |           |     |      |                 |       |           |                 |                 |
| AZ 27-800                  |           |             |           |           |           |         |          | ✓        | ✓         |           |           |     |      |                 |       |           |                 |                 |
| <b>AZ®-750</b>             |           |             |           |           |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 28-750                  |           |             |           |           |           |         |          | ✓        |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 30-750                  |           |             |           |           |           |         |          | ✓        |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 32-750                  |           |             |           |           |           |         |          | ✓        |           |           |           |     |      |                 |       |           |                 |                 |
| <b>AZ®-700 and AZ®-770</b> |           |             |           |           |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 12-770                  |           | ✓           |           |           |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 13-770                  |           | ✓           |           |           |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 14-770                  |           | ✓           |           |           |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 14-770-10/10            |           | ✓           |           |           |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 12-700                  | ✓         |             |           |           |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 13-700                  | ✓         |             |           |           |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 13-700-10/10            | ✓         |             |           |           |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 14-700                  | ✓         |             |           |           |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 17-700                  |           |             | ✓         | ✓         |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 18-700                  |           |             | ✓         | ✓         |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 19-700                  |           |             | ✓         | ✓         |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 20-700                  |           |             | ✓         | ✓         |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 24-700 / AZ 24-700N     |           |             | ✓         | ✓         |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 26-700 / AZ 26-700N     |           |             | ✓         | ✓         |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 28-700 / AZ 28-700N     |           |             | ✓         | ✓         |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 36-700N                 |           |             |           |           | ✓         |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 38-700N                 |           |             |           |           | ✓         |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 40-700N                 |           |             |           |           | ✓         |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 42-700N                 |           |             |           |           | ✓         |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 44-700N                 |           |             |           |           | ✓         |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 46-700N                 |           |             |           |           | ✓         |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 48-700                  |           |             |           |           | ✓         |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 50-700                  |           |             |           |           | ✓         |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 52-700                  |           |             |           |           | ✓         |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| <b>AZ®</b>                 |           |             |           |           |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 18                      |           |             |           |           |           |         |          | ✓        |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 18-10/10                |           |             |           |           |           |         |          | ✓        |           |           |           |     |      |                 |       |           |                 |                 |
| AZ 26                      |           |             |           |           |           |         |          | ✓        |           |           |           |     |      |                 |       |           |                 |                 |
| <b>AU™</b>                 |           |             |           |           |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AU 14                      | ✓         | ✓           |           |           |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AU 16                      | ✓         | ✓           |           |           |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AU 18                      | ✓         |             | ✓         |           |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AU 20                      | ✓         |             | ✓         |           |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AU 23                      | ✓         |             | ✓         |           |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| AU 25                      | ✓         |             | ✓         |           |           |         |          |          |           |           |           | ✓   |      |                 |       |           |                 |                 |
| <b>PU®</b>                 |           |             |           |           |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| PU 12                      |           |             |           |           |           |         |          |          |           |           |           | ✓   | ✓    | ✓               |       |           |                 |                 |
| PU 12S                     |           |             |           |           |           |         |          |          |           |           |           | ✓   | ✓    | ✓               |       |           |                 |                 |
| PU 18 <sup>-1</sup>        |           |             |           |           |           |         |          |          |           |           |           | ✓   |      |                 | ✓     | ✓         |                 |                 |
| PU 18                      |           |             |           |           |           |         |          |          |           |           |           | ✓   |      |                 | ✓     | ✓         |                 |                 |
| PU 18 <sup>+1</sup>        |           |             |           |           |           |         |          |          |           |           |           | ✓   |      |                 | ✓     | ✓         |                 |                 |
| PU 22 <sup>-1</sup>        |           |             |           |           |           |         |          |          |           |           |           | ✓   |      |                 | ✓     | ✓         |                 |                 |
| PU 22                      |           |             |           |           |           |         |          |          |           |           |           | ✓   |      |                 | ✓     | ✓         |                 |                 |
| PU 22 <sup>+1</sup>        |           |             |           |           |           |         |          |          |           |           |           | ✓   |      |                 | ✓     | ✓         |                 |                 |
| PU 28 <sup>-1</sup>        |           |             |           |           |           |         |          |          |           |           |           | ✓   | ✓    |                 |       | ✓         |                 |                 |
| PU 28                      |           |             |           |           |           |         |          |          |           |           |           | ✓   | ✓    |                 |       | ✓         |                 |                 |
| PU 28 <sup>+1</sup>        |           |             |           |           |           |         |          |          |           |           |           | ✓   | ✓    |                 |       | ✓         |                 |                 |
| PU 32 <sup>-1</sup>        |           |             |           |           |           |         |          |          |           |           |           | ✓   | ✓    |                 | ✓     | ✓         |                 |                 |
| PU 32                      |           |             |           |           |           |         |          |          |           |           |           | ✓   | ✓    |                 | ✓     | ✓         |                 |                 |
| PU 32 <sup>+1</sup>        |           |             |           |           |           |         |          |          |           |           |           | ✓   | ✓    |                 | ✓     | ✓         |                 |                 |
| <b>GU®</b>                 |           |             |           |           |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| GU 6N                      |           |             |           |           |           |         |          |          |           |           |           | ✓   | ✓    | ✓ <sup>1)</sup> |       |           |                 |                 |
| GU 7N                      |           |             |           |           |           |         |          |          |           |           |           | ✓   | ✓    | ✓ <sup>1)</sup> |       |           |                 |                 |
| GU 7S                      |           |             |           |           |           |         |          |          |           |           |           | ✓   | ✓    | ✓ <sup>1)</sup> |       |           |                 |                 |
| GU 7HWS                    |           |             |           |           |           |         |          |          |           |           |           | ✓   | ✓    | ✓ <sup>1)</sup> |       |           |                 |                 |
| GU 8N                      |           |             |           |           |           |         |          |          |           |           |           | ✓   | ✓    | ✓ <sup>1)</sup> |       |           |                 |                 |
| GU 8S                      |           |             |           |           |           |         |          |          |           |           |           | ✓   | ✓    | ✓ <sup>1)</sup> |       |           |                 |                 |
| GU 10N                     |           |             |           |           |           |         |          |          |           |           |           | ✓   | ✓    | ✓               |       |           |                 |                 |
| GU 11N                     |           |             |           |           |           |         |          |          |           |           |           | ✓   | ✓    | ✓               |       |           |                 |                 |
| GU 12N                     |           |             |           |           |           |         |          |          |           |           |           | ✓   | ✓    | ✓               |       |           |                 |                 |
| GU 13N                     |           |             |           |           |           |         |          |          |           |           |           | ✓   |      |                 | ✓     | ✓         |                 |                 |
| GU 14N                     |           |             |           |           |           |         |          |          |           |           |           | ✓   |      |                 | ✓     | ✓         |                 |                 |
| GU 15N                     |           |             |           |           |           |         |          |          |           |           |           | ✓   |      |                 | ✓     | ✓         |                 |                 |
| GU 16N                     |           |             |           |           |           |         |          |          |           |           |           | ✓   |      |                 | ✓     | ✓         |                 |                 |
| GU 18N                     |           |             |           |           |           |         |          |          |           |           |           | ✓   |      |                 | ✓     | ✓         |                 |                 |
| GU 20N                     |           |             |           |           |           |         |          |          |           |           |           | ✓   |      |                 | ✓     | ✓         |                 |                 |
| GU 21N                     |           |             |           |           |           |         |          |          |           |           |           | ✓   |      |                 | ✓     | ✓         |                 |                 |
| GU 22N                     |           |             |           |           |           |         |          |          |           |           |           | ✓   |      |                 | ✓     | ✓         |                 |                 |
| GU 23N                     |           |             |           |           |           |         |          |          |           |           |           | ✓   |      |                 | ✓     | ✓         |                 |                 |
| GU 27N                     |           |             |           |           |           |         |          |          |           |           |           | ✓   |      |                 |       | ✓         |                 |                 |
| GU 28N                     |           |             |           |           |           |         |          |          |           |           |           | ✓   |      |                 |       | ✓         |                 |                 |
| GU 30N                     |           |             |           |           |           |         |          |          |           |           |           | ✓   |      |                 |       | ✓         |                 |                 |
| GU 31N                     |           |             |           |           |           |         |          |          |           |           |           | ✓   | ✓    |                 | ✓     | ✓         |                 |                 |
| GU 32N                     |           |             |           |           |           |         |          |          |           |           |           | ✓   | ✓    |                 | ✓     | ✓         |                 |                 |
| GU 33N                     |           |             |           |           |           |         |          |          |           |           |           | ✓   | ✓    |                 | ✓     | ✓         |                 |                 |
| <b>HZ®-M</b>               |           |             |           |           |           |         |          |          |           |           |           |     |      |                 |       |           |                 |                 |
| HZ 630M                    |           |             |           |           |           |         |          |          |           |           |           |     |      |                 |       |           | ✓ <sup>2)</sup> | ✓ <sup>2)</sup> |
| HZ 880M                    |           |             |           |           |           |         |          |          |           |           |           |     |      |                 |       |           | ✓               | ✓               |
| HZ 1080M                   |           |             |           |           |           |         |          |          |           |           |           |     |      |                 |       |           | ✓               | ✓               |
| HZ 1180M                   |           |             |           |           |           |         |          |          |           |           |           |     |      |                 |       |           | ✓               | ✓               |

<sup>1)</sup> Not fitting for box piles.<sup>2)</sup> On request.


S = Single pile  
D = Double pile  
T = Triple pile  
B = Box pile

## Sliding guides

Sliding guides are designed to guide the driving cap along the leader, thus guaranteeing proper alignment of the hammer in the centre of the driving cap. Their adaptation to the leader is normally carried out on-site.
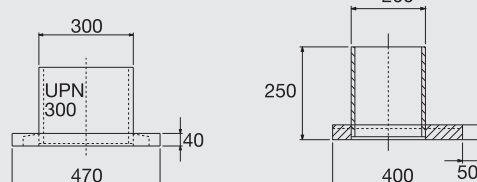
| Dimensions                                                                          | Designation | Corresponding driving caps                            |
|-------------------------------------------------------------------------------------|-------------|-------------------------------------------------------|
|    | 330/50      | PUS<br>US-B                                           |
|    | 30          | UD<br>PUD                                             |
|   | 500/90      | A<br>AUS<br>ZD 800 A-weld<br>ZD 800 B-weld<br>HS 8-11 |
|  | 700/90      | AUD<br>AZD<br>ZD 800 A<br>ZD 800 B<br>UZD<br>HD 6-11  |

## Arrangement of driving caps

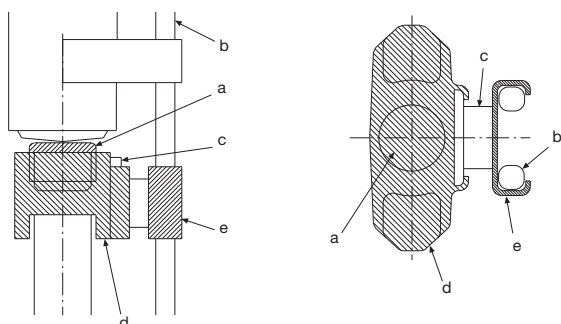

a = dolly/cushion  
b = leader  
c = sliding guide  
d = driving cap  
e = leader slide

The leader slide (e) is not provided by ArcelorMittal.





# HP piles

HP piles are special H-shaped bearing piles with webs and flanges of the same thickness. They are used as bearing piles for foundation projects such as bridges and industrial facilities or as anchoring piles for quay or excavation walls.


HP piles have the following common characteristics:

- guaranteed pile integrity after installation.
- No length limitations due to trimming or splicing;
- easy to store, handle and install.
- Easy connection to superstructure;

HP bearing piles range from HP 200 to HP 400. They are available in structural steel grades (yield strength 235 – 355 MPa) as well as in high-strength steel grades (yield strength 355 – 460 MPa), including HISTAR® quality.

Rolling tolerances on dimensions, shape, weight and length are fixed in accordance with EN 10034.

- bearing capacity available right after installation, capacity can be determined during installation;
- excellent durability. Corrosion rates of embedded HP piles are extremely low;
- HP piles are able to take high tensile and bending forces.



Minimum delivery length is 8 m, maximum delivery length is 24.1 m for HP 200/220/260 and 33.0 m for HP 305/320/360/400.

The table below shows a selection of available piles.

**Please refer to the brochure "Wide flange bearing piles" for detailed information on the entire HP range.**

| Section      | Mass | Dimensions |     |                |                | Sectional area  | Total area                                  | Perimeter | Moment of inertia |                 | Elastic section modulus |                 |
|--------------|------|------------|-----|----------------|----------------|-----------------|---------------------------------------------|-----------|-------------------|-----------------|-------------------------|-----------------|
|              |      | h          | b   | t <sub>w</sub> | t <sub>f</sub> |                 |                                             |           | y-y               | z-z             | y-y                     | z-z             |
|              | kg/m | mm         | mm  | mm             | mm             | cm <sup>2</sup> | A <sub>tot</sub> = h • b<br>cm <sup>2</sup> | m         | cm <sup>4</sup>   | cm <sup>4</sup> | cm <sup>3</sup>         | cm <sup>3</sup> |
| HP 200 x 43  | 42.5 | 200        | 205 | 9.0            | 9.0            | 54.1            | 410                                         | 1.18      | 3888              | 1294            | 389                     | 126             |
| HP 220 x 57  | 57.2 | 210        | 225 | 11.0           | 11.0           | 72.9            | 472                                         | 1.27      | 5729              | 2079            | 546                     | 185             |
| HP 260 x 75  | 75.0 | 249        | 265 | 12.0           | 12.0           | 95.5            | 660                                         | 1.49      | 10650             | 3733            | 855                     | 282             |
| HP 305 x 110 | 110  | 308        | 311 | 15.3           | 15.4           | 140             | 955                                         | 1.80      | 23560             | 7709            | 1531                    | 496             |
| HP 320 x 117 | 117  | 311        | 308 | 16.0           | 16.0           | 150             | 958                                         | 1.78      | 25480             | 7815            | 1638                    | 508             |
| HP 360 x 152 | 152  | 356        | 376 | 17.8           | 17.9           | 194             | 1338                                        | 2.15      | 43970             | 15880           | 2468                    | 845             |
| HP 400 x 213 | 213  | 368        | 400 | 24.0           | 24.0           | 271             | 1472                                        | 2.26      | 63920             | 25640           | 3474                    | 1282            |

t<sub>w</sub> = t<sub>web</sub> = web thickness

t<sub>f</sub> = t<sub>flange</sub> = flange thickness



# Durability of steel sheet piles


Unprotected steel in the atmosphere, water or soil is subject to corrosion that may lead to damage. Local weakening and rusting-through are normally considered to be maintenance problems that can be remedied locally.

Depending on life-time requirements and accessibility to the structure, the service life of a steel structure can be achieved by one or a combination of following methods:

- protection by coating (typically only in high corrosion zones);
- use of a stronger section or a higher steel grade to create a “structural design reserve”;


- use of Marine Grade Steel ASTM A690 (splash zone);
- avoiding important bending moments in the high corrosion zones;
- extension of the concrete capping beam below the low-water level;
- cathodic protection by impressed current or by sacrificial anodes (protects the surface constantly in contact with water);
- use of AMLoCor® steel grade (permanent immersion zone and low water zone).

## Corrosion rates

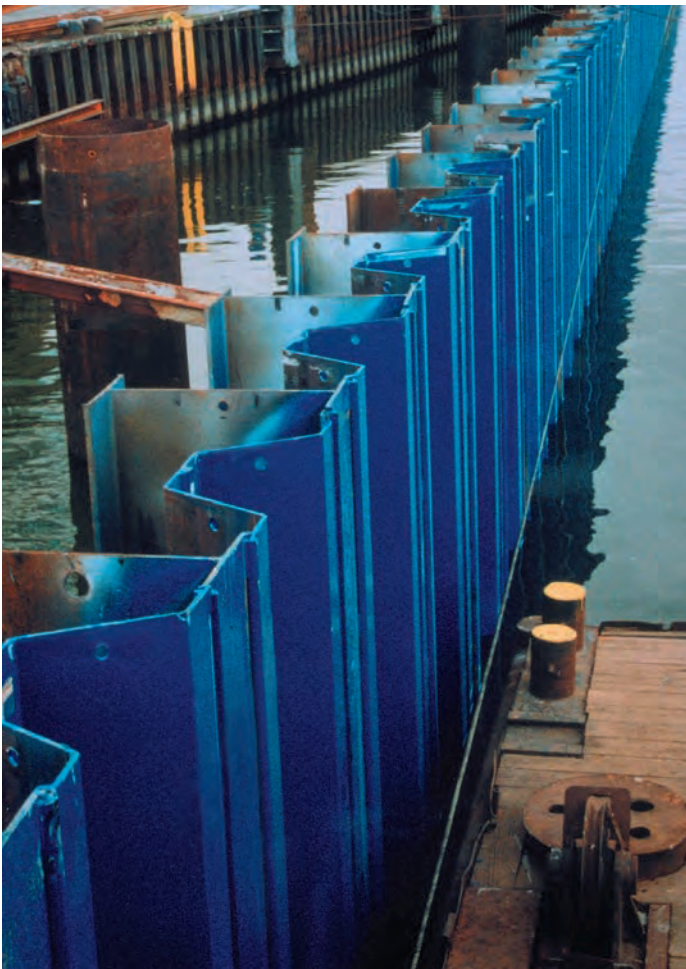

The maximum steel stress in most maritime sheet pile structures is situated within the permanent immersion zone. The loss of thickness in this zone is considerably lower than in the high corrosion zones. Steel stress is generally very low in the maximum corrosion zones: splash zone & low water zone. These locations are therefore not the critical part of the structure despite their negative appearance if unprotected.

Typical loss of thickness due to corrosion and moment distribution for anchored sheet pile wall in marine environment:

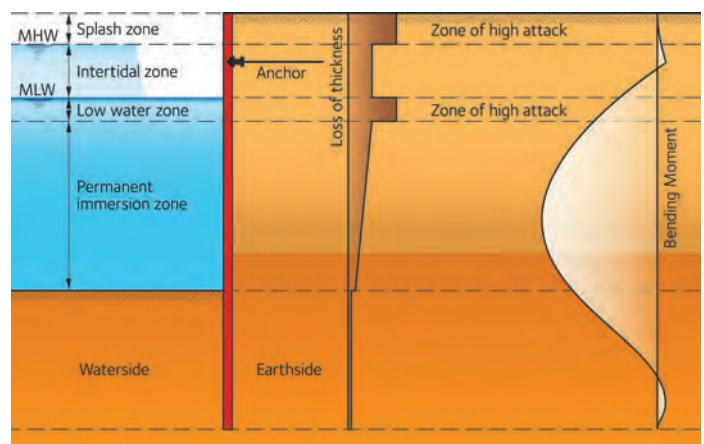

Please refer to EN 1993-5:2007 for details on loss of steel thickness as a result of exposure in different media.

The use of the steel grade AMLoCor® significantly increases the design life of marine structures.



## Surface coating

The classical corrosion protection for steel sheet piling is surface coating. EN ISO 12944 deals with protection by paint systems and its various parts cover all the features that are important in achieving adequate corrosion protection. It is essential that the steel surface is properly prepared before applying a coating system: removal of millscale by abrasive blasting (cf. ISO 8501-1). Most systems consist of one or two primers, an intermediate coat and a topcoat. Zinc primers are used frequently due to their good corrosion-inhibiting properties.

Intermediate coats increase the total thickness and thus increase the distance for moisture diffusion to the surface. Topcoats are chosen for colour and gloss retention, for chemical resistance, or for additional resistance to mechanical damage. Epoxies are generally used for seawater immersion and chemical resistance, polyurethanes for colour and gloss retention. Below, paint systems are proposed for different environments according to classifications of EN ISO 12944.



Metro Copenhagen, Denmark

## Atmospheric exposure

Some applications require a stronger aesthetic component, where the steel sheet pile wall appearance is very relevant. In those cases, polyurethane finishes – which are easy to apply and maintain – are the preferred choice, mainly due to their good gloss and colour retention characteristics.

### Proposal (EN ISO 12944 – Table A4, corrosivity category C4):

Epoxy primer  
Recoatable epoxy intermediate coating  
Aliphatic polyurethane topcoat  
Nominal dry-film thickness of the system: 240 µm



Flood protection wall, Hamburg, Germany




## Sea water & fresh water immersion Im1 / Im2

For long-term performance of steel structures immersed in sea water and in fresh water there should be no compromise on quality of the coating system, particularly as it may be damaged due to abrasion and impact. The application must be properly carried out and inspected on a regular basis. Cathodic protection is sometimes specified in combination with a (fully compatible) coating system.

### Proposal (EN ISO 12944 – Table A6, corrosivity category Im2)

Epoxy primer  
Solvent-free epoxy coating or epoxy glass flake  
Nominal dry-film thickness of the system: 500–550  $\mu\text{m}$

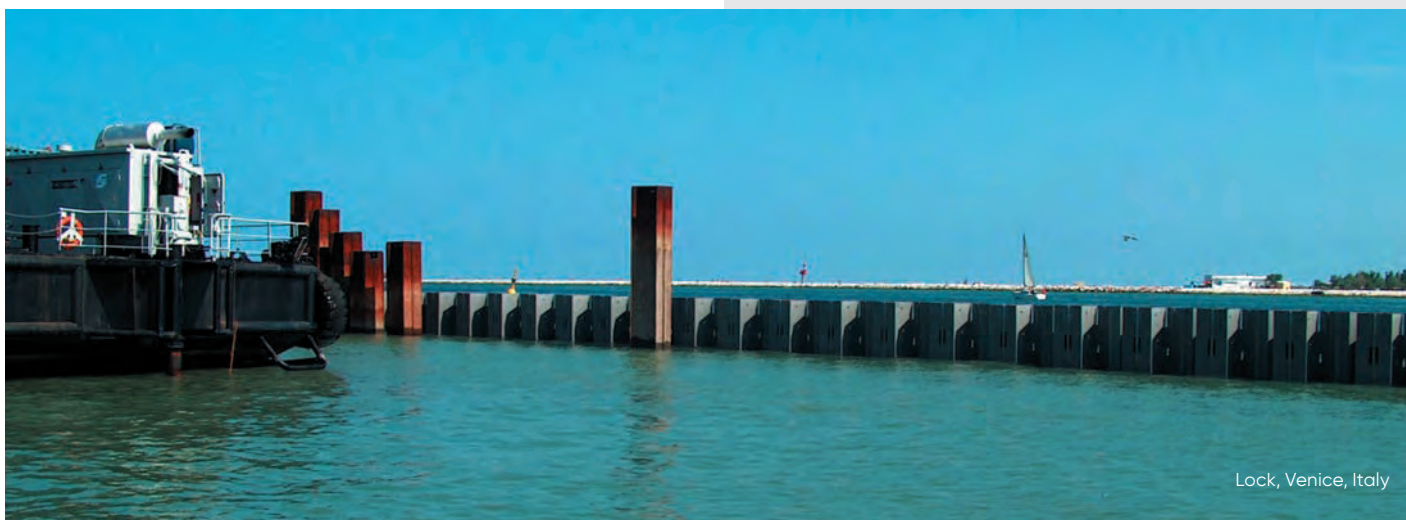

Lock, Venice, Italy

## Landfills and contaminated soils

Excellent protection is essential due to exposure to highly aggressive substances. The coating system must have outstanding resistance to mineral and organic acids and other chemicals as well as capacity to withstand abrasion and impacts.

### Proposal

Micaceous iron oxide pigmented polyamide  
cured epoxy primer  
Polyamide-cured-epoxy coating  
with increased chemical resistance  
Nominal dry-film thickness of the system: 480  $\mu\text{m}$




Waste disposal, Horn, Austria

# AMLoCor®

Corrosion resistant steel grade for marine applications

**AMLoCor®** is ArcelorMittal's "low corrosion" steel grade that will revolutionize the design of port structures in the future.

The key advantage of **AMLoCor®** is a significant reduction of the corrosion rates in the "Low Water Zone" (LWZ) and in the "Permanent Immersion Zone" (PIZ), which is normally the location of the maximum bending moments and consequently highest steel stresses. This steel grade is the solution to address the major concern of designers and port authorities: **durability of marine structures** like quay walls, breakwaters and jetties.

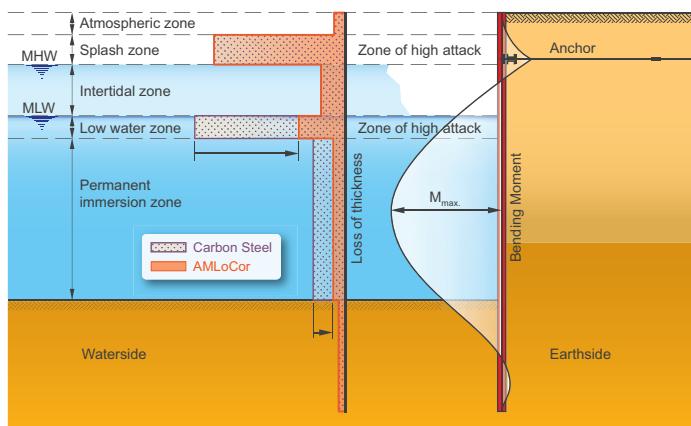


Typical loss of steel thickness in a marine environment of regular carbon steel vs. AMLoCor®.

Eurocode 3 Part 5 contains reference tables with typical corrosion rates valid for standard carbon steel in northern European countries. In-situ tests have proven that the **loss of steel thickness of AMLoCor is reduced by a factor 3 (PIZ) to 5 (LWZ) compared to standard structural steel** in the critical zones.

**AMLoCor leads to considerable savings in steel weight** compared to the unprotected carbon steel piling solution, as soon as loss of steel thickness due to corrosion in the immersion zone is significant. Cathodic protection or coatings can be used to increase the service life of the sheet pile structure. However, **AMLoCor® will in many cases yield the most cost-effective solution in the long-term**. AMLoCor is compatible with cathodic protection and coatings.

In addition AMLoCor protects the structures from "ALWC" (Accelerated Low Water Corrosion) which is related to biological activity enhancing degradation of steel in the low water zone.

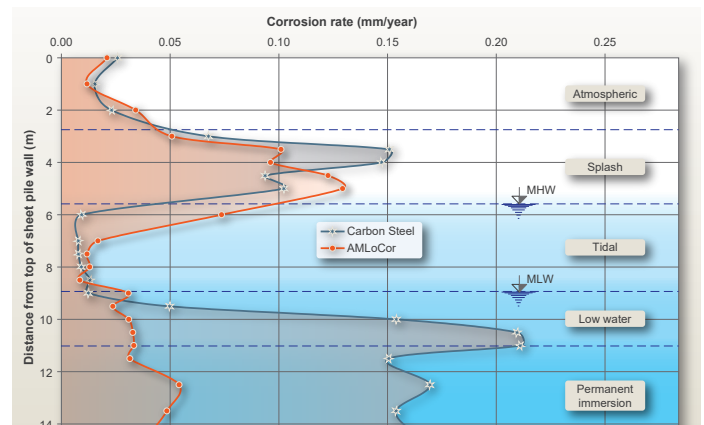


Steel grades AMLoCor are covered by the German National Technical Approval Z-30.10-55 of the "Deutscher Institut für Bautechnik (DIBt)".

The mechanical properties of AMLoCor steel are fully equivalent to standard piling grades, so that structural resistance can be determined according to all relevant design codes used for steel sheet piling structures, like EN 1993-5:2007 in European countries.

Some AZ sections are already available in AMLoCor steel grades, ranging from **AMLoCor Blue 320 to Blue 390** (yield strength 320 MPa up to 390 MPa). Please check our website for regular updates on available sections.

A driving test was performed in very compact soil in Denmark. Sheet piles in S 355 GP and AMLoCor Blue 355 were driven into very hard soils with some boulders. The sheet piles were monitored during driving, then pulled out and inspected. This test has demonstrated that the behaviour of AMLoCor sheet piles is equivalent to regular carbon steel sheet piles.

For more detailed information (e.g. on welding) please check our **brochure "AMLoCor®"**.

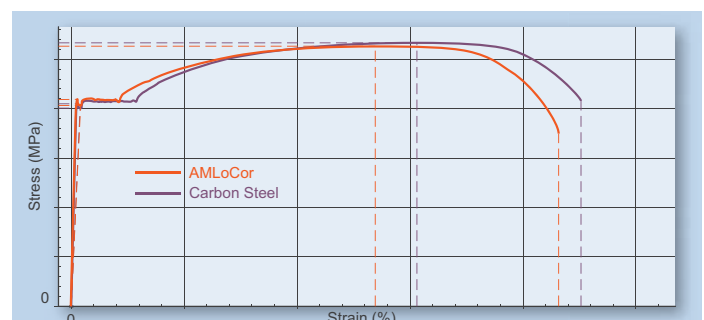

Typical Stress - Strain diagram of carbon steel & AMLoCor®.



# Watertightness

Steel sheet piles are completely impervious. The only possibility of water infiltrating through a sheet pile wall is through the interlock. Due to its shape, the Larssen interlock naturally provides high seepage resistance.

Sealing systems are therefore not necessary for applications such as temporary retaining walls where moderate rates of

seepage are acceptable. If medium to high seepage resistance is required, e.g. cut-off walls for contaminated sites, retaining structures for bridge abutments or tunnels, double sheet piles with sealed or welded joints are recommended.

**Please refer to our brochure "The impervious sheet pile walls" for further details.**

The following sealing systems are used to increase the watertightness of sheet pile walls:

- bituminous filler: **Beltan® Plus**,  
maximal water pressure: 100 kPa;
- wood-resin based filler: **Seline®**,  
maximal water pressure: 200 kPa;
- water-swelling product: **ROXAN® Plus** System,  
maximal water pressure: 200 kPa;
- **AKILA®** System, maximal water pressure: 300 kPa;
- welding: 100% watertight.

As Darcy's law for discharge through homogenous structures is not applicable to leakage phenomenon through sheet pile interlocks, a new concept of "joint resistance" has been developed by GeoDelft (Deltares).


$$q(z) = \rho \cdot \Delta p(z) / \gamma_w$$

$q(z)$  water discharge [m<sup>3</sup>/s/m]  
 $\rho$  inverse joint resistance [m/s]  
 $\Delta p(z)$  pressure drop at level  $z$  [kPa]  
 $\gamma_w$  unit weight of water [kN/m<sup>3</sup>]

| Sealing system/method    | $\rho$ [10 <sup>-10</sup> m/s] |                 |         | Application of the system | Cost ratio <sup>1)</sup> |
|--------------------------|--------------------------------|-----------------|---------|---------------------------|--------------------------|
|                          | 100 kPa                        | 200 kPa         | 300 kPa |                           |                          |
| No sealant               | > 1000                         | –               | –       | –                         | 0                        |
| <b>Beltan® Plus</b>      | < 600                          | not recommended | –       | easy                      | 1.0                      |
| <b>Seline®</b>           | < 600                          | < 700           | –       | easy                      | 1.1                      |
| <b>ROXAN® Plus</b>       | 0.5                            | 0.5             | –       | with care                 | 1.8                      |
| <b>AKILA®</b>            | 0.3                            | 0.3             | 0.5     | with care                 | 2.1                      |
| <b>Welded interlocks</b> | 0                              | 0               | 0       | 2)                        | 5.0                      |

<sup>1)</sup> Cost ratio =  $\frac{\text{Cost of sealing system}}{\text{Cost of Beltan® Plus Solution}}$

<sup>2)</sup> After excavation for the interlock to be threaded on jobsite.

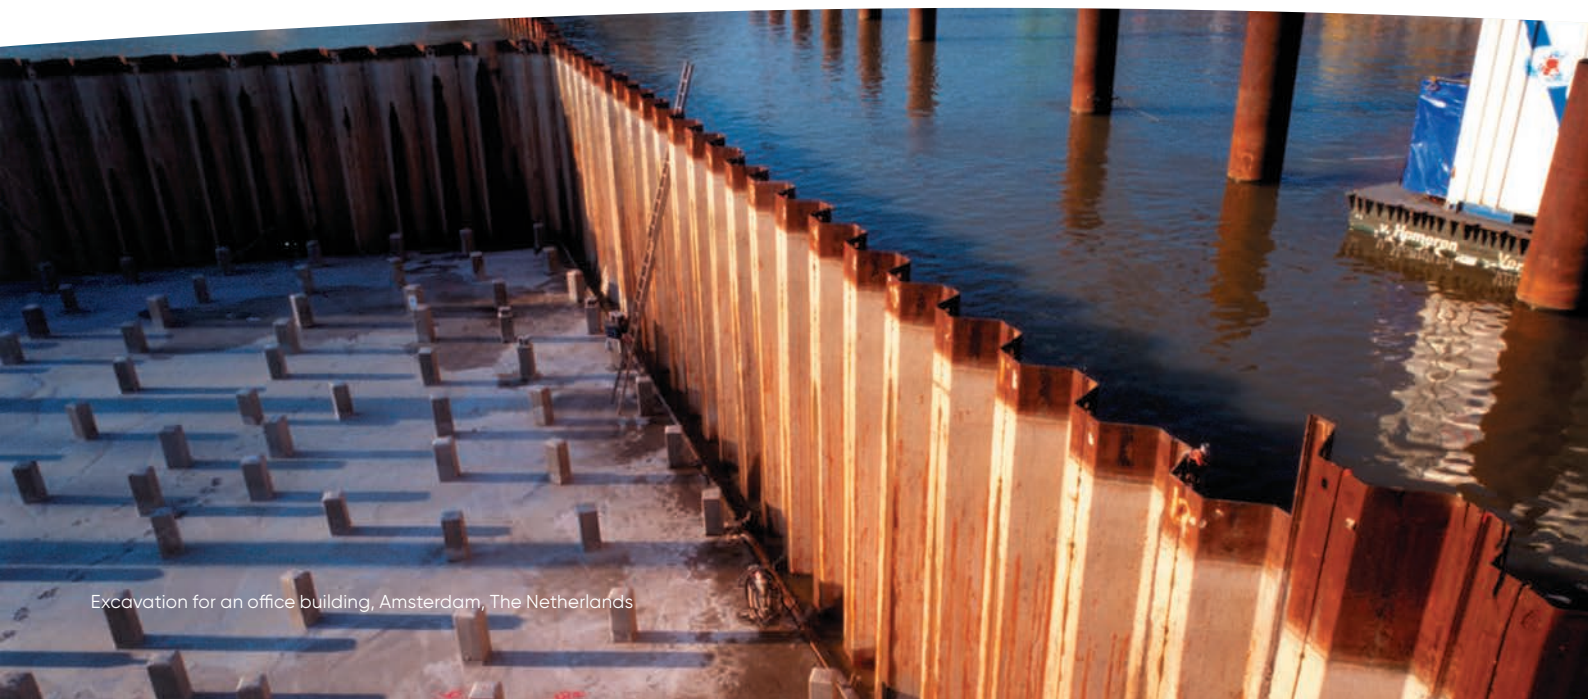

Excavation for an office building, Amsterdam, The Netherlands



## Seline®

Seline® is a newly developed sealant for steel sheet piles from ArcelorMittal, produced from natural balsam resin as an alternative to conventional sealing systems. Also known as colophony or gum rosin, balsam resin is a naturally occurring material derived from pine trees, obtained by collecting resin exuded from the bark. It has been employed since ancient times by the Romans and Egyptians for its adhesive and sealing properties.

**Seline® is ideally suited for temporary and permanent sheet pile wall structures.**


ArcelorMittal is the only sheet piling supplier that has implemented a realistic testing procedure to ensure the performance of its products under real-life conditions. Once the laboratory tests had been completed and validated, the most important step to be followed was installation on site, followed by a direct watertightness test. For this purpose, the sealed sheet piles were driven into a hard clay soil and the watertightness tests were carried out under the supervision of the independent testing institute DNV/GL. The results showed that, after 72 hours and under ascending water pressure from 100 kPa (1 bar) to 300 kPa (3 bar), Seline® improved the performance compared to the well-established sealants. The average inverse joint resistance  $\rho_m$  was determined according to EN 12063, see table below:

|                | $\rho_m$ ( $10^{-10}$ m/s) |         |
|----------------|----------------------------|---------|
| Water pressure | 100 kPa                    | 200 kPa |
| Seline®        | < 600                      | < 700   |

## AKILA® sealing system

AKILA® is a **high performance sealing system** for ArcelorMittal steel sheet piles. The system is based on three sealing "lips" mechanically extruded into the free interlocks using a product called MSP-1. The common interlock of double piles is sealed with a second product called MSP-2.

MSP-1 and MSP-2 belong to the family of **silane modified polymers** (MS-Polymers) and are single component elastic sealants. They are UV-stable and have an **excellent adhesion to steel**. Both products are resistant to humidity, and temperatures between -40°C and +90°C (even up to 120°C for short periods). They are durable in contact with freshwater, seawater as well as various hydrocarbons, bases and acids (depending on concentration) – a complete list is available on request.

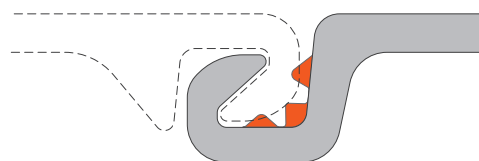


MSP-1 product extruded into the free interlock.

**Seline® is a natural product** and does not contain any substances that have to be listed in accordance with Regulation (EC) No. 1907/2006 (REACH). Like all ArcelorMittal sealing systems/materials, Seline® has also been tested by the "Hygiene-Institut des Ruhrgebiets". The tests showed that the use of **Seline® can be assessed as harmless** from an ecotoxicological point of view.

**Seline® is heated in a similar way to bitumen-based sealants** and then filled into the clean and dry interlocks of the horizontally laid out sheet pile using a suitable pouring device.

The driving direction and the position in relation to the water pressure must be observed: The filled interlock must be installed on the side of the water. Seline® is suitable for all sheet pile driving methods (impact, vibratory and press-in).

### Detail of application in Z-piles

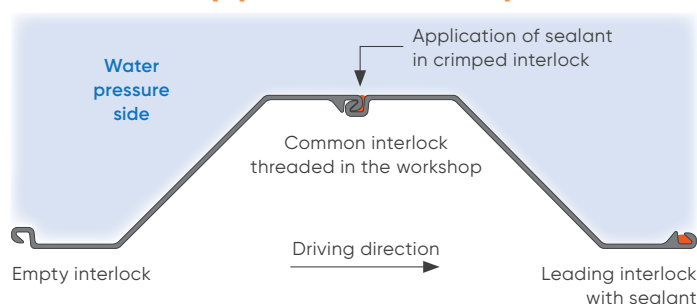

A series of in-situ tests were carried out in stiff clays and in soft sandy soils. After installation, watertightness was tested at water pressures of 2 and 3 bar, according to a procedure developed by Delft Geotechnics (Deltares) and ArcelorMittal. The testing and the results were witnessed and certified by "Germanischer Lloyd", an independent third party. The average inverse joint resistance  $\rho_m$  was determined according to EN 12063, see table below:

|                              | $\rho_m$ ( $10^{-10}$ m/s) |         |
|------------------------------|----------------------------|---------|
| Water pressure               | 200 kPa                    | 300 kPa |
| Single piles (MSP-1)         | 0.49                       | 0.86    |
| Double piles (MSP-1 & MSP-2) | 0.33                       | 0.47    |

MS-Polymers are solvent free and do not contain isocyanates. They can be considered environment-friendly products. AKILA® is certified by the "Hygiene-Institut des Ruhrgebiets" in Germany as **suitable for use in contact with groundwater**.

Refer to our "AKILA® Sealing System" flyer for recommendations on installation of sheet piles fitted with the AKILA® system.

# Sustainability & Environmental Product Declaration (EPD)

ArcelorMittal champions steel's ability to create high quality, sustainable lifestyles for people all over the world. In 2010, it was the first steel manufacturer that performed a Life Cycle Assessment (LCA) dedicated to steel sheet piles.


ArcelorMittal's hot rolled and cold formed steel sheet piles are covered by several Environmental Product Declarations (EPD). Its first EPD was published in 2016.

ArcelorMittal's brand values are health & safety, sustainability, quality and leadership. As a leading global steel producer, ArcelorMittal ambitions to achieve net-zero greenhouse gas emissions by 2050.

ArcelorMittal Sheet Piling's goal is to provide cost-effective and sustainable foundation solutions that take into account society's expectations for the preservation of our planet. ArcelorMittal's steel sheet piles are construction product produced in European facilities that report transparent indicators of their environmental performance. They have certified health & safety, environmental, energy and quality management systems.

Steel is a permanently recyclable material. It can be reused and recycled repeatedly without loss of its core properties. It will play a critical role in building the circular economy of the future. Steel will continue to evolve, becoming smarter, and increasingly sustainable.

## Circular economy

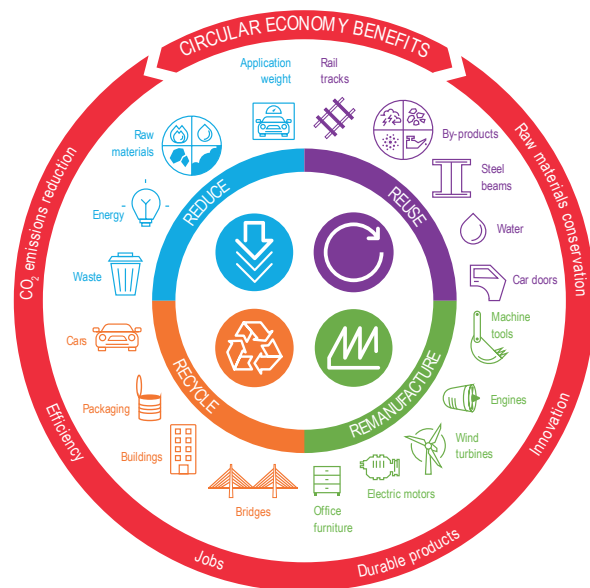

© World Steel Association (worldsteel)

ArcelorMittal Sheet Piling is a major actor in the circular economy, promoting greater resource productivity, aiming to reduce waste and avoid pollution. This contrasts with a linear take-make-dispose economy, which wastes large amounts of resources, energy, and labour. One of the main objectives of circular economy is to reduce waste systematically throughout the different life cycles of a product. Circular economy refers usually to numerous R's: **Reduce**, **Reuse**, **Remanufacture**, **Recycle**,...

Steel is a permanent material: never consumed, but continuously transformed; the use of natural resources for producing steel the first time is therefore a transformative process, making iron available in a more "practical form" for subsequent uses (life cycles).

ArcelorMittal has been optimizing its sheet piles for more than 100 years to **reduce** the consumption of raw materials. For instance, using the latest AZ-800 range saves up to 10% of steel compared to an equivalent profile from the AZ-700 range. Additionally, steel sheet piles can be **reused** up to 10 times in temporary applications. And at the end of the service life of the structure, 100% can be recovered and 100% can be **recycled**. 100% of the steel produced in our Luxembourgish steel mills is made out of steel scrap (recycling process).

## Quality management and certifications

Customer satisfaction is our main goal. Our mills are certified in accordance to international standards ISO 9001, ISO 14001, ISO 50001, ISO 45001 as well as ResponsibleSteel™. This is essential to maintain the high quality of our products and to develop innovative solutions.

## ArcelorMittal's XCarb® and EcoSheetPile™ Plus

ArcelorMittal's XCarb® brand unifies steelmaking innovations and initiatives supporting our ambition to achieve net-zero greenhouse gas emissions by 2050. Within this framework, the **XCarb® Recycled and Renewably Produced** initiative groups all products manufactured in Electric Arc Furnaces using up to 100% steel scrap and 100% renewable electricity from solar or wind power. This electricity is independently verified through a "Guarantee of Origin" certificate. **EcoSheetPile™ Plus** is part of the **XCarb® Recycled and Renewably Produced** initiative and is produced using 100% scrap input and 100% renewable electricity.

## EcoSheetPile™ Plus

**XCarb®**  
Recycled and renewably  
produced

## Life Cycle Assessment (LCA)

Developed in the 1990's, the Life Cycle Assessment is a standardised methodology that analyses the environmental impacts of a product or a service during its production, use phase and end-of-life (ISO 14040). It is an important tool to the steel industry as a way to assess and quantify the environmental footprint of steel products along their entire

life cycle, from the sourcing of the natural resources, to its end-of-life and recycling phase. When performing an LCA it is also important to define the frame in which the assessment is made. An LCA can be used to compare the environmental impact of different solutions and/or products from different manufacturers.

## Environmental Product Declaration (EPD)

An EPD is a verified and registered document that communicates transparent data about the life cycle environmental impact of one or more products. It is usually developed by the manufacturer, peer reviewed by an independent verifier on the basis of ISO 14025 and EN 15804

standards, and published by an official EPD programme operator. Thus, EPDs provide suitable and objective data that can be used in public procurement processes. An EPD is valid for a period of 5 years after publication.

## Sheet piles save lives !

Watch this video to see how sheet piles are crucial in preventing the dramatic consequences of climate change.





## Steel sheet piles' EPDs

ArcelorMittal's sheet piles are covered by several EPDs registered at different programme operators such as *EPD International*, in accordance with the European Standards.

ArcelorMittal analysed the full production process and performed a Life Cycle Assessment of its steel sheet piles.

ArcelorMittal's EPDs are generally of the type **"cradle-to-gate with options"**. They consider the different steps of the steel making process ("cradle to gate"), and additional "options".

The EPDs take into account the following boundary conditions:

- resources: provision of resources, additives and energy;
- transportation of resources and additives to the production site;
- steel making process analysis on site, including energy, production of additives, disposal and valorisation of production residues, and consideration of related emissions;
- waste processing (after-use);
- end-of-life scenarios: reuse and recycling.

Our EPDs contain the following modules:

- A1-A3: structural steel production;
- C1-C4: deconstruction, transport, sorting and shredding of after-use steel, non-recovered scrap due to sorting efficiency;
- D: End-of-Life scenarios, including reuse and recycling.

Due to national requirements, additional modules may be declared in some EPDs. All the data used in the LCA was collected through recommended templates developed by World Steel Association and its experts for Life Cycle Inventories (LCI) purpose.

The data of the different sites was cross-checked and compared to the previous years' data to identify potential inconsistencies. All the processes, materials and emissions that are known to make a significant contribution to the environmental impact were considered. It comprises used materials, thermal energy, electrical energy and fuel consumption as well as emissions from on-site measurements.

Steel sheet piles can be reused several times and recycled at the end of life. The assumption made in our EPDs for hot rolled sheet piles is that for each tonne produced, 25% will be reused. 60% of the steel sheet piles are recycled after the first use, and 15% will be landfilled. The different assumptions are detailed in each specific EPD document.

Although the period in which the steel sheet piles are used in their different applications is not defined in the EPD, it is important to define their service life to highlight their durability as a construction material. Steel sheet piles can be designed for 50 years and more, and there are documented cases of sheet pile walls built in the early 20<sup>th</sup> century that are still in use.

ArcelorMittal Sheet Piling has published several EPDs since 2016. As the applicable standards and local regulations can change, please contact our sustainability department for more information on all available EPDs.

Currently, the EPDs listed below are published by the respective programme operators and are valid for the corresponding steel sheet pile profiles presented in this catalogue:

- **"EcoSheetPile™ Plus"** EPD published in 2023 by EPD International AB (S-P-11071) and INIES (20230734528), in 2024 by SCS Global Services (SCS-EPD-09981) and in 2026 by MRPI (1.1.01103.2026)
- **"Steel Sheet Piles (GU® Type)"** EPD published in 2024 by EPD International AB (S-P-12973).
- **"Cold Formed Steel Sheet Piles"** published in 2025 by INIES (20250645521) and MRPI (1.1.00914.2025).

The **EcoSheetPile™ Plus** EPD covers hot rolled steel sheet piles in the AZ®, AU™, PU®, AS 500® and HZ®-M ranges, produced by ArcelorMittal with 100% steel scrap and 100% renewable electricity in the plants of Belval and Differdange (Luxembourg).

The **Steel Sheet Piles (GU® Type)** EPD includes all hot rolled steel sheet piles in the GU-type profile, produced by ArcelorMittal in the plant of Dabrowa Gornicza (Poland).

The **Cold Formed Steel Sheet Piles** EPD covers all cold formed sheet piles in the PAL, PAU and PAZ ranges as well as all RC trench sheets, produced by ArcelorMittal in the plant of Messempré (France).

**Note:** a comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to EN 15804 and if the building context, respectively the product-specific characteristics of performance, are taken into account. The fairest and most objective method to compare different alternatives is to perform an LCA based on the data provided in the EPD of the manufacturer of the product.



Fishing terminal in Norway with XCarb® sheet piles  
© Vestbetong AS

# Delivery conditions

## Tolerances on shape and dimensions of hot rolled steel sheet piles according to EN 10248-2:2024 (reduced tolerances on request)

| Tolerances                                                    | AZ <sup>®</sup>                                                                                      | AU <sup>™</sup> , PU <sup>®</sup> , GU <sup>®</sup>                                                  | AS 500 <sup>®</sup>           | HZ <sup>®</sup> -M                                         |
|---------------------------------------------------------------|------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-------------------------------|------------------------------------------------------------|
| Mass <sup>1)</sup>                                            | ± 5%                                                                                                 | ± 5%                                                                                                 | ± 5%                          | ± 5%                                                       |
| Length (L)                                                    | ± 200 mm                                                                                             | ± 200 mm                                                                                             | ± 200 mm                      | ± 200 mm                                                   |
| Height (h) <sup>2)</sup>                                      | h ≥ 300 mm: ± 7 mm                                                                                   | h ≤ 200 mm: ± 4 mm<br>h > 200 mm: ± 5 mm                                                             | -                             | h > 500 mm: ± 7 mm                                         |
| Thicknesses (t <sub>r</sub> , t <sub>w</sub> ) <sup>3)</sup>  | t <sub>r</sub> , t <sub>w</sub> ≤ 8.5 mm: ± 0.5 mm<br>t <sub>r</sub> , t <sub>w</sub> > 8.5 mm: ± 6% | t <sub>r</sub> , t <sub>w</sub> ≤ 8.5 mm: ± 0.5 mm<br>t <sub>r</sub> , t <sub>w</sub> > 8.5 mm: ± 6% | t <sub>w</sub> > 8.5 mm: ± 6% | t <sub>r</sub> , t <sub>w</sub> > 12.5 mm: -1.5 mm/+2.5 mm |
| Width single pile (w)                                         | ± 2% w                                                                                               | ± 2% w                                                                                               | ± 2% w                        | ± 2% w                                                     |
| Width double pile (w)                                         | ± 3% w                                                                                               | ± 3% w                                                                                               | -                             | -                                                          |
| Width triple pile (w)                                         | -                                                                                                    | ± 3% w                                                                                               | -                             | -                                                          |
| Straightness (S)                                              | 0.2% L                                                                                               | 0.2% L                                                                                               | 0.2% L                        | 0.2% L                                                     |
| Squareness of ends of profiles (p)                            | single pile: 2% w<br>double pile: 1% w                                                               | single pile: 2% w<br>double pile: 1% w                                                               | single pile: 2% w             | single pile: 4% h<br>single pile: 2% w                     |
| Misalignment of the head of double and triple sheet piles (q) | 20 mm                                                                                                | 20 mm                                                                                                | -                             | 20 mm                                                      |


<sup>1)</sup> Of one piece.<sup>2)</sup> Of single pile.<sup>3)</sup> Positive tolerances for AZ, U-sections and AS 500 defined by ArcelorMittal as per Option 2, Clause 13 of EN 10248-2:2024.

## Measurement of width of hot rolled steel sheet piles

EN 10248-2:2024

|                                            | b (S) | b (D) | b (T) | w (S) | w (D)  | w (T)  |
|--------------------------------------------|-------|-------|-------|-------|--------|--------|
|                                            | mm    | mm    | mm    | mm    | mm     | mm     |
| AZ 18-800 to AZ 27-800                     | 800   | 1600  | -     | 835.5 | 1635.5 | -      |
| AZ 28-750 to AZ 32-750                     | 750   | 1500  | -     | 785.5 | 1535.5 | -      |
| AZ 12-770 to AZ 14-770-10/10               | 770   | 1540  | -     | 805.5 | 1575.5 | -      |
| AZ 12-700 to AZ 52-700                     | 700   | 1400  | -     | 735.5 | 1435.5 | -      |
| AZ 18 to AZ 26                             | 630   | 1260  | -     | 665.5 | 1295.5 | -      |
| AU 14 to AU 16                             | 750   | 1500  | 2250  | 784.5 | 1534.5 | 2284.5 |
| AU 18 to AU 25                             | 750   | 1500  | 2250  | 785.5 | 1535.5 | 2285.5 |
| PU 12 to PU 18 <sup>-1</sup>               | 600   | 1200  | 1800  | 634.5 | 1234.5 | 1834.5 |
| PU 22 <sup>-1</sup> to PU 32 <sup>-1</sup> | 600   | 1200  | 1800  | 635.5 | 1235.5 | 1835.5 |
| GU 6N to GU 8S                             | 600   | 1200  | 1800  | 631.5 | 1231.5 | 1831.5 |
| GU 10N to GU 15N                           | 600   | 1200  | 1800  | 632.5 | 1232.5 | 1832.5 |
| GU 16N to GU 20N                           | 600   | 1200  | 1800  | 634.5 | 1234.5 | 1834.5 |
| GU 21N to GU 33N                           | 600   | 1200  | 1800  | 635.5 | 1235.5 | 1835.5 |
| GU 16-400, GU 18-400                       | 400   | 800   | 1200  | 436.0 | 836.0  | 1236.0 |
| AS 500-9.5 to AS 500-13.0                  | 500   |       |       | 546.0 |        |        |

(S) Single pile (D) Double pile (T) Triple pile

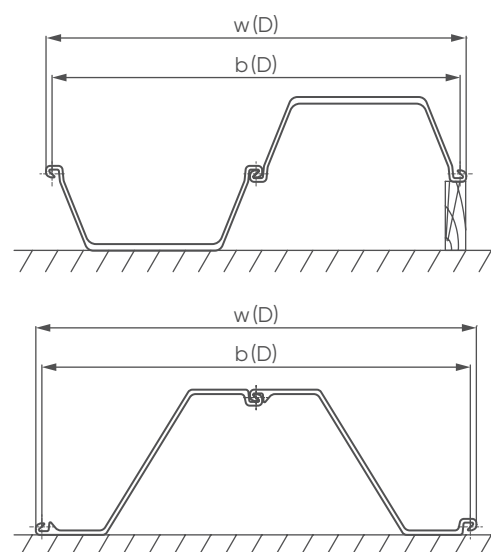

Example for double piles

Please refer to EN 10248-2:2024 for further instructions regarding measurements of dimensions and shape or contact our technical department.

## Maximum rolling lengths (longer sections available on request)

| Section    | AZ | AU, PU | GU <sup>1)</sup> | AS 500 | HZ-M | RH / RZ | OMEGA 18 | C9 / C14 | DELTA 13 |
|------------|----|--------|------------------|--------|------|---------|----------|----------|----------|
| Length [m] | 31 | 31     | 28               | 31     | 33   | 24      | 16       | 18       | 17       |


<sup>1)</sup> Contact us for detailed information.

## Handling holes for hot rolled sections

Sheet pile sections are normally supplied without handling holes. If requested, they can be provided with handling holes in the centreline of the section. The standard handling hole dimensions are as follows:

|                 |    |     |     |     |     |                  |      |
|-----------------|----|-----|-----|-----|-----|------------------|------|
| Diameter D [mm] | 40 | 40  | 40  | 50  | 50  | 60 <sup>2)</sup> | 63,5 |
| Distance Y [mm] | 75 | 150 | 300 | 200 | 250 | 230              | 230  |

<sup>2)</sup> GU profiles have a standard hole diameter of 60 mm.

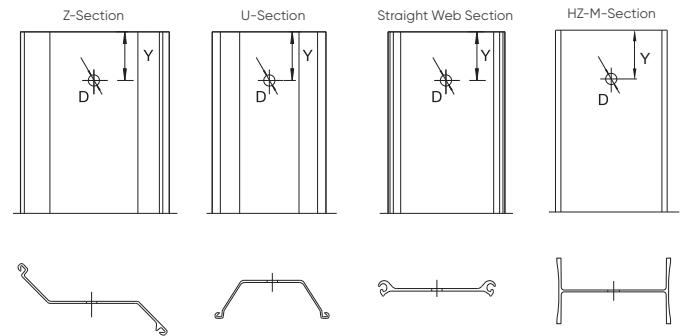

## Markings

The following markings can be supplied on request:

- colour marks defining section, length and steel grade;
- adhesive stickers showing the customer's name, destination, order and item number, type and length of profile and steel grade.

|                                                                 |            |        |                                        |
|-----------------------------------------------------------------|------------|--------|----------------------------------------|
| <br>Made in Luxembourg<br>ArcelorMittal<br>Belval & Differdange | AZ 25-800  | 28000  | mm                                     |
|                                                                 | S 460 GP   |        |                                        |
|                                                                 | 1400004321 | 000070 | CIVIL & COASTAL CONSTRUCTION<br>LONDON |

## Steel grades of hot rolled steel sheet piles

| Steel grade<br>EN 10248-1:2023 | Min. yield<br>strength R <sub>eH</sub> | Min. tensile<br>strength R <sub>m</sub> | Min.<br>elongation<br>L <sub>0</sub> =5.65√S <sub>0</sub> | Chemical composition <sup>1)</sup> (% weight) |      |      |       |       |                 |      |
|--------------------------------|----------------------------------------|-----------------------------------------|-----------------------------------------------------------|-----------------------------------------------|------|------|-------|-------|-----------------|------|
|                                |                                        |                                         |                                                           | C                                             | Mn   | Si   | P     | S     | N <sup>2)</sup> | CEV  |
|                                | MPa                                    | MPa                                     | %                                                         | % max.                                        |      |      |       |       |                 |      |
| S 240 GP                       | 240                                    | 340                                     | 26                                                        | 0.19                                          | 1.50 | –    | 0.050 | 0.050 | 0.014           | 0.38 |
| S 270 GP                       | 270                                    | 410                                     | 24                                                        | 0.20                                          | 1.60 | –    | 0.050 | 0.050 | 0.014           | 0.43 |
| S 320 GP                       | 320                                    | 440                                     | 23                                                        | 0.22                                          | 1.70 | 0.60 | 0.045 | 0.045 | 0.014           | 0.50 |
| S 355 GP                       | 355                                    | 480                                     | 22                                                        | 0.22                                          | 1.70 | 0.60 | 0.045 | 0.045 | 0.014           | 0.50 |
| S 390 GP                       | 390                                    | 490                                     | 20                                                        | 0.22                                          | 1.80 | 0.60 | 0.045 | 0.045 | 0.014           | 0.52 |
| S 430 GP                       | 430                                    | 510                                     | 19                                                        | 0.22                                          | 1.80 | 0.60 | 0.045 | 0.045 | 0.014           | 0.52 |
| S 460 GP                       | 460                                    | 530                                     | 17                                                        | 0.22                                          | 1.80 | 0.60 | 0.045 | 0.045 | 0.014           | 0.52 |
| S 500 GP                       | 500                                    | 580                                     | 15                                                        | 0.22                                          | 1.80 | 0.60 | 0.045 | 0.045 | 0.014           | 0.52 |

| AMLoCor® | Min. yield<br>strength R <sub>eH</sub> | Min. tensile<br>strength R <sub>m</sub> | Min.<br>elongation<br>L <sub>0</sub> =5.65√S <sub>0</sub> | Chemical composition <sup>1)</sup> (% weight) |      |      |      |      |                 |           |
|----------|----------------------------------------|-----------------------------------------|-----------------------------------------------------------|-----------------------------------------------|------|------|------|------|-----------------|-----------|
|          |                                        |                                         |                                                           | C                                             | Mn   | Si   | P    | S    | N <sup>2)</sup> | Cr Al     |
|          | MPa                                    | MPa                                     | %                                                         | % max.                                        |      |      |      |      |                 |           |
| Blue 320 | 320                                    | 440                                     | 23                                                        | 0.27                                          | 1.70 | 0.60 | 0.05 | 0.05 | 0.011           | 0.75 0.40 |
| Blue 355 | 355                                    | 480                                     | 22                                                        | 0.27                                          | 1.70 | 0.60 | 0.05 | 0.05 | 0.011           | 0.75 0.40 |
| Blue 390 | 390                                    | 490                                     | 20                                                        | 0.27                                          | 1.70 | 0.60 | 0.05 | 0.05 | 0.011           | 0.75 0.40 |

<sup>1)</sup> Product analysis.

<sup>2)</sup> The maximum value for nitrogen does not apply if the chemical composition shows a minimum total Al content of 0.015 % or alternatively min. 0.013 % acid soluble Al or if sufficient other N binding elements are present. In this case the N binding elements shall be mentioned in the inspection document.



All the hot rolled sections can be delivered in steel grades according to EN 10248-1:2023, but not all sections are available in all steel grades. The table on this page summarizes the current possibilities.

Special steel grades such as steels with improved corrosion resistance like **AMLoCor** and **ASTM A 690**, or steels with copper addition in accordance with EN 10248-Part 1:2023, paragraph 7.2.4 and Option 3 in Chapter 13, can be supplied on request. A modified steel grade A 690 with higher yield strength is also available upon request.

ArcelorMittal can also provide steel grades complying with other standards (see table below).

| Europe | EN 10248-1:2023 | S 270 GP  | S 320 GP  | S 355 GP            | S 390 GP     | S 430 GP     | S 460 GP     |
|--------|-----------------|-----------|-----------|---------------------|--------------|--------------|--------------|
| USA    | ASTM            | A 328     | -         | A 572 Gr. 50; A 690 | A 572 Gr. 55 | A 572 Gr. 60 | A 572 Gr. 65 |
| Canada | CSA             | Gr. 260 W | Gr. 300 W | Gr. 350 W           | Gr. 400 W    | -            | -            |
| Japan  | JIS             | SY 295    | -         | -                   | SY 390       | -            | -            |

| Section        | Steel grade | EN 10248-1:2023    |                 |                 |          |          |                 |                 |          | ASTM  |                 | AMLoCor® |          |          |
|----------------|-------------|--------------------|-----------------|-----------------|----------|----------|-----------------|-----------------|----------|-------|-----------------|----------|----------|----------|
|                |             | S 240 GP           | S 270 GP        | S 320 GP        | S 355 GP | S 390 GP | S 430 GP        | S 460 GP        | S 500 GP | A 572 | A 690           | Blue 320 | Blue 355 | Blue 390 |
| AZ-700 to 800  |             | ✓ <sup>1)</sup>    | ✓               | ✓               | ✓        | ✓        | ✓               | ✓               | ❖        | ✓     | ✓               |          |          |          |
| AZ             |             | ✓ <sup>1)</sup>    | ✓               | ✓               | ✓        | ✓        | ✓               | ✓               | ❖        | ✓     | ✓ <sup>1)</sup> |          |          |          |
| AU             |             | ✓ <sup>1)</sup>    | ✓               | ✓               | ✓        | ✓        | ✓               | ✓               | ❖        | ✓     | ✓               |          |          |          |
| PU             |             | ✓ <sup>1),2)</sup> | ✓ <sup>2)</sup> | ✓ <sup>2)</sup> | ✓        | ✓        | ✓ <sup>3)</sup> | ✓ <sup>3)</sup> | ❖        | ✓     | ✓ <sup>3)</sup> |          |          |          |
| GU-N/S         |             | ✓ <sup>1)</sup>    | ✓               | ✓               | ✓        | ✓        | ✓               | ✓ <sup>4)</sup> | ✗        | ❖     | ✗               |          |          |          |
| GU-400         |             | ✓ <sup>1)</sup>    | ✓               | ✓               | ✓        | ✓        | ❖               | ❖               | ✗        | ❖     | ✗               |          |          |          |
| HZ-M           |             | ✓ <sup>1)</sup>    | ✓               | ✓               | ✓        | ✓        | ✓               | ✓               | ❖        | ✓     | ✓               |          |          |          |
| RH / RZD / RZU |             | ✗                  | ✗               | ✗               | ✗        | ✗        | ✓               | ✓               | ❖        | ✗     | ✓               |          |          |          |
| C 9            |             | ✗                  | ✗               | ✗               | ✓        | ✗        | ✗               | ✗               | ✗        | ✓     | ✗               |          |          |          |
| C 14           |             | ✗                  | ✗               | ✗               | ✓        | ✗        | ✗               | ✗               | ✗        | ✗     | ✗               |          |          |          |
| Delta 13       |             | ✗                  | ✗               | ✗               | ✓        | ✗        | ✗               | ✗               | ✗        | ✗     | ✗               |          |          |          |
| Omega 18       |             | ✗                  | ✗               | ✗               | ✗        | ✗        | ✓               | ✓               | ✗        | ✗     | ✗               |          |          |          |
| AZ 20-800      |             |                    | ✓               | ✓               | ✓        | ✓        | ✓               | ✓               | ✓        |       |                 | ✓        | ✓        | ✓        |
| AZ 30-750      |             |                    | ✓               | ✓               | ✓        | ✓        | ✓               | ✓               | ✓        |       |                 | ✓        | ✓        | ✗        |
| AZ 19-700      |             |                    | ✓               | ✓               | ✓        | ✓        | ✓               | ✓               | ✓        |       |                 | ✓        | ✓        | ✓        |
| AZ 20-700      |             |                    | ✓               | ✓               | ✓        | ✓        | ✓               | ✓               | ✓        |       |                 | ✓        | ✓        | ✓        |
| AZ 26-700      |             |                    | ✓               | ✓               | ✓        | ✓        | ✓               | ✓               | ✓        |       |                 | ✓        | ✓        | ✓        |
| AZ 26-700N     |             |                    | ✓               | ✓               | ✓        | ✓        | ✓               | ✓               | ✓        |       |                 | ✓        | ✓        | ✓        |
| AZ 28-700      |             |                    | ✓               | ✓               | ✓        | ✓        | ✓               | ✓               | ✓        |       |                 | ✓        | ✓        | ✓        |
| AZ 38-700N     |             |                    | ✓               | ✓               | ✓        | ✓        | ✓               | ✓               | ✓        |       |                 | ✓        | ✓        | ✗        |
| AZ 40-700N     |             |                    | ✓               | ✓               | ✓        | ✓        | ✓               | ✓               | ✓        |       |                 | ✓        | ✓        | ✗        |
| AZ 44-700N     |             |                    | ✓               | ✓               | ✓        | ✓        | ✓               | ✓               | ✓        |       |                 | ✓        | ✓        | ✗        |
| AZ 46-700N     |             |                    | ✓               | ✓               | ✓        | ✓        | ✓               | ✓               | ✓        |       |                 | ✓        | ✓        | ✗        |
| AZ 26          |             |                    | ✓               | ✓               | ✓        | ✓        | ✓               | ✓               | ✓        |       |                 | ✓        | ✓        | ✓        |
| C 9            |             |                    | ✗               | ✓               | ✗        | ✗        | ✗               | ✗               | ✗        |       |                 | ✗        | ✓        | ✗        |

<sup>1)</sup> Please contact us as some limitations may apply.

<sup>2)</sup> Except PU 12 & derivatives.

<sup>3)</sup> PU 12 & derivatives on request.

<sup>4)</sup> GU 11N & derivatives on request.

**Please contact us for information.**

Galvanisation has an influence on the required chemical composition of the steel and must therefore be specified in the purchase orders.

**We strongly recommend informing us of all surface treatments to be applied to the product at the time of enquiry and order.**

✓ Available  
❖ On request  
✗ Currently unavailable

## Tolerances on shape and dimensions of cold formed steel sheet piles according to EN 10249-2:2024

| Designation                                           | Nominal dimension                        | Tolerances                |
|-------------------------------------------------------|------------------------------------------|---------------------------|
| Height (h)                                            | $h \leq 200 \text{ mm}$                  | $\pm 4 \text{ mm}$        |
|                                                       | $200 \text{ mm} < h \leq 300 \text{ mm}$ | $\pm 6 \text{ mm}$        |
|                                                       | $300 \text{ mm} < h \leq 400 \text{ mm}$ | $\pm 8 \text{ mm}$        |
|                                                       | $400 \text{ mm} < h$                     | $\pm 10 \text{ mm}$       |
| Width (w)                                             | Single sheet piles                       | $\pm 2\% w$               |
|                                                       | Double Z sheet piles                     | $\pm 3\% w$               |
| Straightness Sweep (S)                                | all lengths L                            | $\leq 0.25\% L$           |
| Straightness Bow (C)                                  | all lengths L                            | $\leq 0.25\% L$           |
| Straightness Twist (V)                                | all lengths L                            | $\leq 2\% L$              |
|                                                       |                                          | and $\leq 100 \text{ mm}$ |
| Length (L) (*)                                        |                                          | $\pm 50 \text{ mm}$       |
| Squareness of ends of profiles (p)                    | all widths w                             | $< 2\% w$                 |
| Misalignment of the head of Z-shaped double piles (q) | all widths w                             | 20 mm                     |
| Mass of one piece (*)                                 |                                          | $\pm 7\%$                 |

(\*) Reduced tolerances are available on request.

**Note:** The tolerances on thickness shall comply with the requirements of EN 10051.

## Measurement of width of cold formed steel sheet piles

| EN 10249-2:2024      | b (S) | w (D) |
|----------------------|-------|-------|
|                      | mm    | mm    |
| PAZ 3450             | 625   | 1299  |
| PAZ 3460             | 625   | 1299  |
| PAZ 3470             | 625   | 1300  |
| PAZ 4350 to PAZ 4370 | 770   | 1585  |
| PAZ 4450 to PAZ 4470 | 725   | 1496  |
| PAZ 4550             | 676   | 1397  |
| PAZ 4560             | 676   | 1398  |
| PAZ 4570             | 676   | 1396  |
| PAZ 4650 to PAZ 4670 | 621   | 1287  |
| PAZ 5360 to PAZ 5390 | 857   | 1774  |
| PAZ 5460             | 807   | 1677  |
| PAZ 5470             | 807   | 1677  |
| PAZ 5480             | 807   | 1678  |
| PAZ 5490             | 807   | 1678  |
| PAZ 54100            | 808   | 1680  |
| PAZ 5560             | 743   | 1550  |
| PAZ 5570             | 743   | 1550  |
| PAZ 5580             | 744   | 1550  |
| PAZ 5590             | 744   | 1550  |
| PAZ 55100            | 745   | 1553  |
| PAZ 5660             | 671   | 1406  |
| PAZ 5670             | 671   | 1406  |
| PAZ 5680             | 672   | 1407  |
| PAZ 5690             | 672   | 1407  |
| PAZ 56100            | 673   | 1410  |
| RC 8400              | 742   | 762   |
| RC 8500              | 742   | 763   |
| RC 8600 to RC 8800   | 742   | 764   |

| EN 10249-2:2024      | b (S) | w (S) |
|----------------------|-------|-------|
|                      | mm    | mm    |
| PAL 3030 to PAL 3050 | 660   | 692   |
| PAL 3130 to PAL 3150 | 711   | 743   |
| PAL 3260             | 700   | 744   |
| PAL 3270             | 700   | 744   |
| PAL 3280             | 700   | 746   |
| PAL 3290             | 700   | 747   |
| PAU 2240 to PAU 2260 | 921   | 957   |
| PAU 2440 to PAU 2460 | 813   | 848   |
| PAU 2760 to PAU 2780 | 804   | 840   |



## Steel grades of cold formed steel sheet piles

| Steel grade<br>EN 10249-1 <sup>1)</sup> | Min. yield<br>strength $R_{eH}$ | Min. tensile<br>strength $R_m$ | Min. elongation<br>$L_0=5.65\sqrt{S_0}$ |
|-----------------------------------------|---------------------------------|--------------------------------|-----------------------------------------|
|                                         | MPa                             | MPa                            | %                                       |
| S 235 JRC                               | 235                             | 360 – 510                      | 26                                      |
| S 275 JRC                               | 275                             | 410 – 560                      | 23                                      |
| S 355 J0C                               | 355                             | 470 – 630                      | 22                                      |


<sup>1)</sup> Mechanical properties according to EN 10025-2:2004.  
Other steel grades available on request.

## Handling holes for cold formed sections

All sheet pile sections can be supplied with a handling hole. Standard dimensions are as follows:

|           | Diameter | Distance |
|-----------|----------|----------|
|           | D<br>mm  | Y<br>mm  |
| PAL 30-31 | 40       | 150      |
| PAL 32    | 45       | 150      |
| PAU       | 45       | 200      |
| PAZ       | 50       | 200      |

Different dimensions on request.

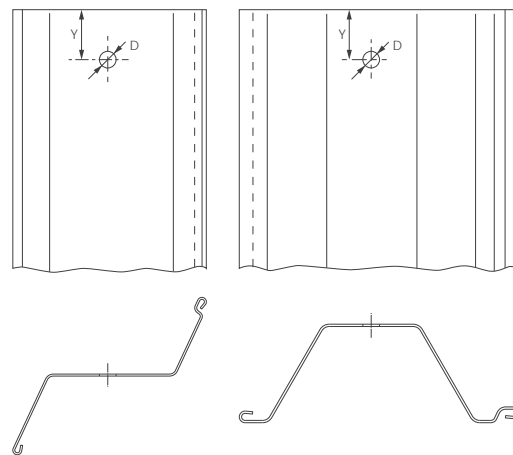

## Geometric tolerances of tubular piles

Tolerance on pile length:  $\pm 200$  mm.

| Standard   | Outside diameter<br>D   | Wall thickness<br>t     | Straightness             | Out-of-roundness | Mass      | Maximum weld<br>bead height <sup>2)</sup> |
|------------|-------------------------|-------------------------|--------------------------|------------------|-----------|-------------------------------------------|
| EN 10219-2 | $\pm 1\%$<br>$\pm 10.0$ | $\pm 10\%$<br>$\pm 2.0$ | 0.20%<br>of total length | $\pm 2\%$        | $\pm 6\%$ | $t \leq 14.2$ : 3.5<br>$t > 14.2$ : 4.8   |

<sup>2)</sup> Tolerance on height of internal and external weld bead for submerged arc-welded hollow sections.

**Note:** values in "mm" except where specified.



## Steel grades of tubular piles

| Steel grade<br>EN 10219-1 | Min. yield<br>strength $R_{eH}$<br>( $t \leq 16$ mm) | Min. yield<br>strength $R_{eH}$<br>( $16 < t \leq 40$ mm) | Min. tensile<br>strength $R_m$<br>( $3 \leq t \leq 40$ mm) | Min.<br>elongation $L_0$<br>( $t \leq 40$ mm) | Chemical composition |      |       |       |      |       |                          |
|---------------------------|------------------------------------------------------|-----------------------------------------------------------|------------------------------------------------------------|-----------------------------------------------|----------------------|------|-------|-------|------|-------|--------------------------|
|                           |                                                      |                                                           |                                                            |                                               | C                    | Mn   | P     | S     | Si   | N     | CEV<br>( $t \leq 20$ mm) |
|                           | MPa                                                  | MPa                                                       | MPa                                                        | %                                             | % max.               |      |       |       |      |       |                          |
| <b>S 235 JRH</b>          | <b>235</b>                                           | 225                                                       | 340–470                                                    | 24                                            | 0.17                 | 1.40 | 0.040 | 0.040 | –    | 0.009 | 0.35                     |
| <b>S 275 JOH</b>          | <b>275</b>                                           | 265                                                       | 410–560                                                    | 20                                            | 0.20                 | 1.50 | 0.035 | 0.035 | –    | 0.009 | 0.40                     |
| <b>S 355 JOH</b>          | <b>355</b>                                           | 345                                                       | 490–630                                                    | 20                                            | 0.22                 | 1.60 | 0.035 | 0.035 | 0.55 | 0.009 | 0.45                     |
| <b>S 420 MH</b>           | <b>420</b>                                           | 400                                                       | 500–660                                                    | 19                                            | 0.16                 | 1.70 | 0.035 | 0.030 | 0.50 | 0.020 | 0.43                     |
| <b>S 460 MH</b>           | <b>460</b>                                           | 440                                                       | 530–720                                                    | 17                                            | 0.16                 | 1.70 | 0.035 | 0.030 | 0.60 | 0.025 | –                        |

| Steel grade<br>API 5L, PSL 1 <sup>1)</sup><br>ISO 3183 | Min. yield<br>strength $R_{eH}$ | Min. tensile<br>strength $R_m$ | Min.<br>elongation <sup>2)</sup> | Chemical composition<br>for tube with $t \leq 25.0$ mm <sup>4)</sup> |                    |       |       |
|--------------------------------------------------------|---------------------------------|--------------------------------|----------------------------------|----------------------------------------------------------------------|--------------------|-------|-------|
|                                                        |                                 |                                |                                  | C <sup>3)</sup>                                                      | Mn <sup>3)</sup>   | P     | S     |
|                                                        | MPa                             | MPa                            | %                                | % max.                                                               |                    |       |       |
| <b>L 245 or B</b>                                      | <b>245</b>                      | <b>415</b>                     | 23                               | 0.26                                                                 | 1.20               | 0.030 | 0.030 |
| <b>L 290 or X 42</b>                                   | <b>290</b>                      | <b>415</b>                     | 23                               | 0.26                                                                 | 1.30               | 0.030 | 0.030 |
| <b>L 320 or X 46</b>                                   | <b>320</b>                      | <b>435</b>                     | 22                               | 0.26                                                                 | 1.40               | 0.030 | 0.030 |
| <b>L 360 or X 52</b>                                   | <b>360</b>                      | <b>460</b>                     | 21                               | 0.26                                                                 | 1.40               | 0.030 | 0.030 |
| <b>L 390 or X 56</b>                                   | <b>390</b>                      | <b>490</b>                     | 19                               | 0.26                                                                 | 1.40               | 0.030 | 0.030 |
| <b>L 415 or X 60</b>                                   | <b>415</b>                      | <b>520</b>                     | 18                               | 0.26 <sup>5)</sup>                                                   | 1.40 <sup>5)</sup> | 0.030 | 0.030 |
| <b>L 450 or X 65</b>                                   | <b>450</b>                      | <b>535</b>                     | 18                               | 0.26 <sup>5)</sup>                                                   | 1.45 <sup>5)</sup> | 0.030 | 0.030 |
| <b>L 485 or X 70</b>                                   | <b>485</b>                      | <b>570</b>                     | 17                               | 0.26 <sup>5)</sup>                                                   | 1.65 <sup>5)</sup> | 0.030 | 0.030 |

<sup>1)</sup> API 5L (2018): American Petroleum Institute. PSL 1 (Product Specification Level 1): Composition according to specification.

<sup>2)</sup> Minimum elongation: depends on tensile test piece cross-sectional area.

<sup>3)</sup> For each reduction of 0.01% below the specified max C concentration, an increase of 0.05% above the specified max Mn concentration is permissible, up to a max of 1.65% for grades L245/B to L360/X52, 1.75% for L390/X56 to L450/X65 and 2.00% for L485/X70.

<sup>4)</sup> 0.50% max for Cu, 0.50% max for Ni, 0.50% max for Cr, 0.15% max for Mb.

<sup>5)</sup> Unless otherwise agreed.









# Documentation

Please refer to our website to download all our documentation: [sheetpiling.arcelormittal.com](https://sheetpiling.arcelormittal.com)  
or contact us via E-mail: [sheetpiling@arcelormittal.com](mailto:sheetpiling@arcelormittal.com)



## Trademarks

ArcelorMittal is the owner of following trademark applications or registered trademarks:

"AS 500", "AU", "AZ", "GU", "HZ", "HZ-M", "HZ/AZ", "PU", "AMLoCor", "AKILA", "Beltan", "ROXAN", "Seline", "HISTAR", "XCarb", "EcoSheetPile".

In communications and documents the symbol <sup>™</sup> or <sup>®</sup> must follow the trademark on its first or most prominent instance, for example: AZ<sup>®</sup>, AU<sup>™</sup>.

Credit lines must be used on all communications and documents where a trademark is used, for example:

AZ is a trademark of ArcelorMittal group

AU, AZ and HZ are trademarks of ArcelorMittal group

AZ 25-800 is a steel sheet pile manufactured by ArcelorMittal group

## Disclaimer

The data and commentary contained within this steel sheet piling document is for general information purposes only. It is provided without warranty of any kind. ArcelorMittal Commercial RPS S.à r.l. shall not be held responsible for any errors, omissions or misuse of any of the enclosed information and hereby disclaims any and all liability resulting from the ability or inability to use the information contained within. Anyone making use of this material does so at his/her own risk. In no event will ArcelorMittal Commercial RPS S.à r.l. be held liable for any damages including lost profits, lost savings or other incidental or consequential damages arising from use of or inability to use the information contained within. Our sheet pile range is liable to change without notice.

Printed in Luxembourg. Printed on FSC paper.

The FSC label certifies that the wood comes from forests or plantations that are managed in a responsible and sustainable way (the FSC principles promote the social, economical, environmental and cultural needs of today's and the next generations).

[www.fsc.org](http://www.fsc.org)



# EcoSheetPile<sup>TM</sup> Plus

ArcelorMittal Commercial RPS S.à r.l.  
Sheet Piling

66, rue de Luxembourg  
L-4221 Esch-sur-Alzette (Luxembourg)

E [sheetpiling@arcelormittal.com](mailto:sheetpiling@arcelormittal.com)  
[sheetpiling.arcelormittal.com](http://sheetpiling.arcelormittal.com)



Hotline: (+352) 5313 3105



ArcelorMittalSP



ArcelorMittal Sheet Piling